

Coffee Table with Hidden Lego Storage

Difficulty

Advanced

I'm a person that likes to have a place for everything, so the fact that our Legos are always strewn about our main living area is very cringy.

Since I haven't been altogether happy with the style of our coffee table anyway, I've been plotting to design/build a new coffee table for our family, complete with hidden Lego storage!

Are you ready to build this baby with us?!













Tools

Kreg Tools

Precision

Router <u>Precision Router Table System</u>

Table System

Precision

Router <u>Precision Router Table Fence</u>

Table Fence

Kreg®

Pocket- Kreg® Pocket-Hole Jig 720PRO

Hole Jig 720PRO

Wood

Project Wood Project Clamp - 3"

Clamp -

3

Other Tools

Track Saw and/or Miter Saw

Radial Arm Saw and/or Miter Saw

Jigsaw or band saw

1/4" round over router bit

3/8" pointed round over router bit

1/4" spiral upcut router bit

Pin Nailer

Materials

Wood Products

- **5** Boards, 1 X 6 X 72"
- 1 MDF Sheet , 1/2 X 24 X 48"
- 1 Plywood Sheet , 1/2 X 24 X 24"

Hardware & Supplies

- 4 12" Tapered Legs
- 1 Wood Glue
- 1 Wood Filler
- 4 Lego Plates
- 4 SOSS Hinges
- 1 Box 1" Pin Nails



Cut List & Parts

- **4** Top,1X6X36"
- **4** Bottom, 1 X 6 X 36"
- **1** Rails , 1/2 X 3/4"
- 1 Rails Corner , 1/2 X 24 X 24" Plywood
- **1** Blocking, 3/4 X 2 X 4 1/4"
- 1 Main Divider
- 1 Small Divider
- 2 Fluting Wrap, 1/2 X 5 1/4 X 48" MDF (Or A Lot Of Dowels)



Directions

1

Join your boards

We laid out our boards for the top and bottom of our coffee table. This pic is just the bottom.








Mark out pocket holes

We marked out increments to decide where the pocket holes should go, and got busy with our Kreg Pocket Hole Jig 720 PRO. It's amazing how fast and convenient it is to add pocket holes now!

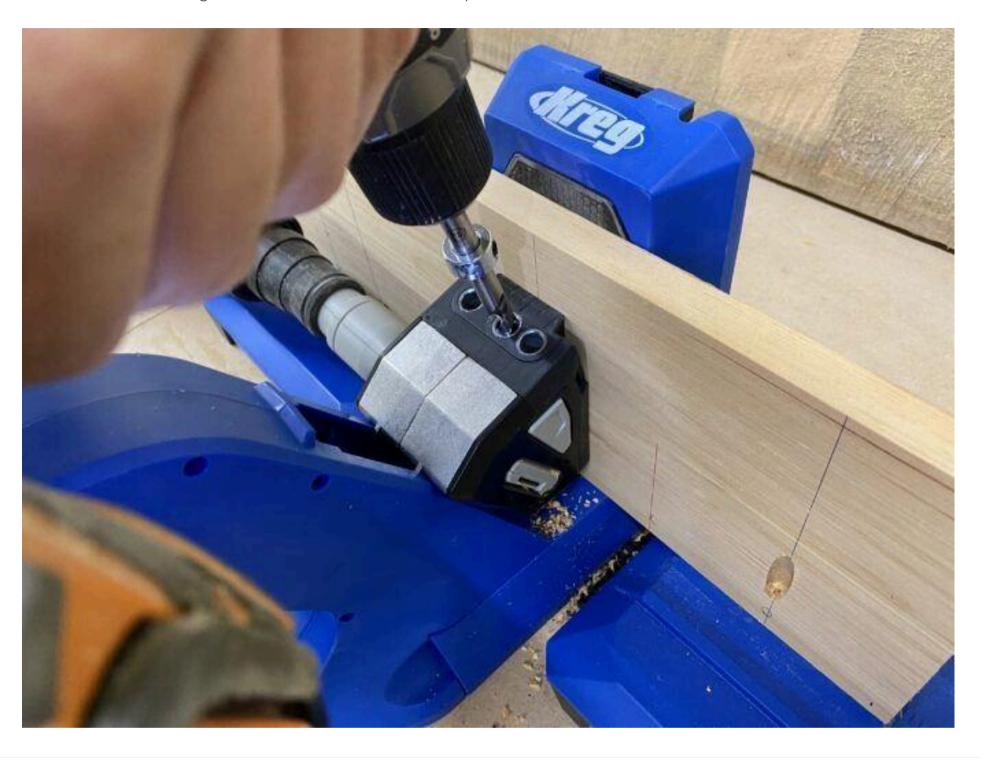



Glue and assemble

We put a layer of wood glue along the sides, and joined these boards together! Repeat this process so that you have two, one for the top and one for the bottom.







Fill holes

Since our lumber was used as floor boards, there were lots of nail holes, knots, and other imperfections that we wanted to fill so we could have a flawless finish when we paint.








Round the corners (optional)


Slice off the edges to make them true with a track saw. We love the look of rounded edges, so we made our own large compass with by drilling into a ruler and drew out our circles on the edge. Then cut with a jigsaw or band saw.

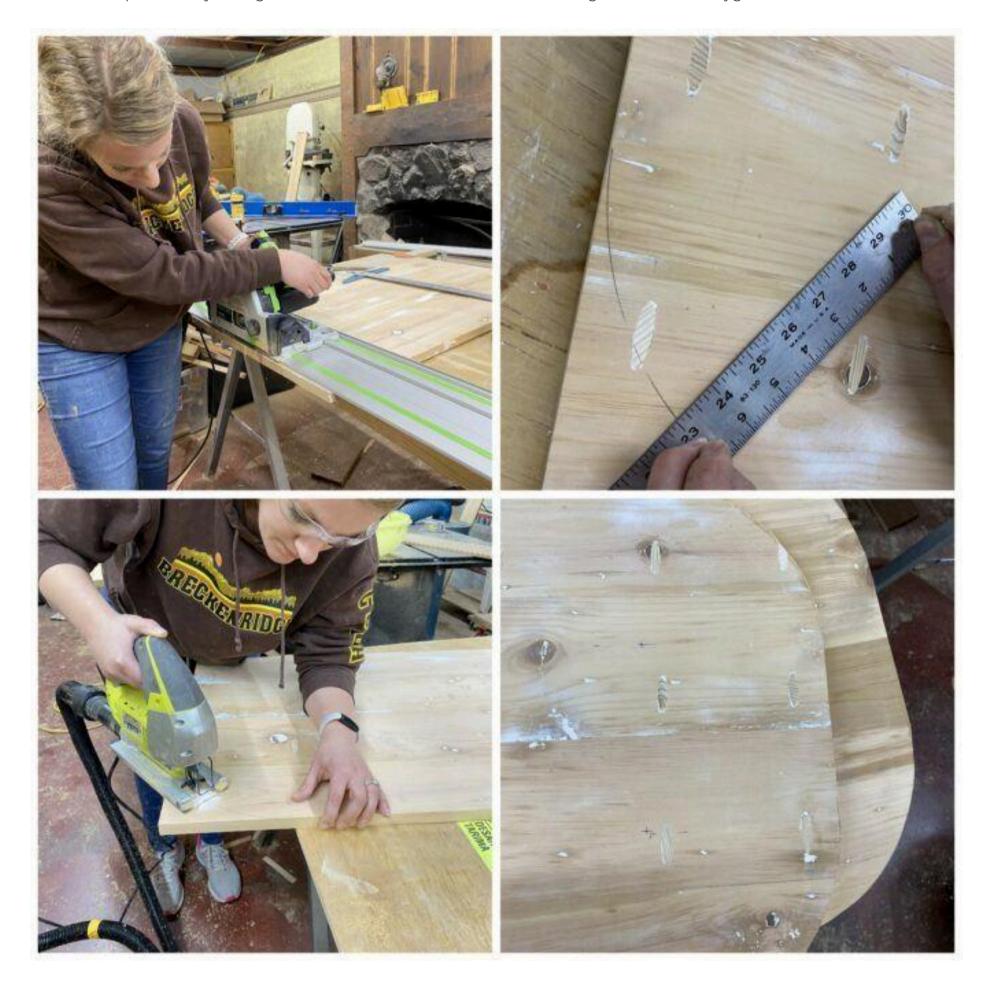



Route the edges

We chose to use a roundover bit and route the edges a bit to soften them up. Then sand everything down.

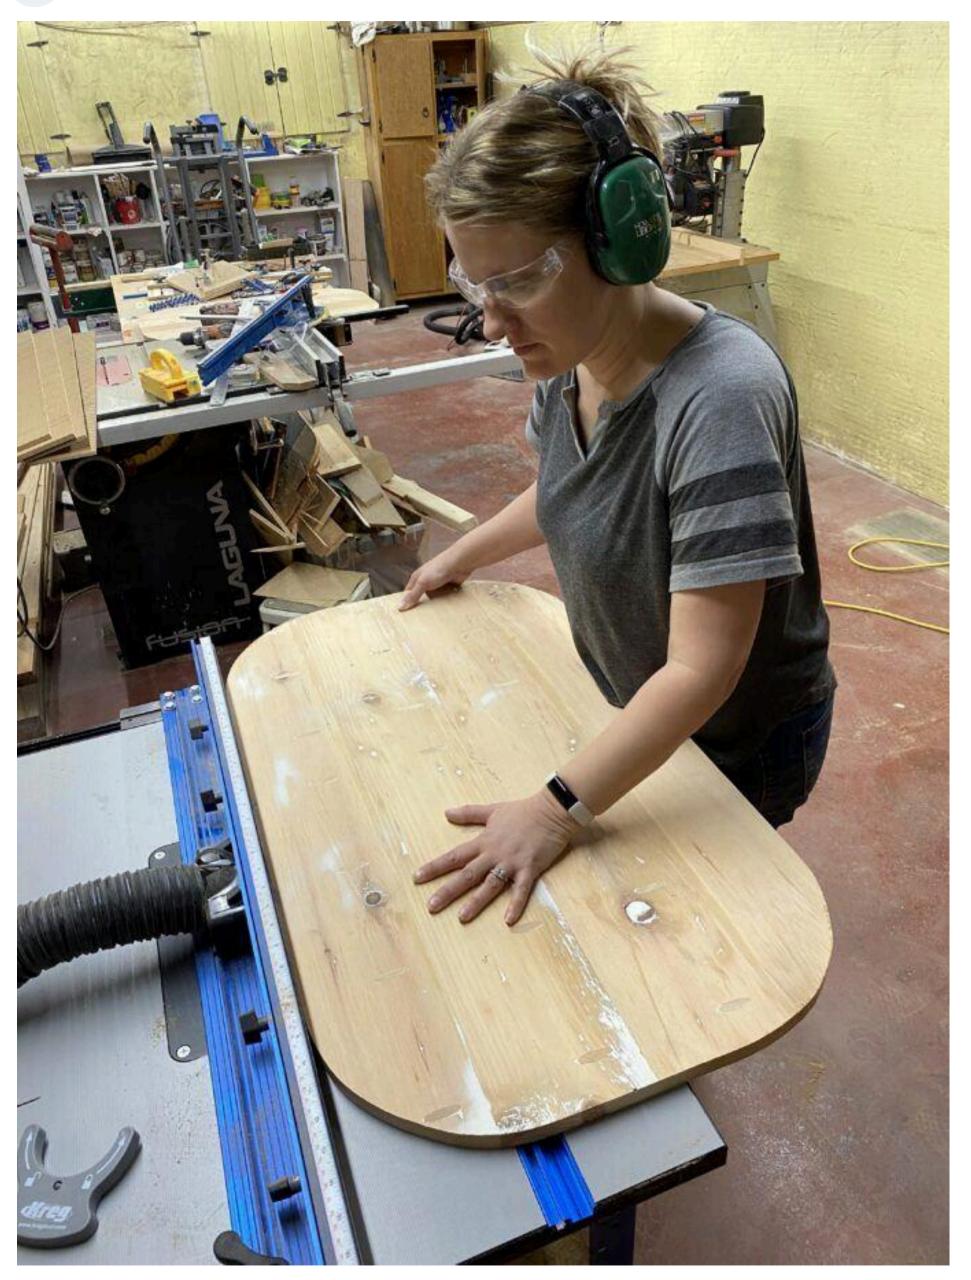





Build the carcass

Nick here... this part was all me. I like our furniture to last a lifetime, so I built this interior framing that would make it more structurally sound. It will also give us something to affix the fluting to (more details about that to come!)

This table was designed to have a 1/2" overhang past the fluted sideboards. We laid out where we wanted the carcass to go by measuring in from the edges. 1/2" overhang 1/2 inch MDF Fluting and 3/4 inch for the supporting carcass.

Once the supporting carcass was laid out we go busy building it, using some scrap 1×6 pieces we cut the supporting tracks 1/2" X 3/4". For the corners we traced the curve onto a piece of 1/2" plywood on the scroll saw.





Page 12 of 26



Add support blocking

We also added blocking $(2" \times 4 \frac{1}{4"})$ to help support the table and the MDF fluting that goes along the outside edges.







Add dividers


While everything was accessible we added the center divider and the divider perpendicular to the center. Note: If using SOSS hinges you will want to route them before installing divider.





Add fluting

There's a trend going around where you place dowels side-by-side on furniture to create a fun texture, or 'fluting'. Instead of cutting a million dowels to size, we decided to try using a sheet of MDF and routing to make the fluting or beading, then attempt to bend it around the corners and affix it to the vertical edges of the coffee table.

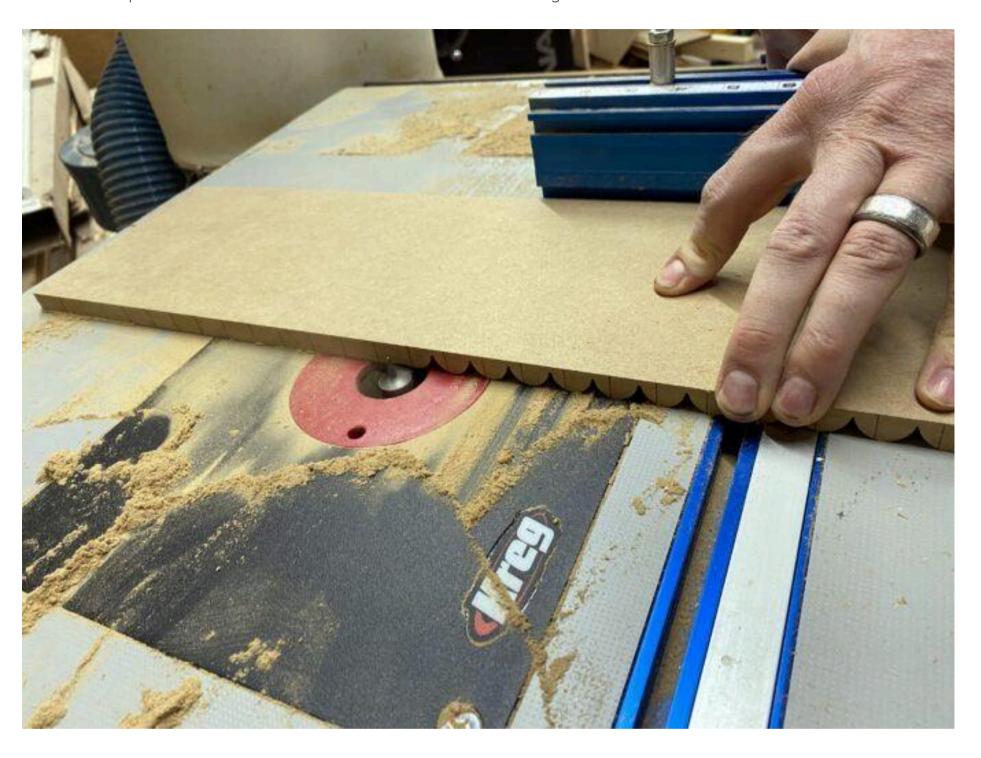





Admire your work

Routing the beads was fun, but very time consuming. In hindsight, we would have just used dowels, but it's totally your choice. You have options!







Bend the MDF

We were hopeful that the MDF would be more flexible after routing, but it was clear we would need to do some kerfing to help with the bending around those corners of the coffee table.

For a 90* angle, you need 12 kerfs, so we used our radial arm saw and got to work! You could also use your table saw for this. After kerfing, these sheets were VERY delicate, so take care!










Glue any cracks

ISN'T THAT SATISFYING?

I'll admit that a few of the beads cracked a little as we made these curves and nailed them in with a pin nailer. We panicked for a second, but it really didn't look too bad. We filled the fractures with wood glue and sanded them smooth, and you'd never know they're there!!



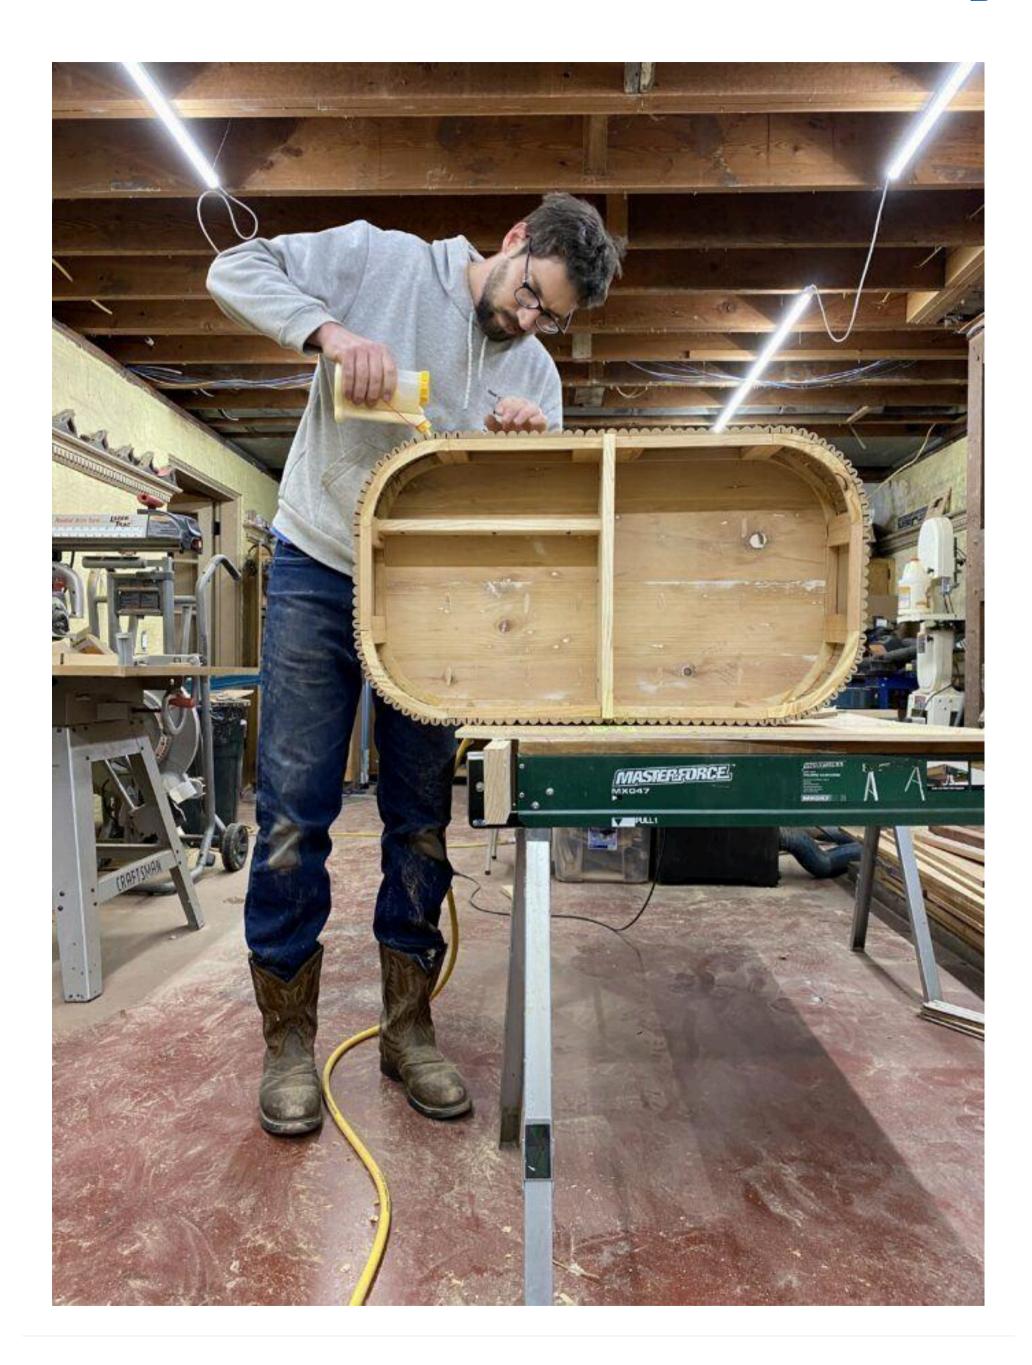





Install lids


Now it's time to slice that board in half to be your two 'lids'. Keep in mind that you want to subtract the thickness of that center divider.





Install hinges

Install your hinges, according to the instructions. You could also just use piano hinges for this coffee table, but you'll have a little visible bump where both of the hinges are on the top surface.

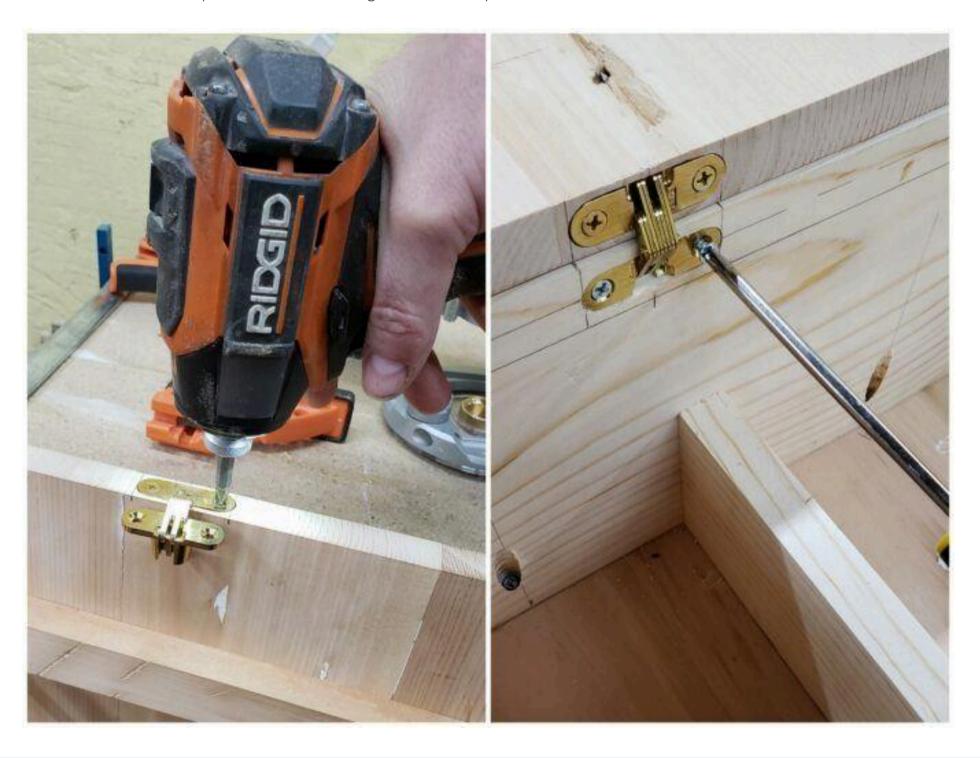





Add Lego plates

We ordered four 10' square Lego plates for this project. Since we wanted the Lego plates to follow the same curve as the tabletop, we marked the sizing we needed to cut the straight sides first.

(Tip: make sure you connect the Lego plates together to confirm they have the right spacing between each other.)








Cut Lego plates

We used the table saw to cut the straight lines.



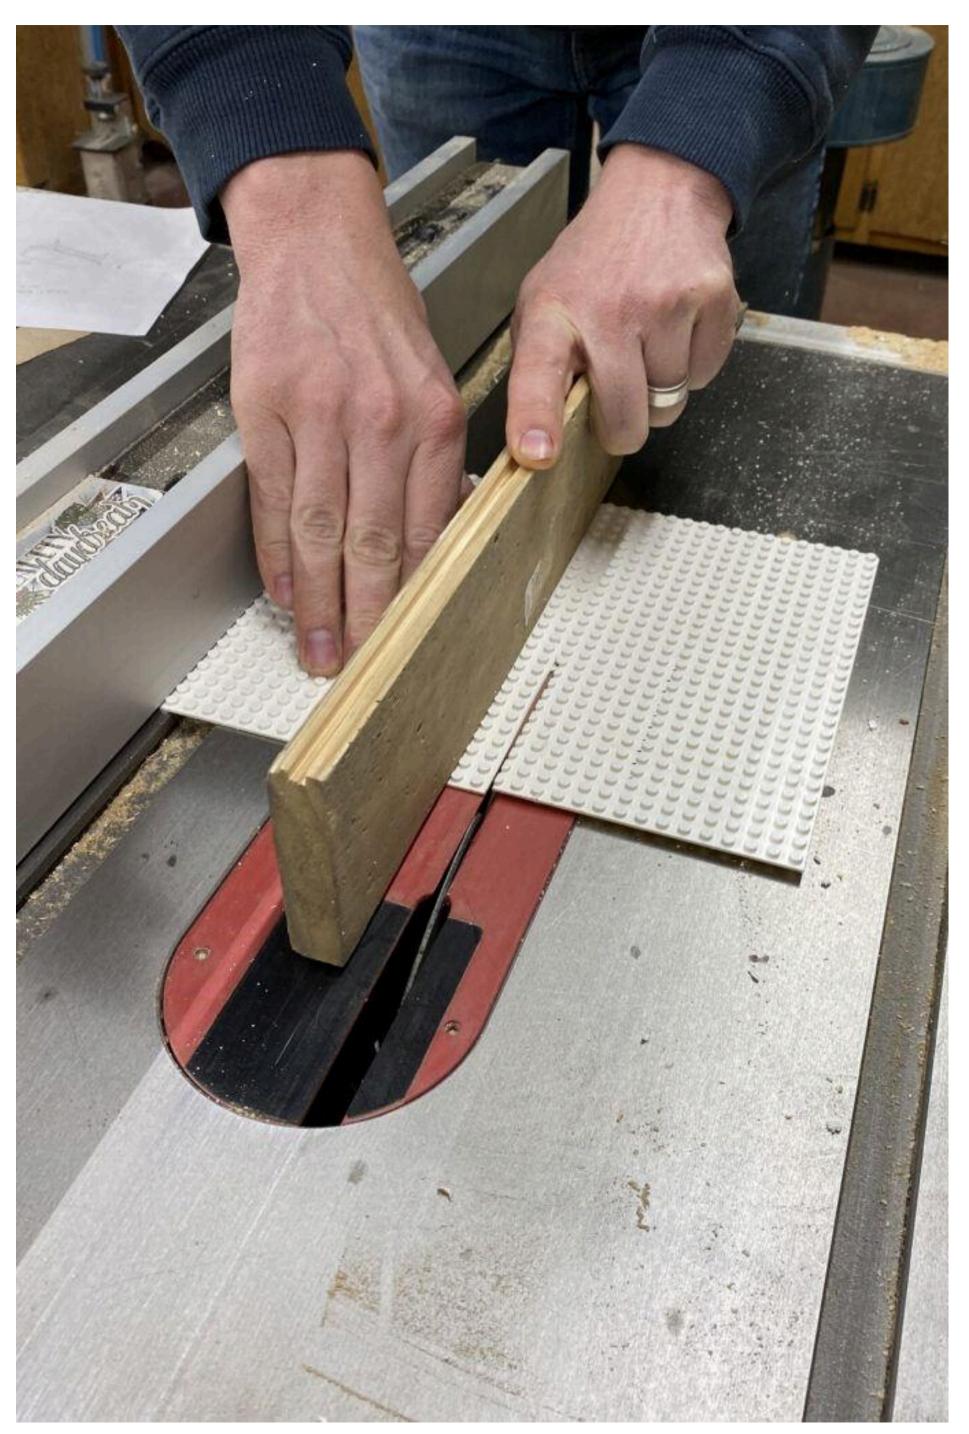

Page 24 of 26






Cut Lego plates (curves) & glue down

Then, using a compass, we marked on the Lego plates where the curves should be, and cut with a band saw.

I painted the inside of the coffee table lids and let it dry completely before gluing down the Lego plates. We used Gorilla Glue for this.

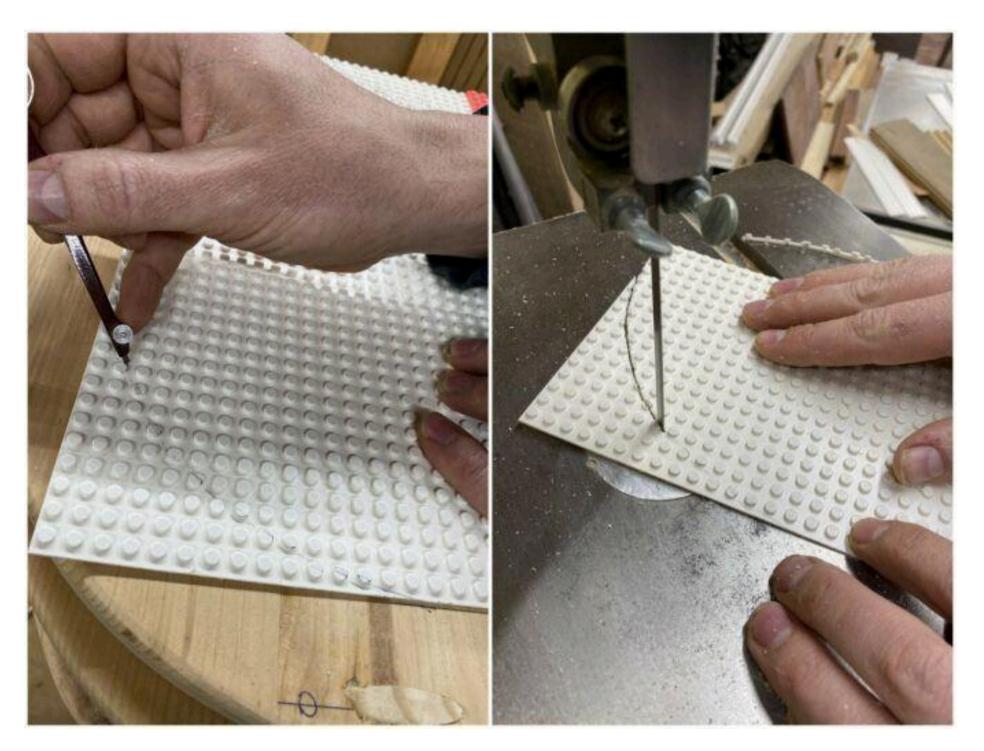



Install Legs

We used 12" tapered furniture legs, and installed them using the angled brackets.





Paint!

The whole table got a couple coats of matte white spray paint. It's important to use an oil-based paint... even if you're not using spray paint. The reason for this is because MDF will become fuzzy due to the water in the paint.

We did a couple light coats until it had great coverage, and we're ready to load 'er up with Legos and remotes!;)

