

DIY Dog Bed Frame – How To Make a Dog Bed

Difficulty
Easy

Our furry family members deserves a cozy spot to curl up and rest. A pet bed doesn't have to be unsightly, but can be an accent in our home. Let's build them this versatile custom bed that is sure to please our beloved pets and will add fun and function to our decor.



prodigal
PIECES
what was lost now is found

Tools

Kreg Tools

Kreg®
Pocket-
Hole Jig
720

[Kreg® Pocket-Hole Jig 720](#)

Other Tools

- Jigsaw
- Miter Saw
- Square
- Table Saw
- Tape Measure
- Drill (cordless)
- Sander
- Workbench

Materials

Wood Products



- 1 Plywood , 3/4" Thick , Quarter Sheet
- 1 Board , 1x4 , 120"
- 1 Board , 2x4 , 16"
- 1 Board , 1x4 , 96"

Hardware & Supplies

- 4 Felt Furniture Feet
- 42 1 1/4" Kreg Maxi Lock Coarse Screws
- 2 Trunk Handles (Optional)

Cut List & Parts

- 1 Pet Bed Base , 30" X 24"
- 4 Bed Posts , 8" X 1 3/4" X 1 1/2"
- 3 Long Side Rails , 31 1/2" X 4" X 1"
- 4 Short Side Rails , 24" X 4" X 1"

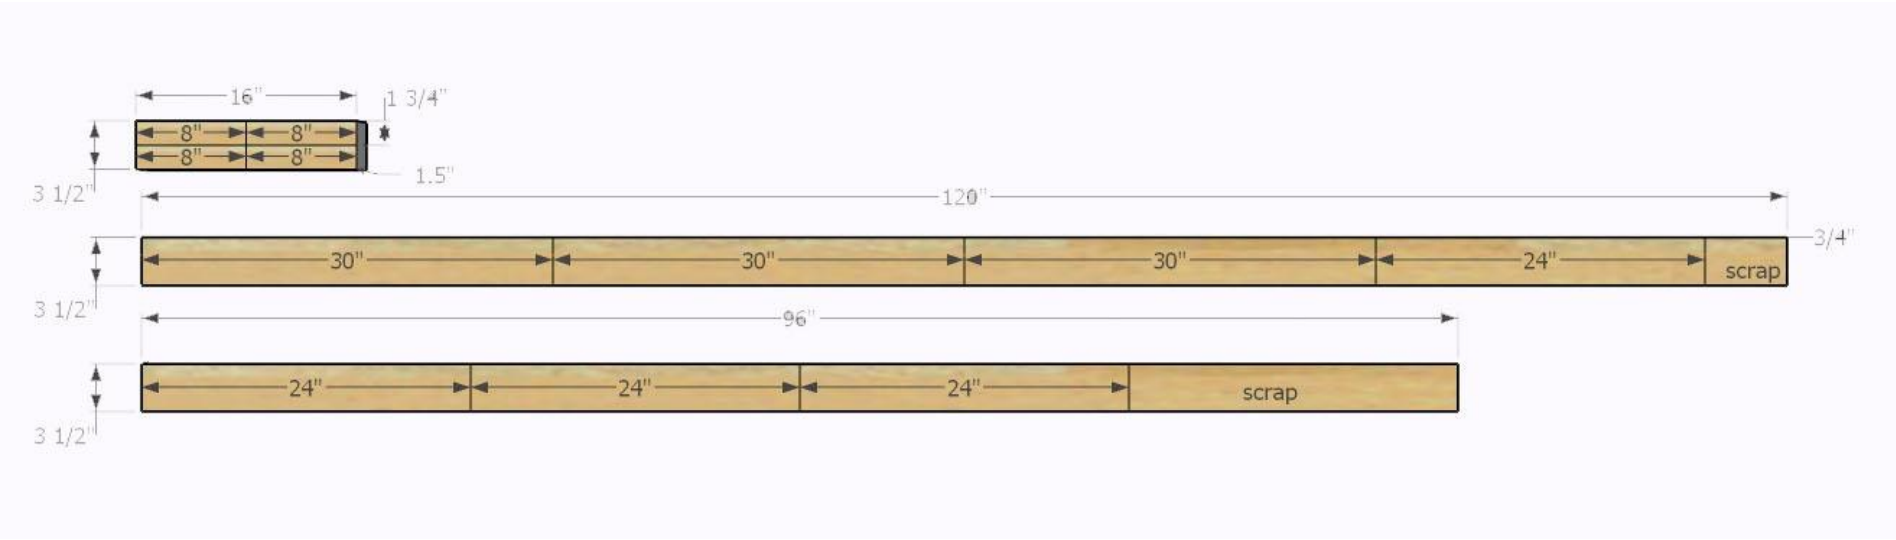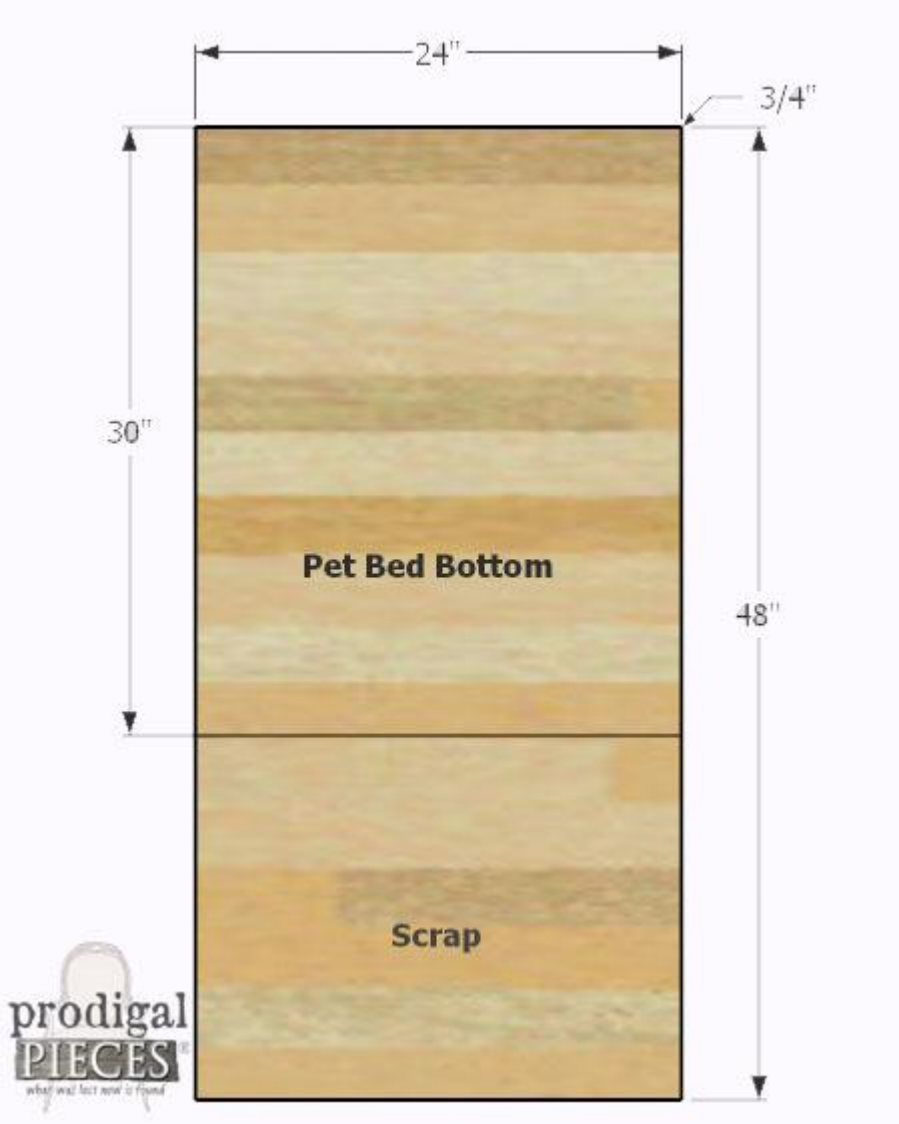

Directions

1


Step 1. Cut dog bed parts

Using the provided cut list and diagrams, cut the wood for your pet bed and sand smooth with a 120-150 grit sandpaper.

2


Step 2. Prepare dog bed base

Drill pocket screw holes on backside of bed base for 3/4" material following the diagram. See next step for a tip.

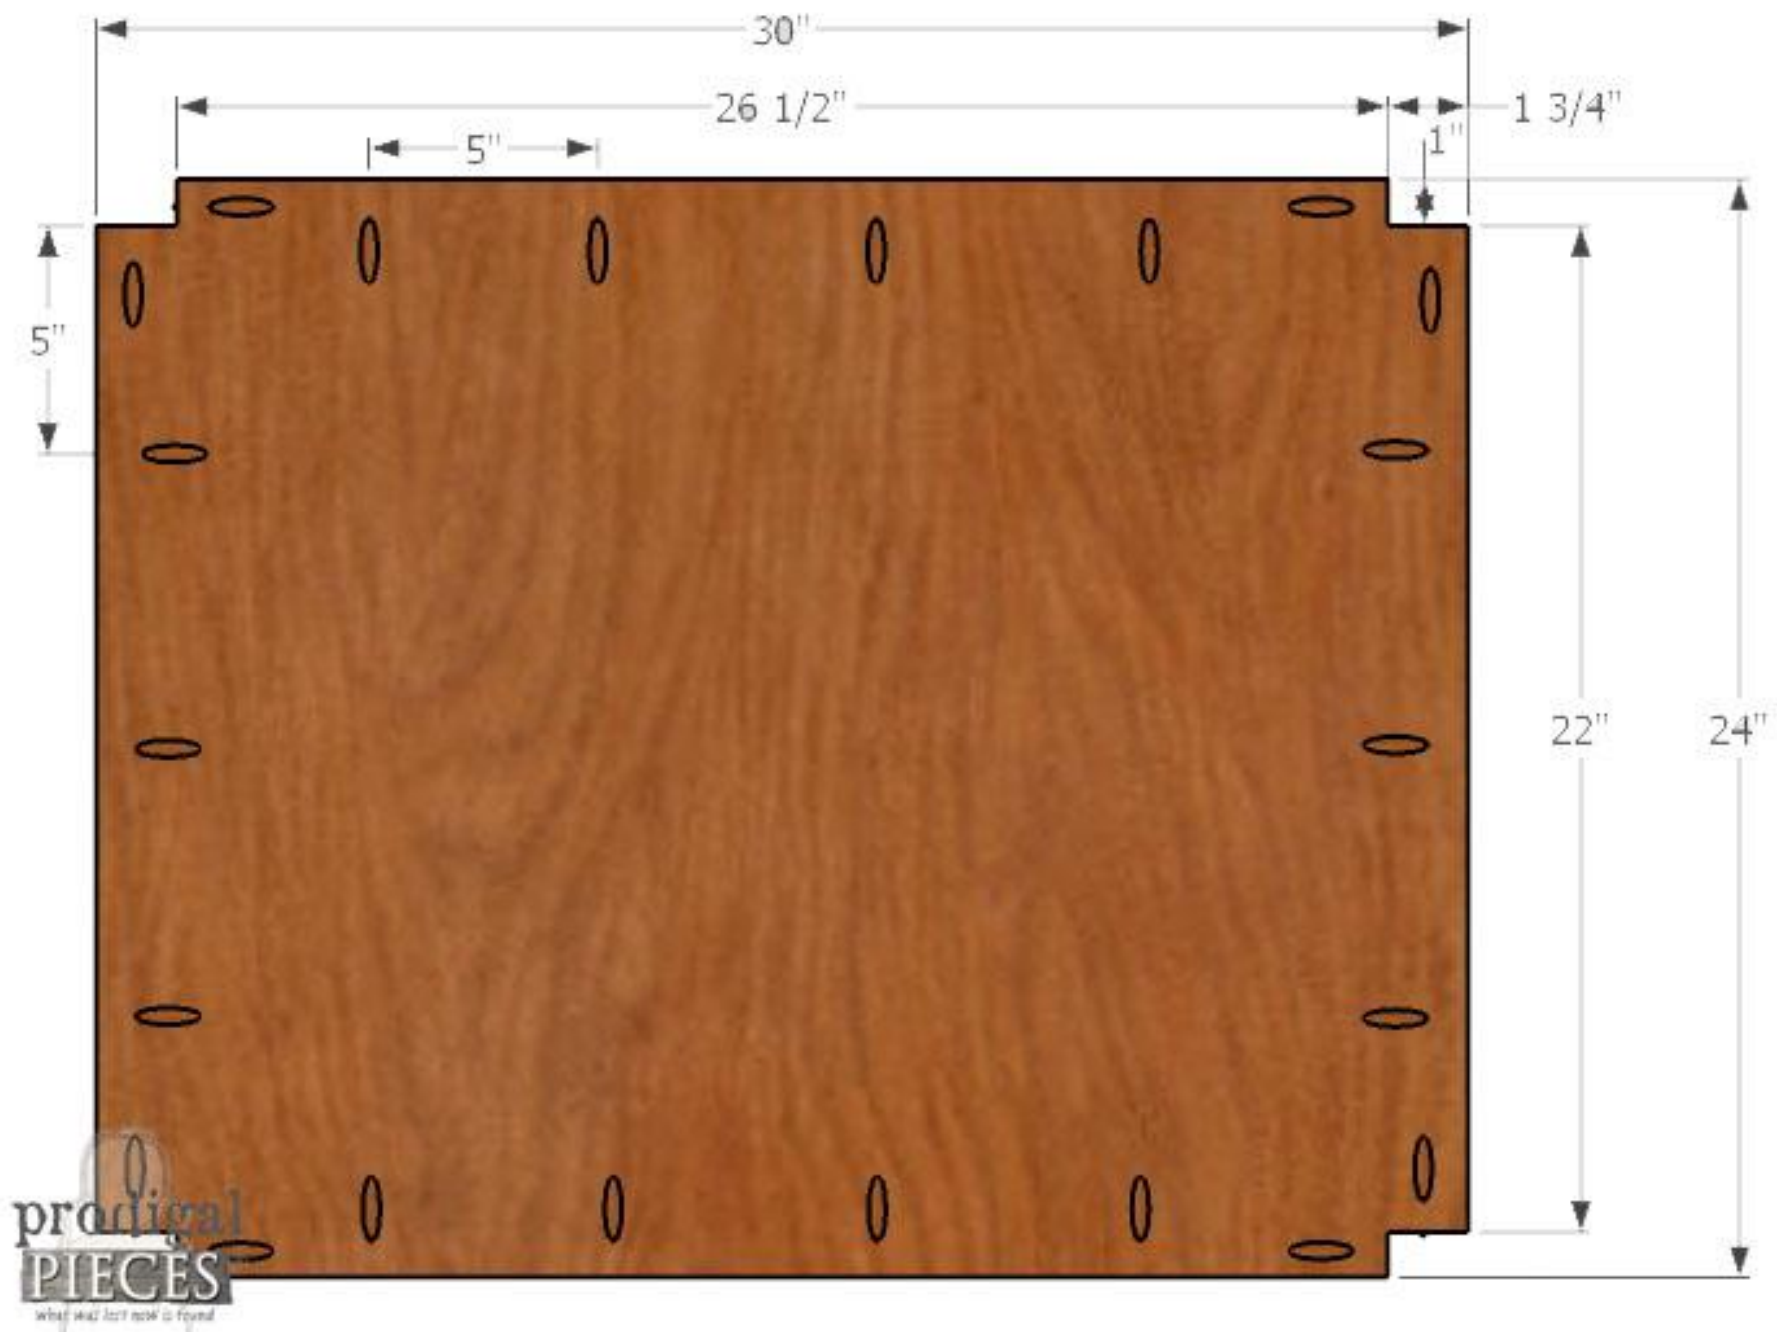

3**Step 3. Trace and cut**

Take one of your 8" corner posts and place the end flush to each corner with the 1 3/4" face facing in and trace. Cut out corners with jigsaw.

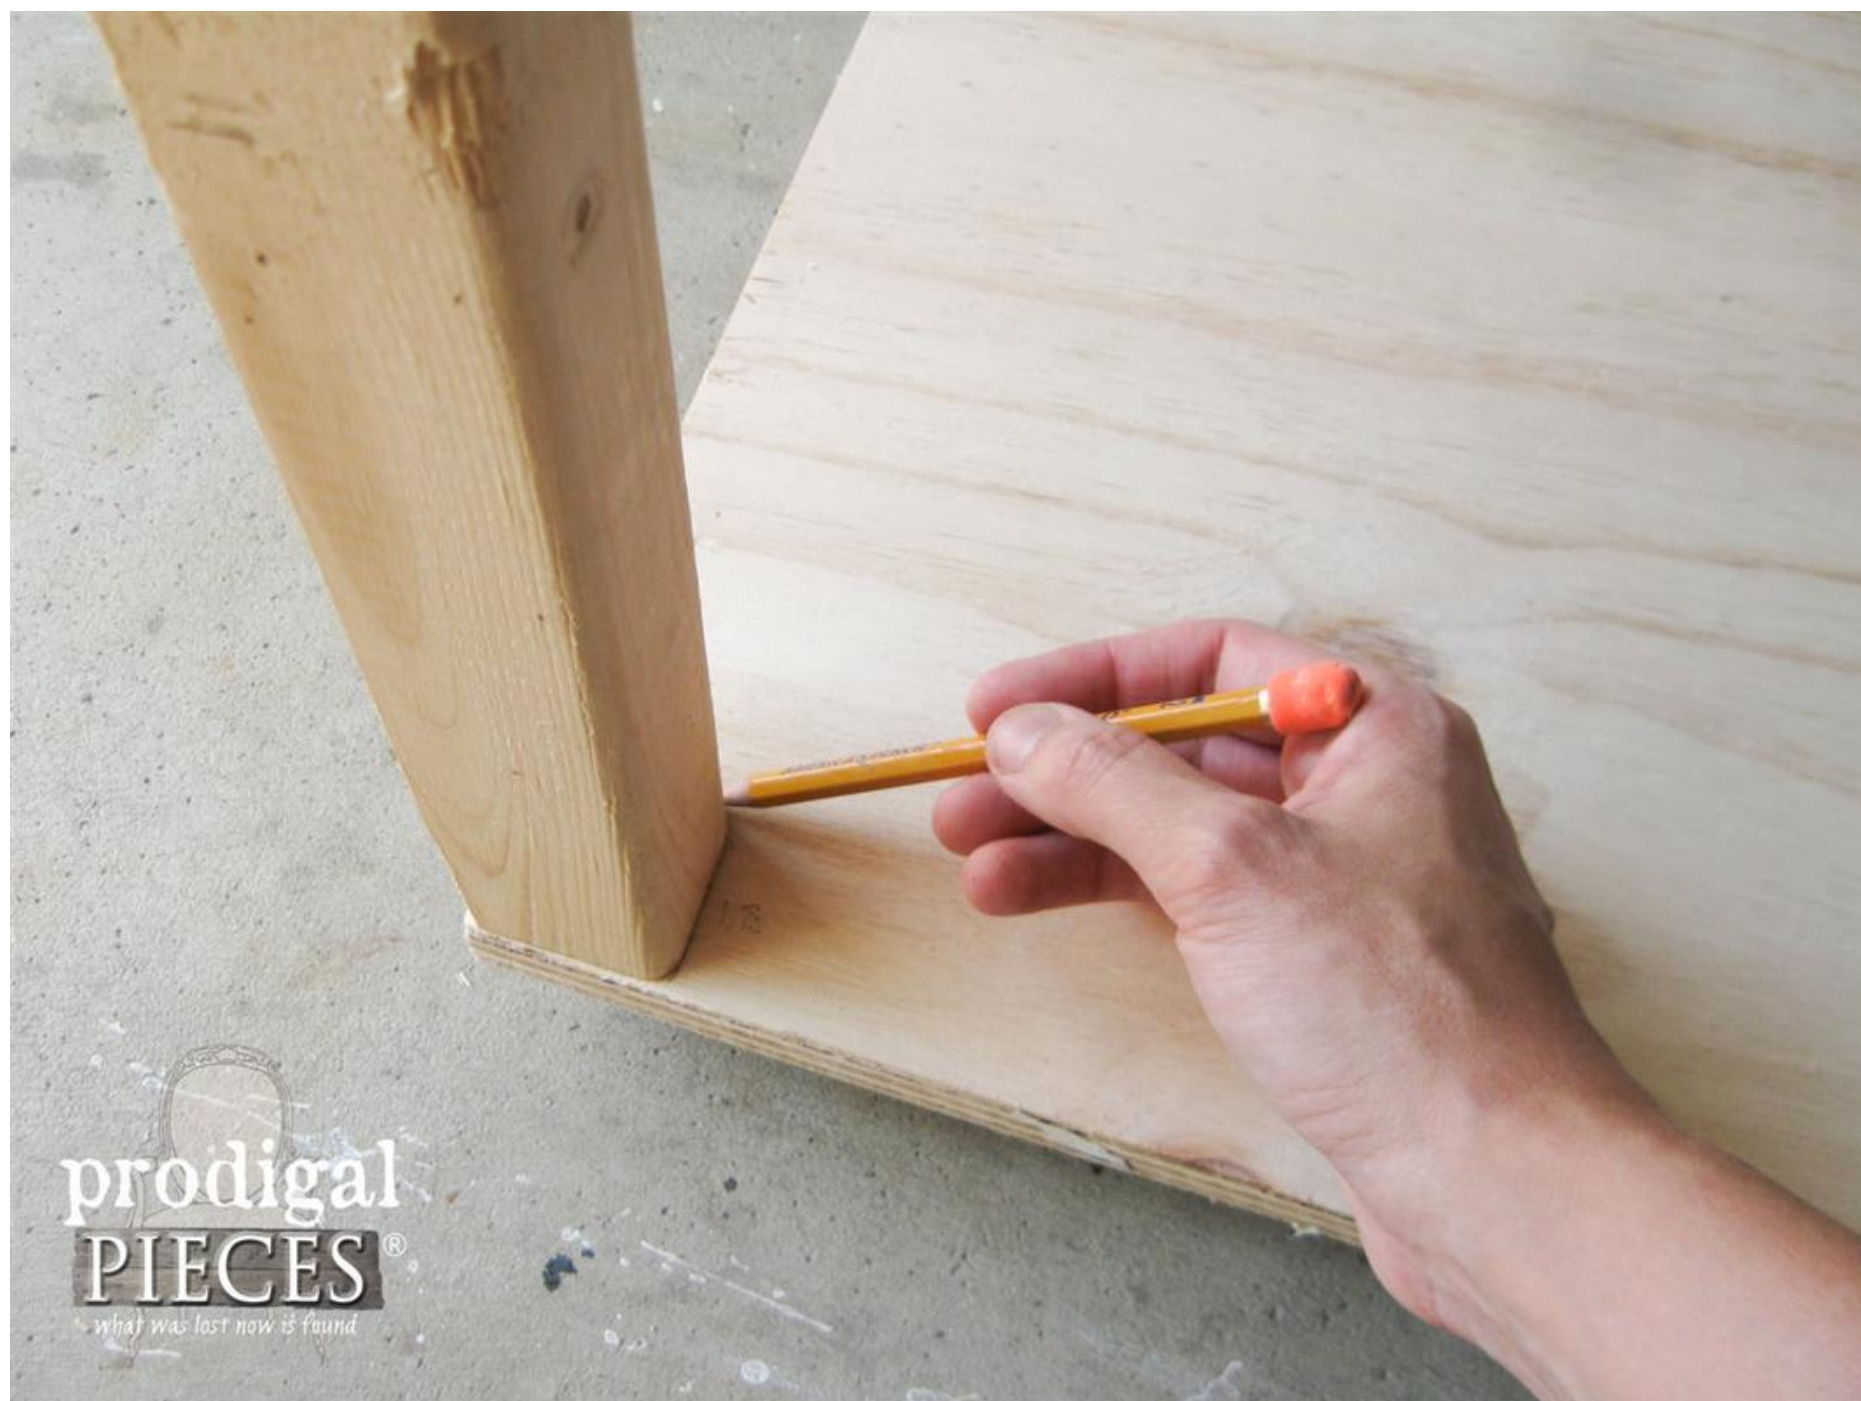

4

Tip for pocket holes


Since the bed base corners need pocket screw holes that can be tricky, mount your Kreg jig to the corner of your worktable and rest the base as shown.



5

Step 4. Mark side rails

Find center of your side rails, and then mark for a 3/4" thick bed base lengthwise by measuring at 1 3/8" and 2 1/8" from a long edge and mark. Follow diagram.

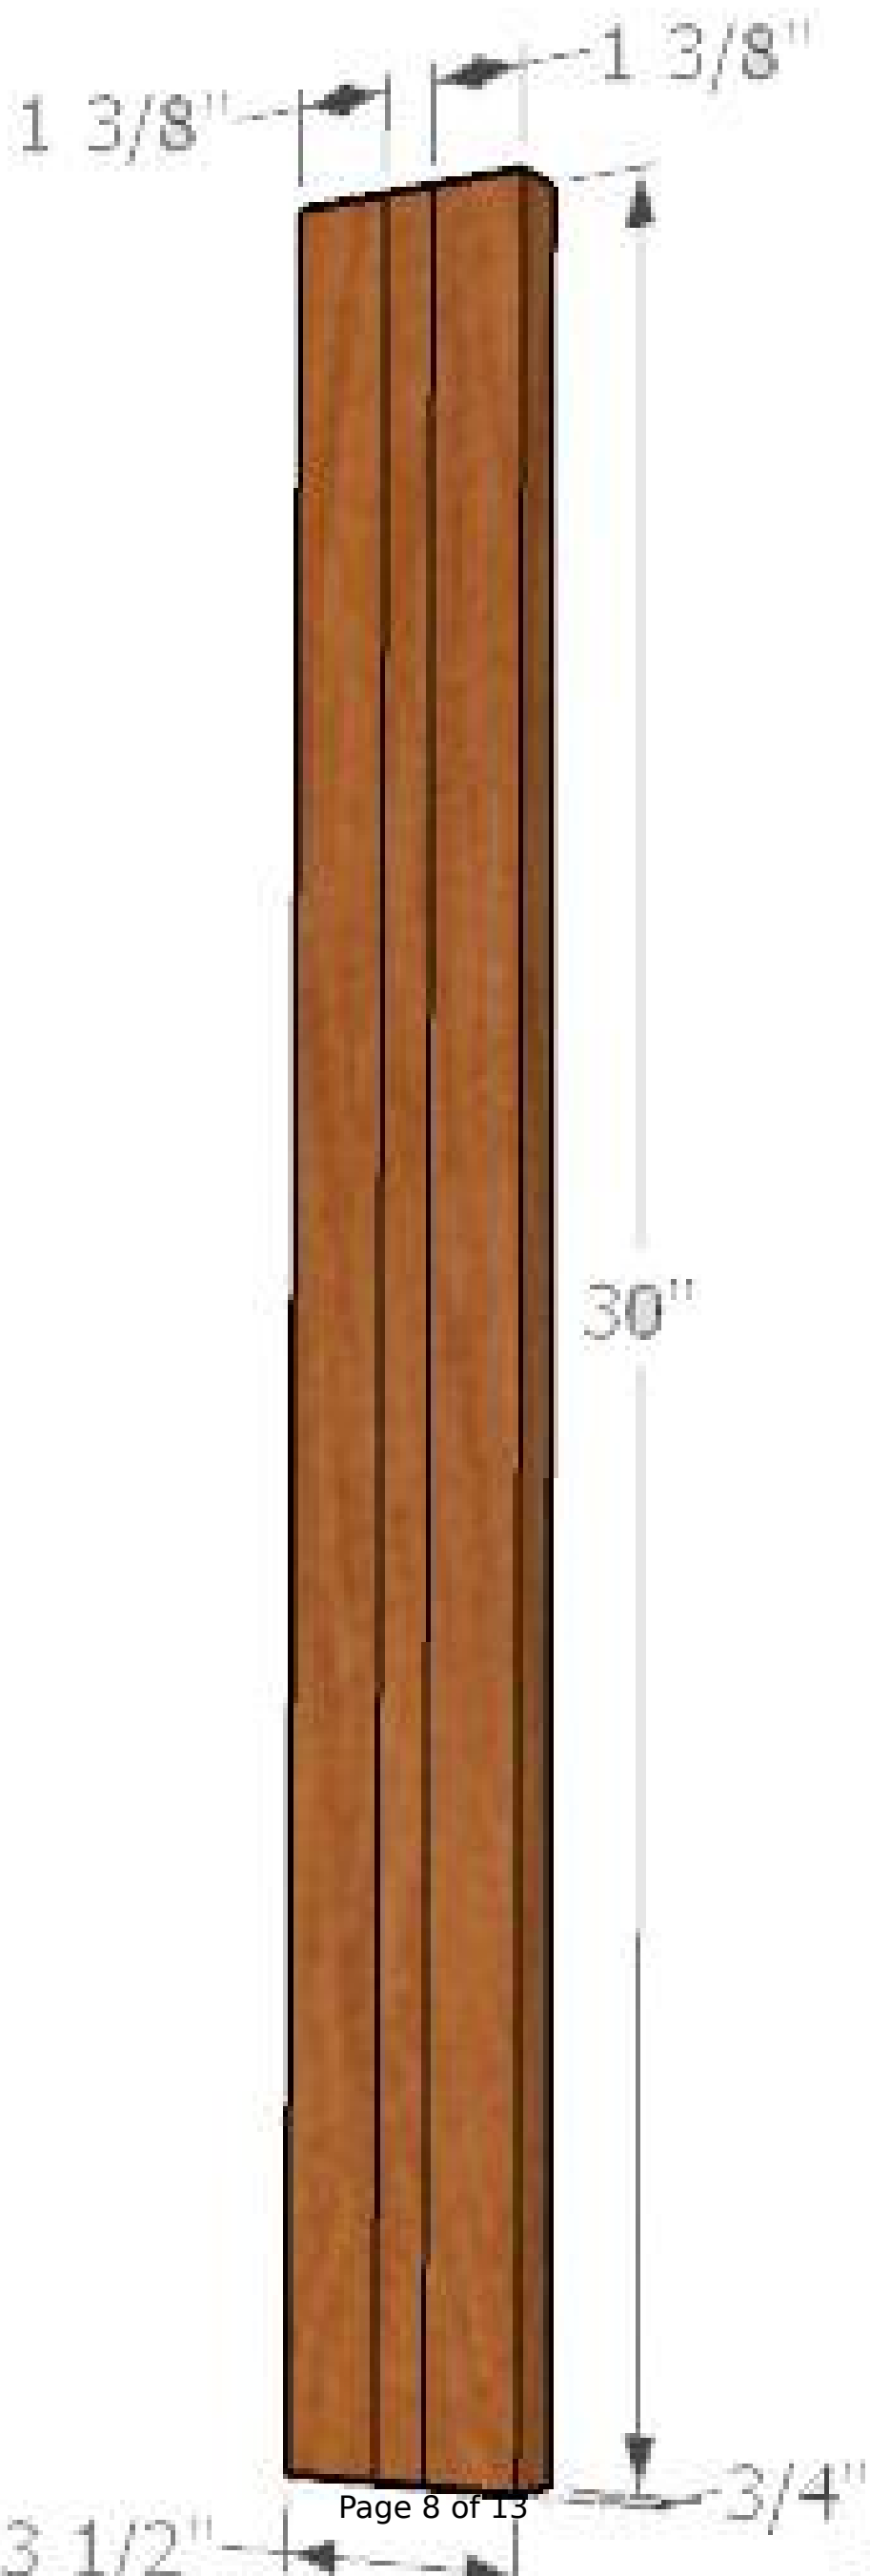


6**Step 5. Attach side rails**

Attach your side rails using wood glue and 1" wood screws. By laying your bed base on the table and extending over the edge makes it easy to attach the rails. See photo.



7**Step 6. Attach corner posts**

Insert your 8" posts into the corner openings so that they are flush to the bottom edge of the bottom rails. Attach using wood glue and wood screws in the corner pocket hole openings. Pre-drill holes through the side rails into the posts and attach with wood screws.

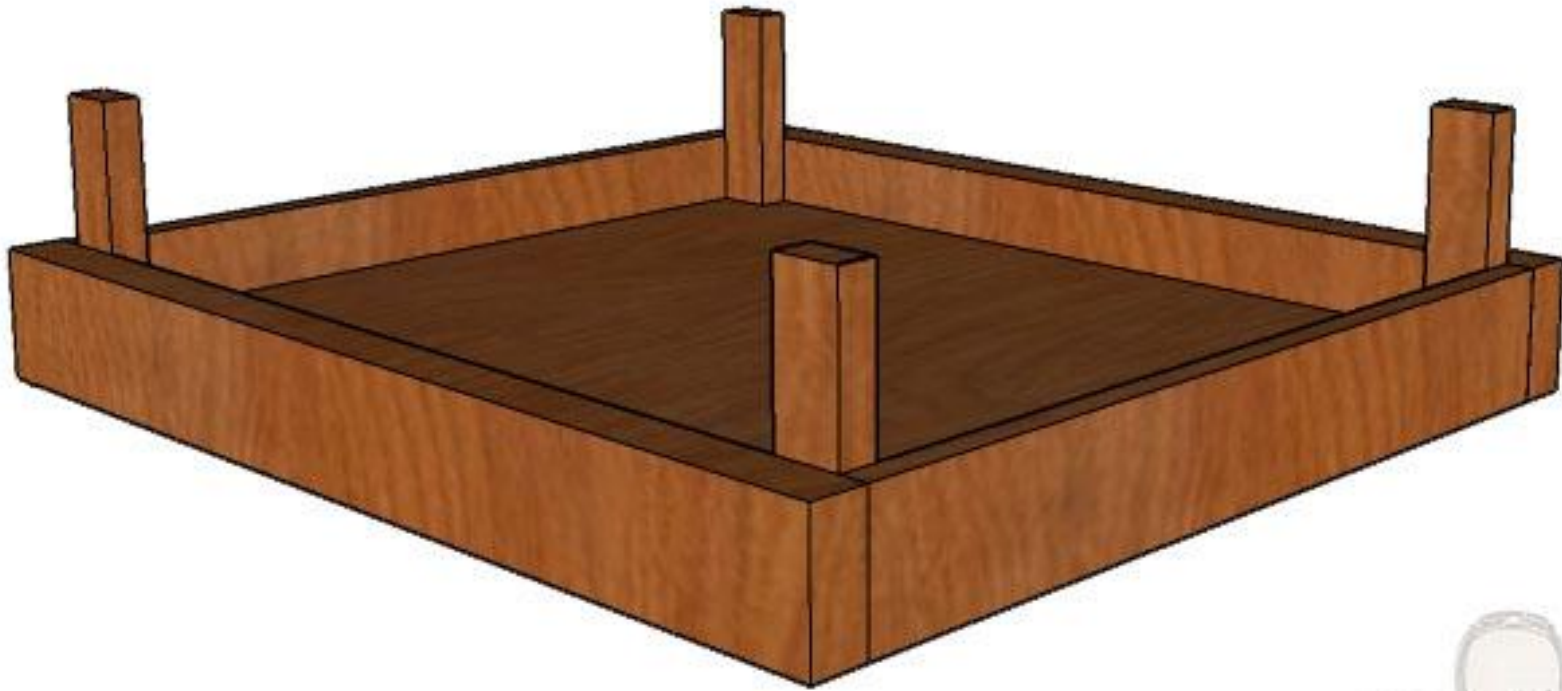

8**Step 7. Attach top rails**

Pre-drill holes into your top rails and attach flush to the top of your corner post with wood screws. Use a scrap 1" x 4" in between the top and bottom rails to help space the board while drilling and screwing. The 24" rails are flush to the front posts, and the 30" rail extends over the ends of the 24" rails as shown.



9**Step 8. Finish your dog bed**

Stain or paint your pet bed. Once dry, add felt furniture feet to protect your floor. Also, add a couple of trunk handles on the short sides for mobility and ease of cleaning. Want to know how to create the cushion? Just head to the "Extras" tab to get the tutorial.

Enjoy! Because your pet will love you for this treat.



10**Before you cut**

This plan is suited to a small to medium size dog or cat, but it can easily be altered to suit your favorite pet cushion and pet size. This design was based on using two bed pillows inside a custom pillow case. Feel free to alter the dimensions to suit any size pet bed.

