


Golf Ball Display Case

By **The Creative Mom**

Difficulty

Easy

This golf ball display case is the perfect handmade gift! It measures 18 1/2" x 15 1/2" and has room to display 35 golf balls. This is a beginner build, although it does require a little bit of precision. It is something you could easily tackle in a weekend.

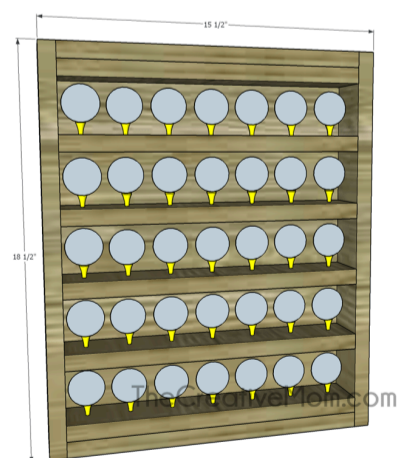

Tools

Kreg Tools



[Kreg® Pocket-Hole Jig 720](#)



[Shelf Pin Jig with 1/4\"](#)

Other Tools

Miter Saw

Drill (cordless)

Drill Press

Nail Gun

Sander

Tape Measure

Materials

Wood Products

2 Board , 1x3 , 96"

1 Plywood , 1/4" Thick , Quarter Sheet

Hardware & Supplies

35 1 1/4" Pocket Hole Screws

50 1 1/2" Brad Nails

35 Standard Golf Tees

Cut List & Parts


- 3 Horizontal Frame Pieces , 14" 1x3's
- 5 Horizontal Shelves , 14" 1x3's
- 2 Vertical Frame Pieces , 18 1/2" 1x3's

Directions

1

Build Frame

Cut 2- 14" 1x3 boards. Drill pocket holes in each end of both boards. Cut 2- 18 1/2" 1x3 boards. Secure the 14" boards to the 18 1/2" boards with 1 1/4" pocket hole screws and wood glue to make a frame.

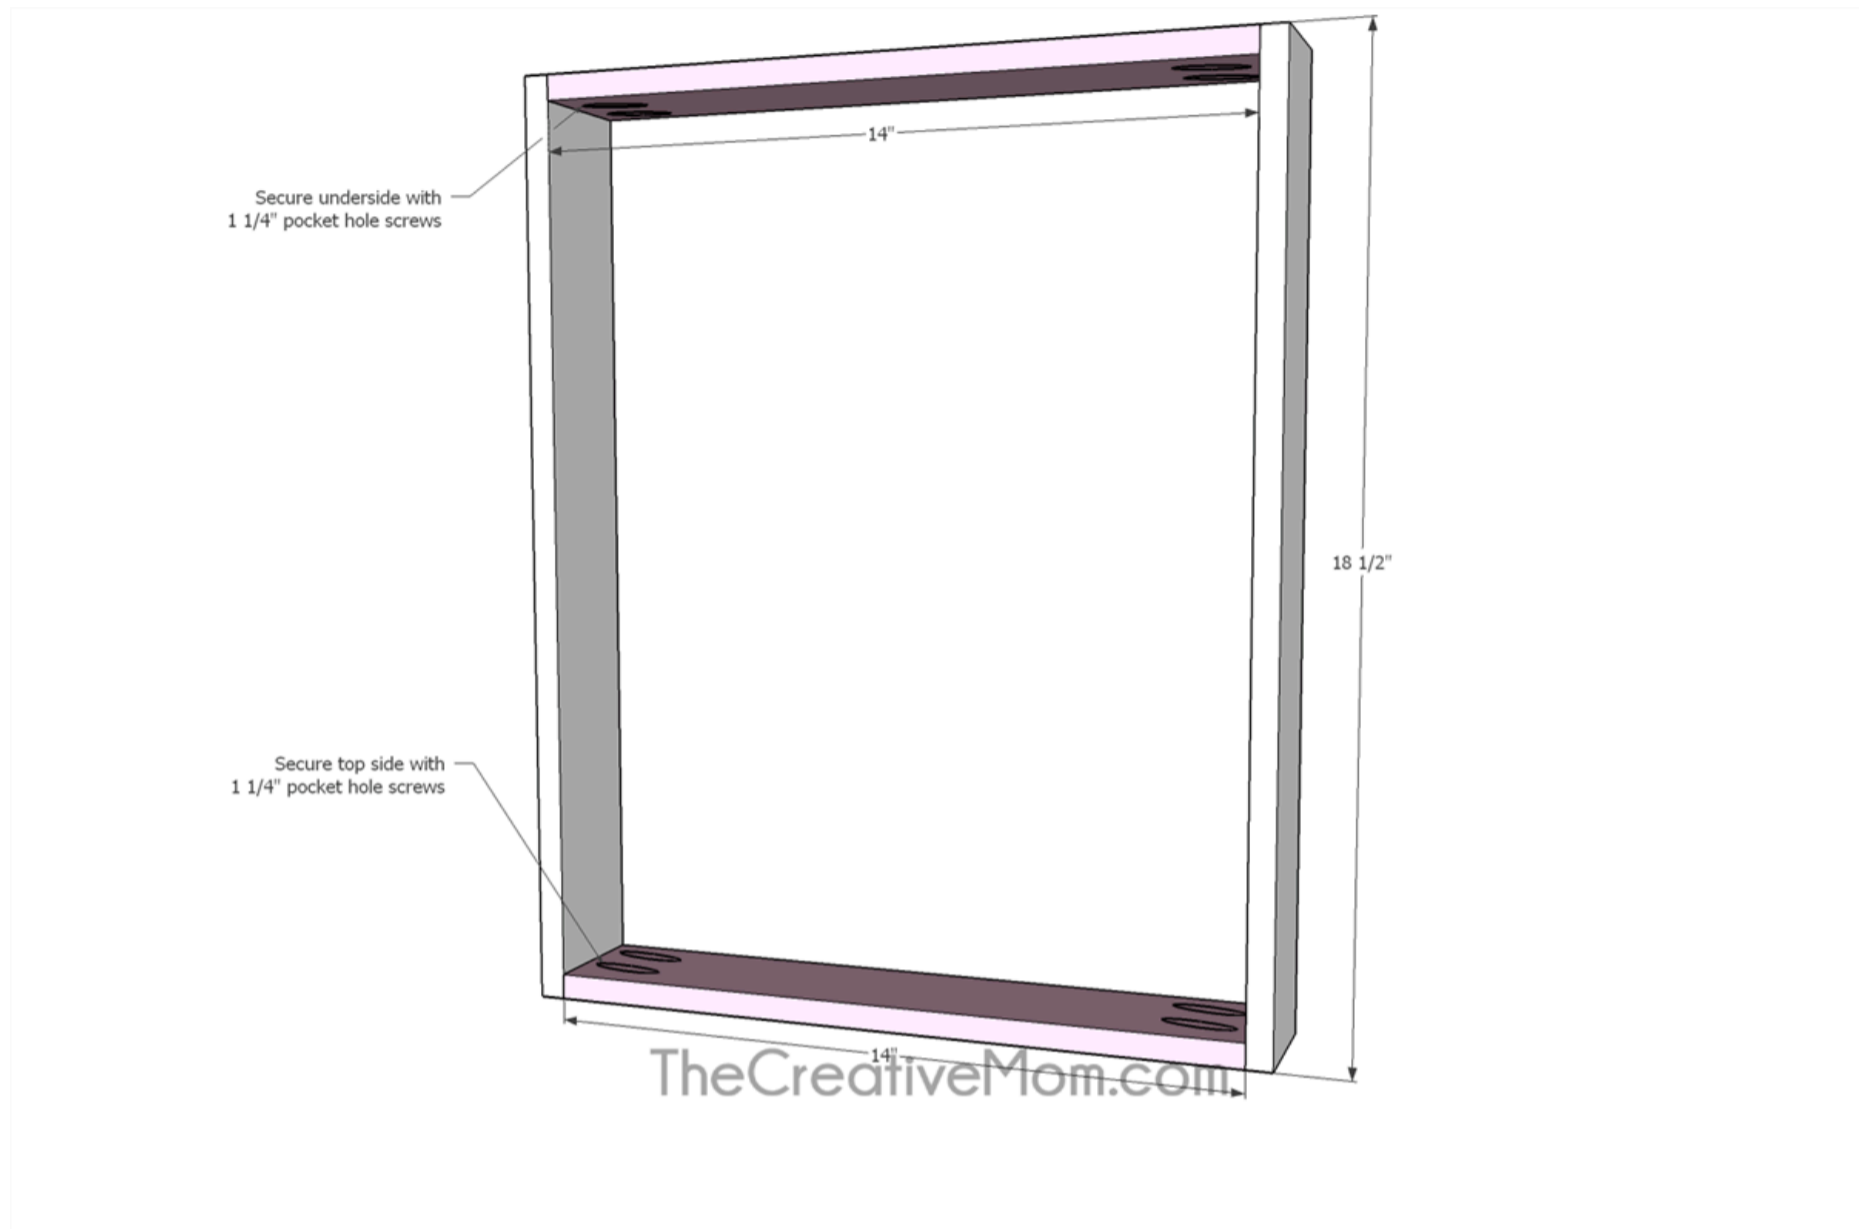


2

Add top board

Add 1- 14" 1x3 to the underside of the top board with wood glue and either 1 1/4" pocket hole screws or 1 1/2" brad nails.

Add 1- 14" 1x3 to the top with wood glue and either pocket hole screws or brad nails

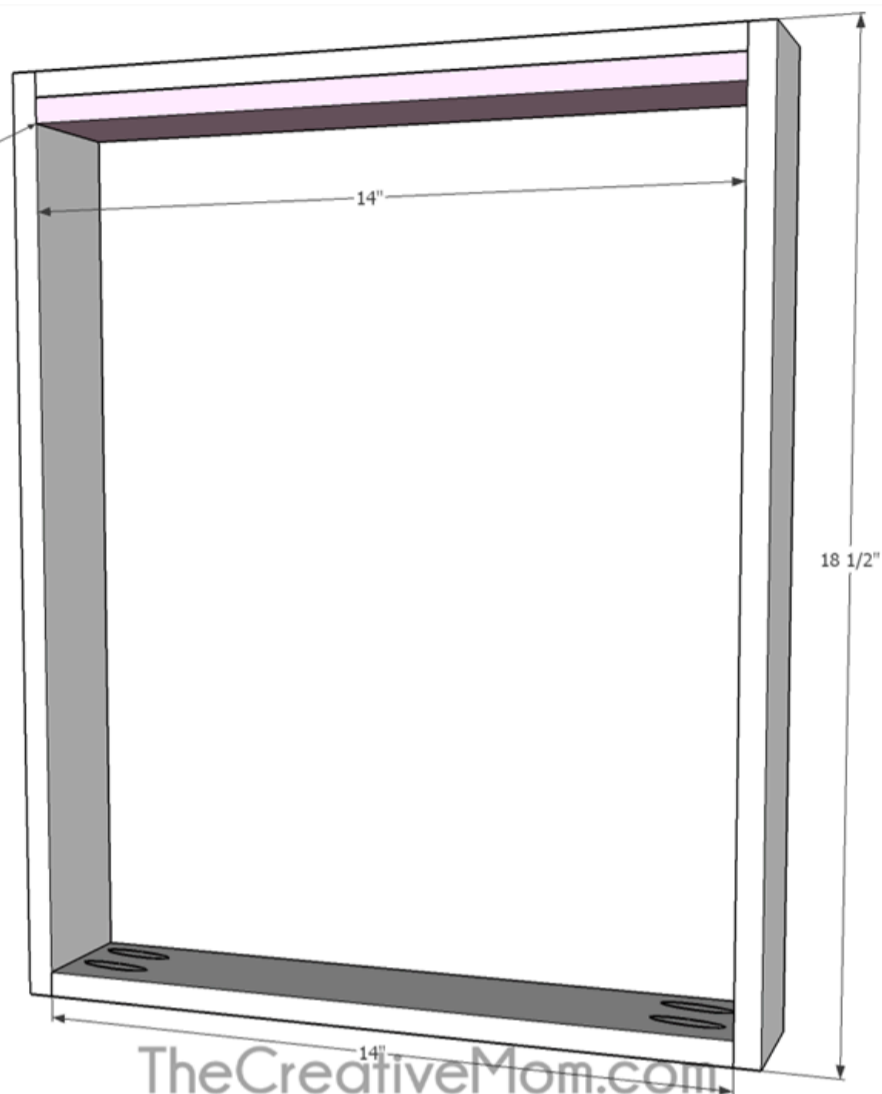

3

Drill tee holes in shelf boards

Cut 5- 14" 1x3's. Using a 7/32" drill bit, drill a hole in the center of the board, then drill every 2 inches, working your way outward toward the ends of the board. See diagram.

Please note: You may want to test drill bit sizes, based on the size of your tees. We found that 7/32" worked well for a standard golf tee.


The Kreg shelf pin jig would work to help you keep your spacing, and make sure you drilled straight holes.

14" - 1x3 boards.

Cut and drill 5 of these boards.

Drill holes using 7/32" drill bit.
(You may want to test drill bit sizes, based on the size of your tees)

Only drill halfway through the board.

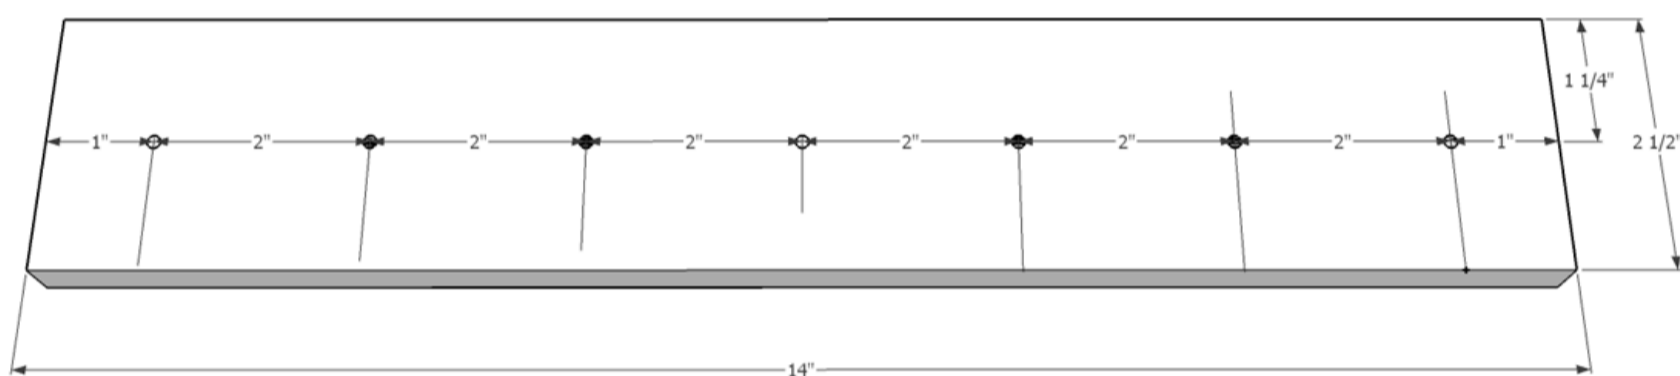


TheCreativeMom.com

4

Attach Shelves

Attach the horizontal shelves to the vertical frame pieces using wood glue and either 1 1/4" pocket hole screws or 1 1/2" brad nails. Leave 2 1/2" between each shelf.

Hint: Use a scrap 1x3 piece as a jig to keep your shelves spaced evenly.

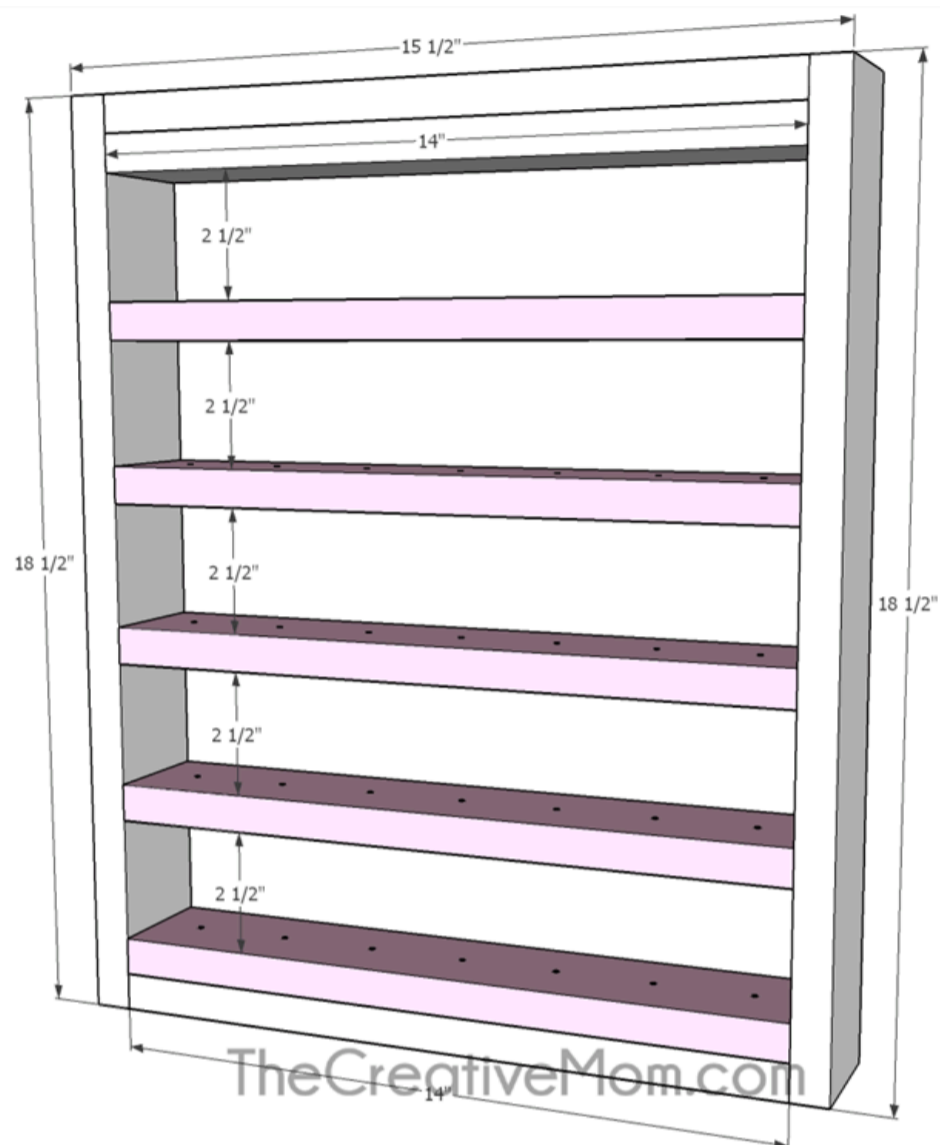

5

Finish Shelf

Add decorative trim, if desired. Fill holes, sand, and either stain or paint your shelves.

6**Add Golf Tees**

Cut your tees down to 3/4". We built a little jig so we could cut a lot of tees at once, and make sure they were all cut evenly. Once the tees are cut, dip them in a little wood glue and secure them into the holes on your shelves.



7**Add Backing**

This step is optional. If you want backing on your shelf, cut a piece of 1/4" plywood, and secure it to the back with wood glue and brad nails.

The backing is optional.

