

Modular Mug Rack

By Sawdust 2 Stitches

Difficulty

Easy

A great compromise of form and function. This Pottery Barn inspired hanging mug rack is part of a modular set that can be used in combination with other modular pieces (see image 2), or it can be used alone!







Page 1 of 8



Materials

Wood Products

- 2 Board , 1x6 , 96"
- 1 Board , 1x2 , 96"
- 2 Dowel Rod , 1/2" Thick , 36"

Hardware & Supplies

- 9 "S" Hooks
- **5** Label Holders (If Desired)
- 1 18 Gauge Finish Nails
- 1 Wood Glue

Tools

Other Tools

Miter Saw

Table Saw

Drill (cordless)

Nail Gun

Sander

Page 2 of 8



Cut List & Parts

- 2 Top & Bottom Frame , 3/4" X 6"x 24"
- 2 Side Frame , 3/4" X 6" X 25 1/2"
- 2 Dowel Rod , 1/2" X 24 3/4"
- 1 Bottom Back Support , 3/4" X 4 3/4" X 24"
- **4** Dividers , 3/4" X 4 3/4" X 4 3/4'
- 1 Top Back Support , 3/4" X 1 1/2" X 24"
- 2 Front Rails , 3/4" X 1 1/2" X 25 1/12"

Page 3 of 8




Directions

Frame

1

Apply a small amount of wood glue into the pre-drilled holes for the dowel rods. Fit both dowel rods into their corresponding 1/2" holes. Join both 25 1/2" and 24" 1x6" boards using wood glue and 2 inch, 16 gauge finishing nails. This will form a 25 1/2" square.

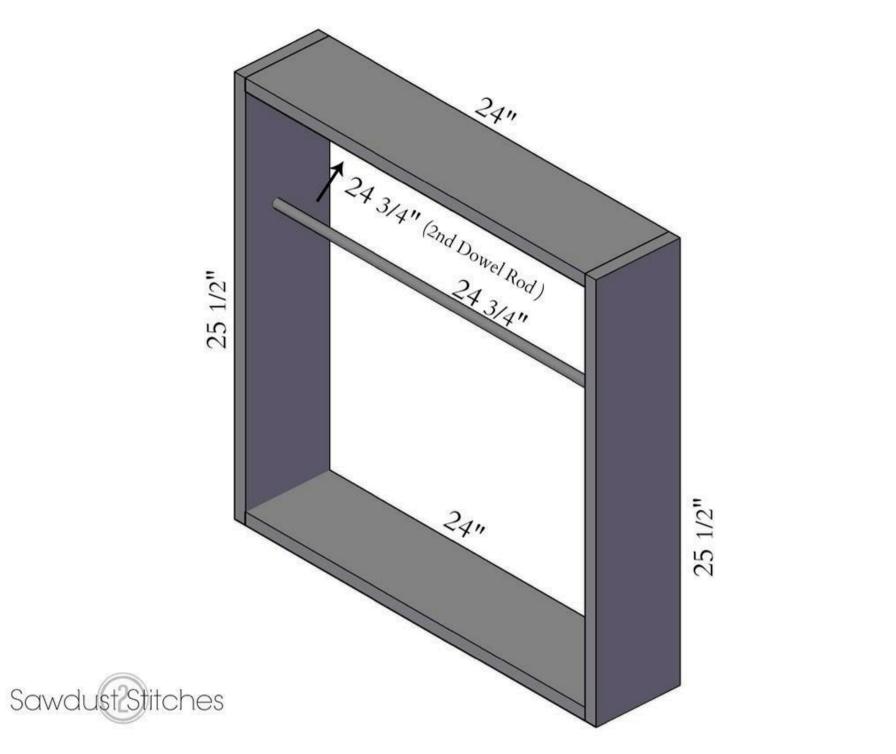

Page 4 of 8




Front Rails

2

Attach the 25 1/2" 1x2" board(s) to the face of the unit using wood glue and 2 inch 16 gauge finishing nails.

Secure your 1x6x24" that has been ripped down to 4 3/4" wide, using wood glue and 2" 16 gauge finish nails.

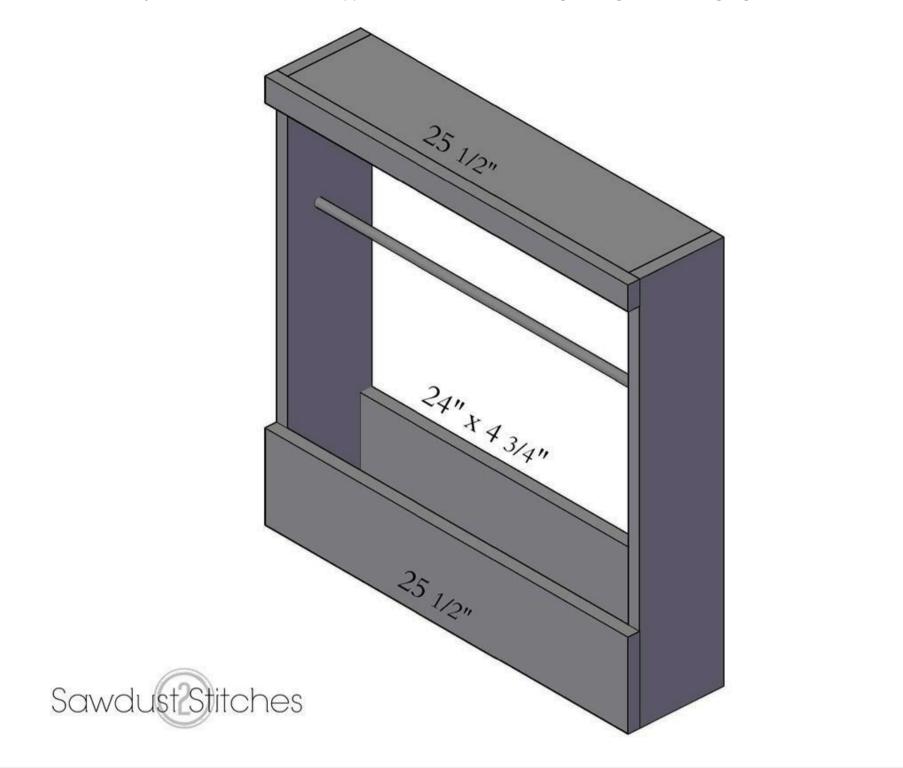

Page 5 of 8




Di

3

Dividers

Place the (4) dividers (1x6" board ripped down to 4 3/4" wide, and then cut into 4 3/4" boards). Secure using wood glue, and 2" 16 gauge finish nails.

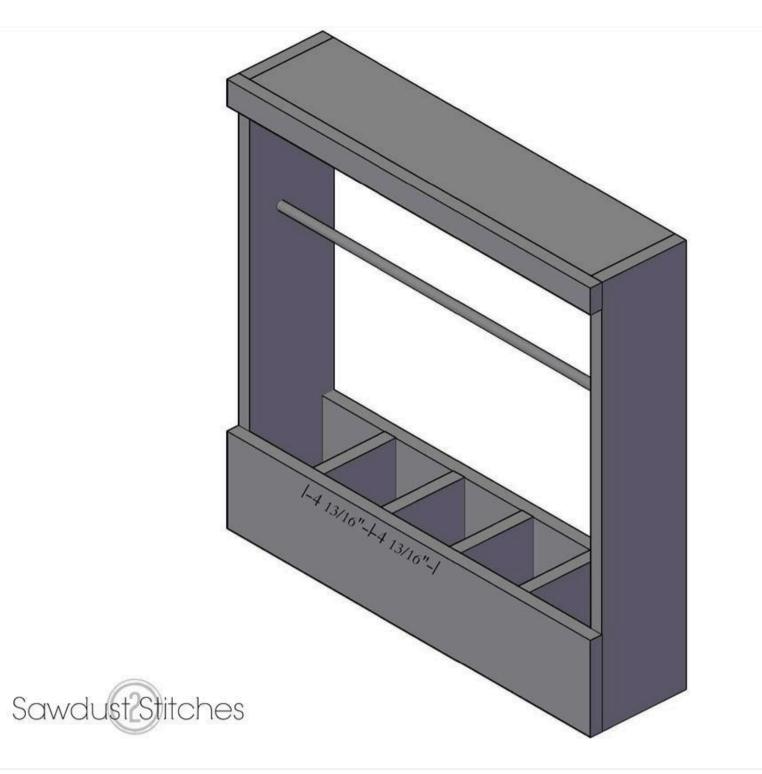


Page 6 of 8



Back Support

4

Attach the remaining 24" 1x2"board using wood glue and 2 inch 16 gauge finishing nails. This is an ideal place to attach the unit to the wall, or you can attach hanging hardware to the back.

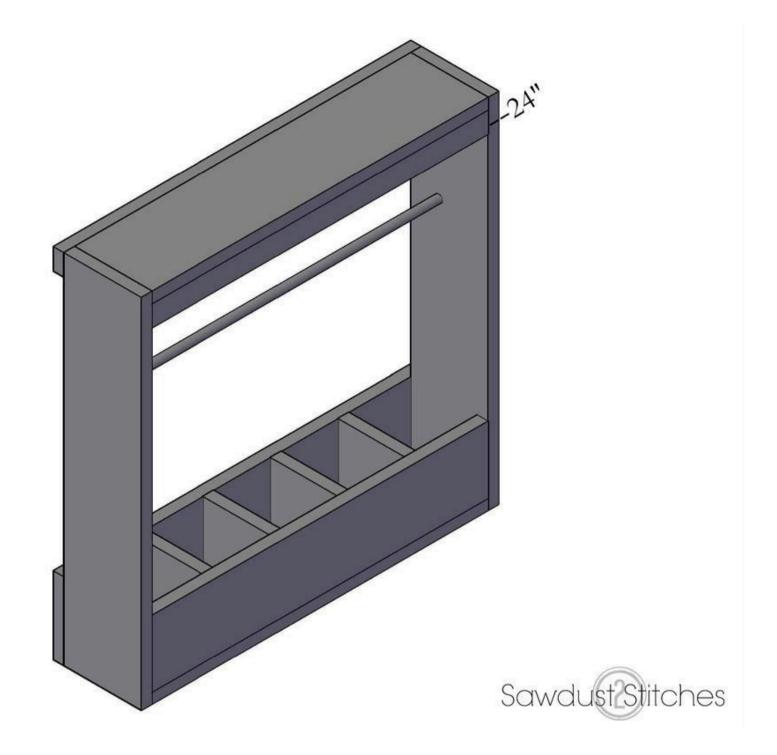

Finish

5

Fill all nail holes with wood filler. Sand smooth, then apply desire stain and/or paint. If desired add "label hardware" and "s" hooks to the dowel rod.

Page 7 of 8




Drill Dowel Holes

6

Before assembling frame pre-drill holes for dowel rods in the

1"x 6"x 25 1/2" boards. Use a 1/2" bit and drill 3/8" deep. You will need to make a mirror copy on to the remaining 1"x 6"x 25 1/2" board.

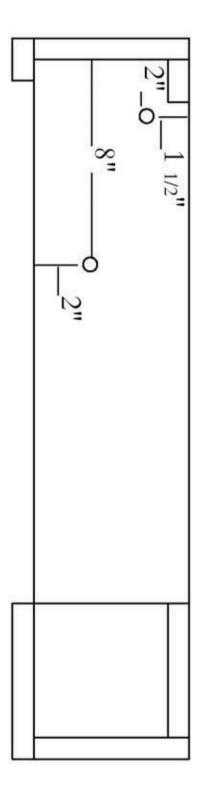



Page 8 of 8