

K-Cup Coffee Dispenser

Difficulty

Easy

An easy K-cup dispenser to hold K-cups or coffee pods.
















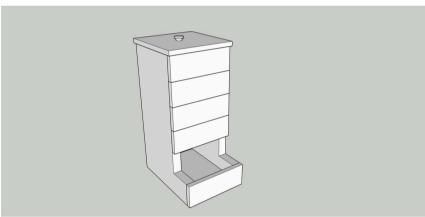



Tools

Kreg Tools

Kreg®

Pocket- Kreg® Pocket-Hole Jig 720

Hole Jig 720

Other Tools

Jigsaw

Miter Saw

Table Saw

Tape Measure

Drill (cordless)

Nail Gun

Sander

Materials

Wood Products

- **1** Board, 1x8, 36"
- **1** Board , 1x6 , 24"
- **1** Board , 3/8" , 48"


Hardware & Supplies


- 1 Top Pull
- 10 11/4" Kreg Pocket Hole Screws




Cut List & Parts


- Base , 3/4" X 4" X 7 1/4"
- Sides , 3/4" X 7 1/4" X 12"
- Back , 3/4" X 4" X 11 1/4"
- Front Pieces , 3/16" X 5 1/2" X 2"
- Top, 3/8" X 5 1/2" X 5 5/8
- Sub-top, 3/8" X 4" X 4 1/2"
- Bottom Front Piece , 3/8" X 5 1/2" X 2"

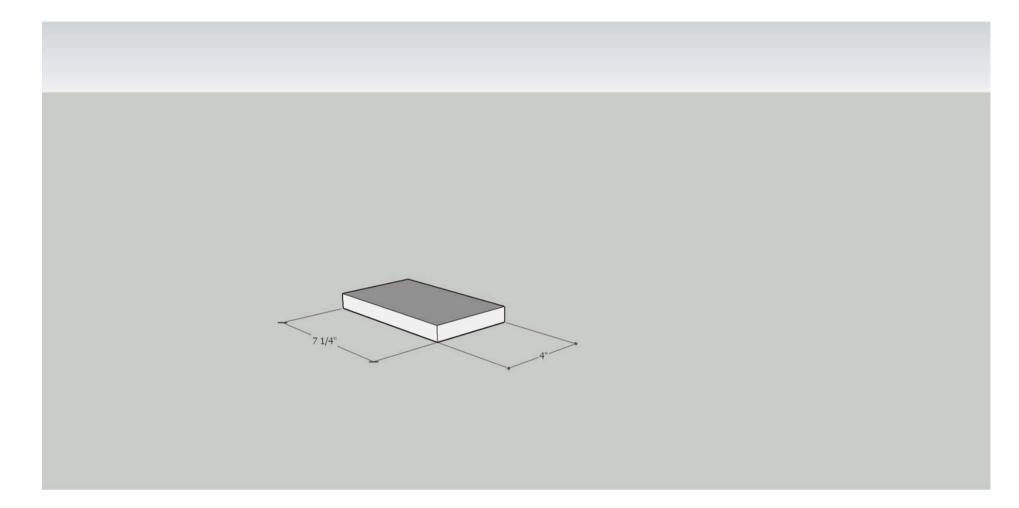

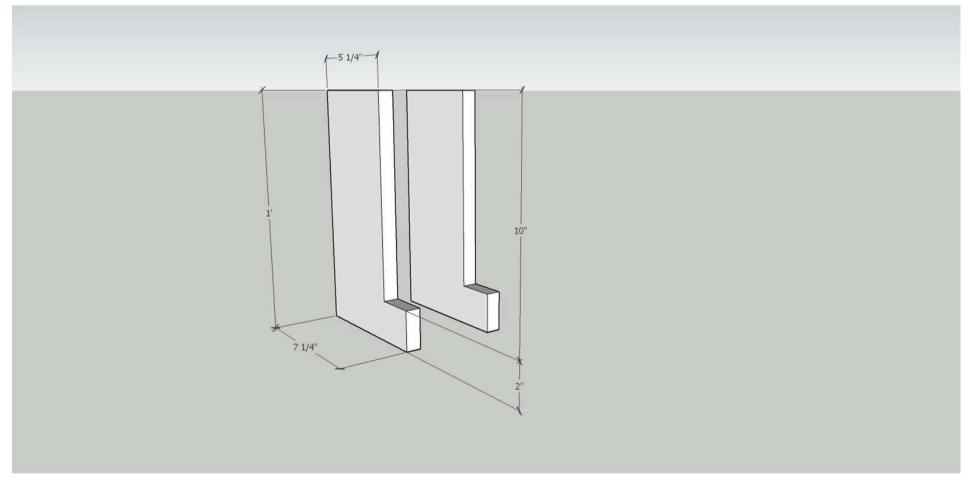





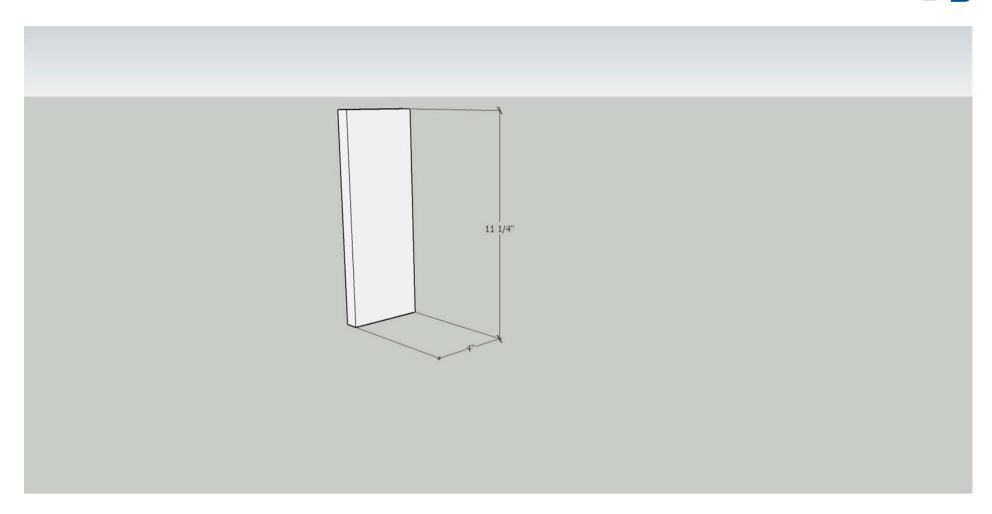

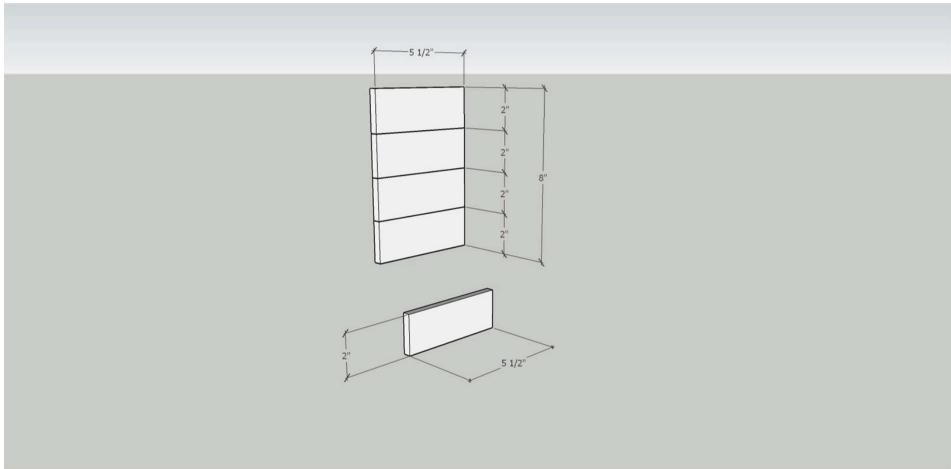



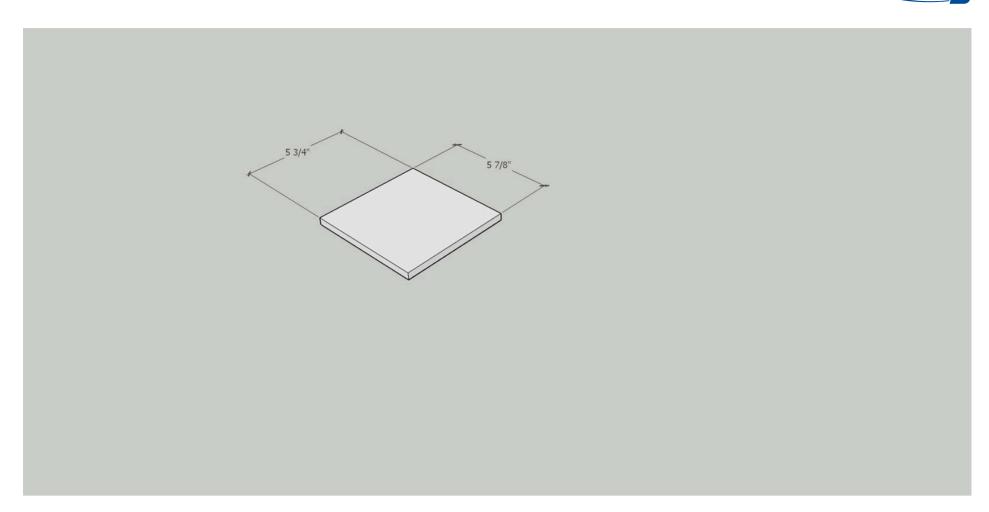

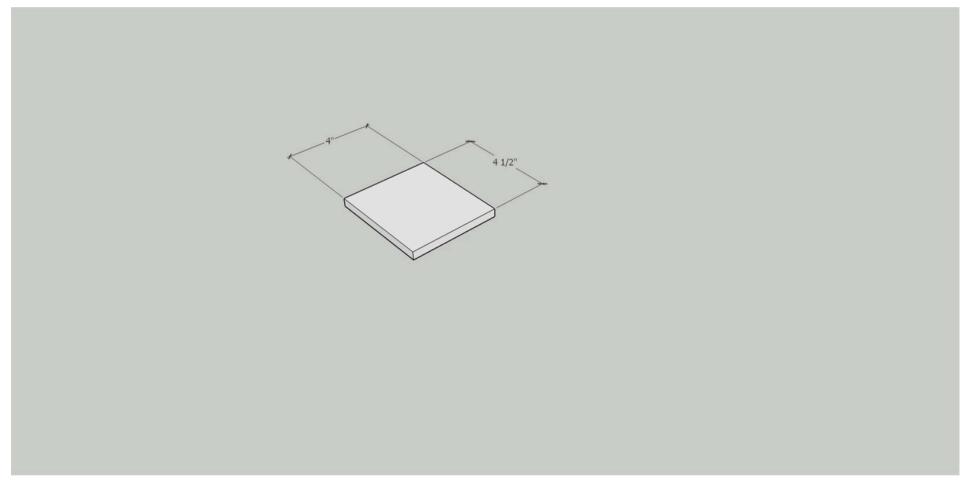




Directions

1

Cut the base


Cut the base per the dimensions indicated.

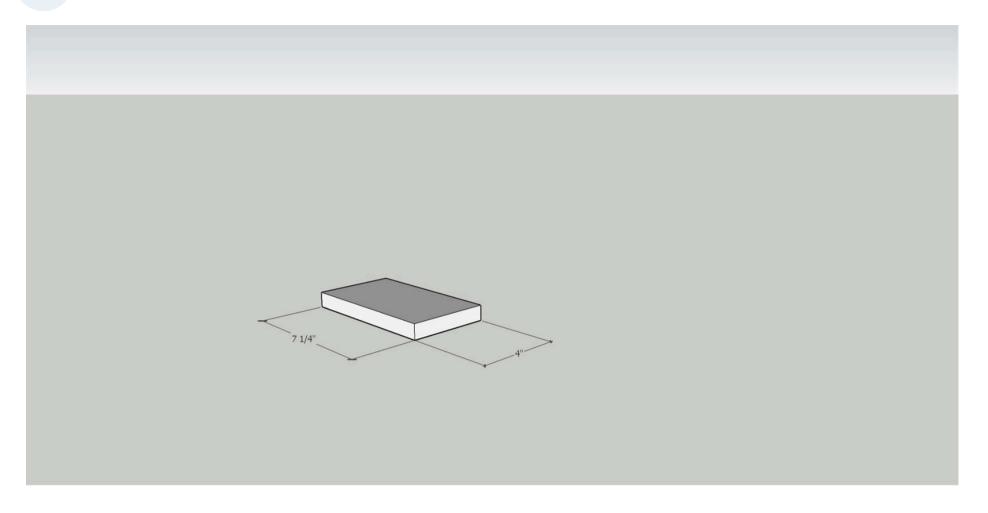

2

Cut the sides

Cut two side panels per the dimensions indicated

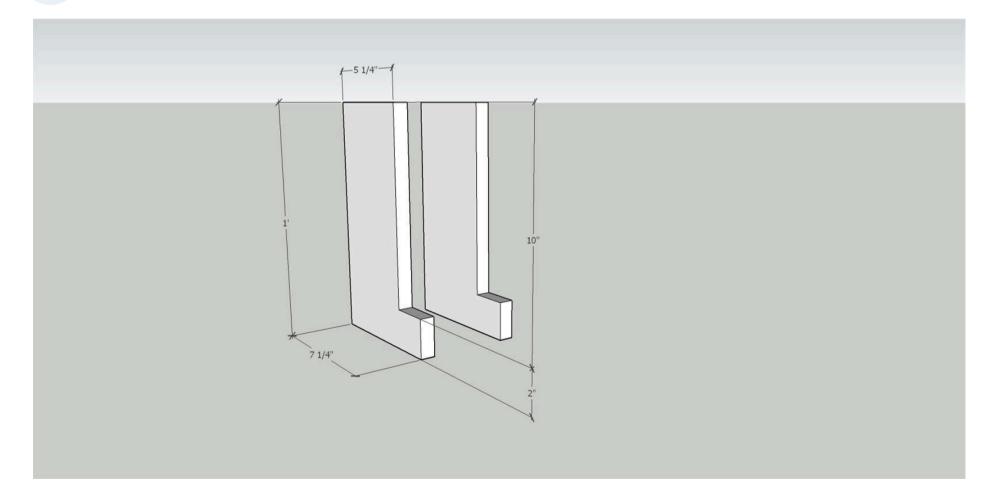




3

Cut the back


Cut the back panel per the dimensions indicated

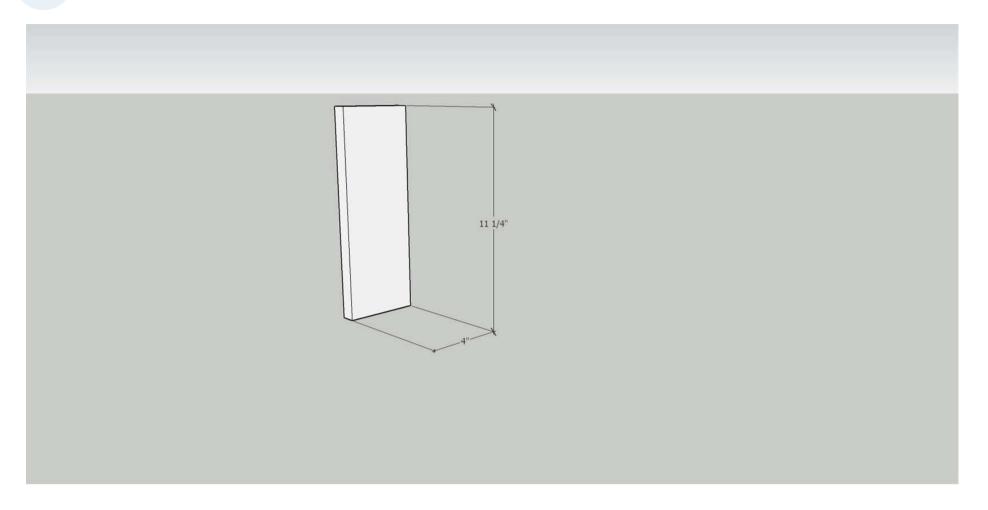



Cut the front pieces

Cut 5 front pieces per dimensions indicated

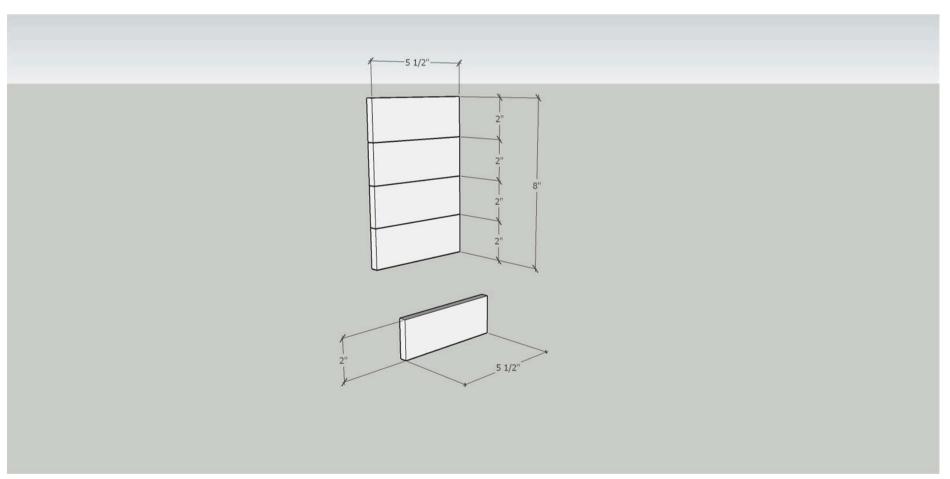




5

Cut the top


Cut the top per dimensions indicated

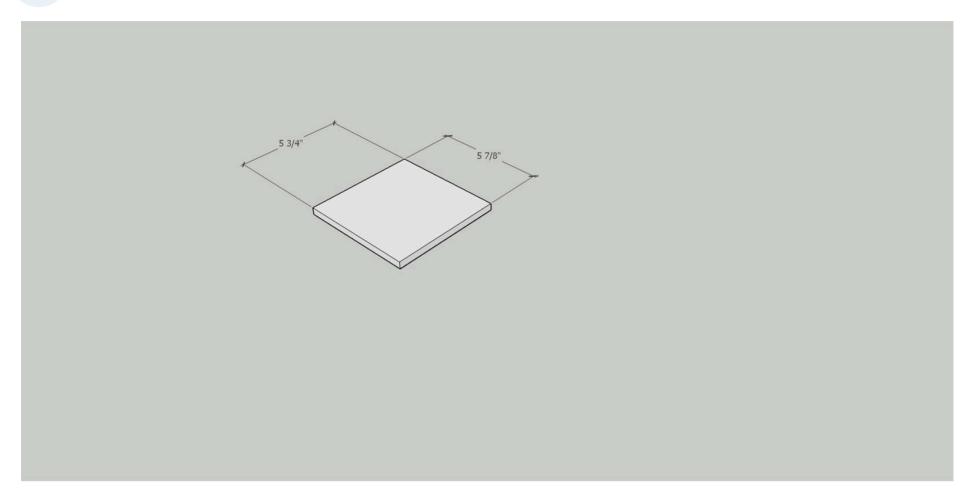



Cut the sub-top

Cut the sub-top per dimensions indicated

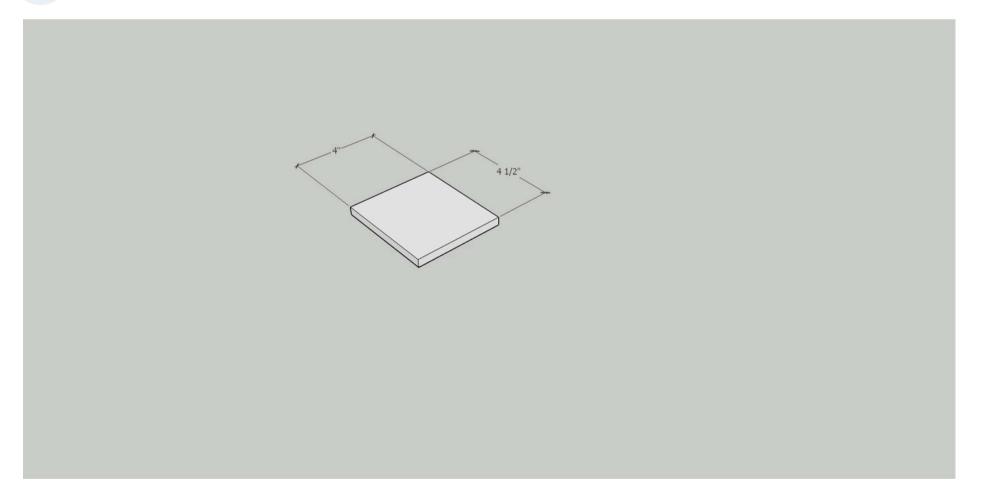






Join the two top pieces


Join the two top pieces by gluing and clamping

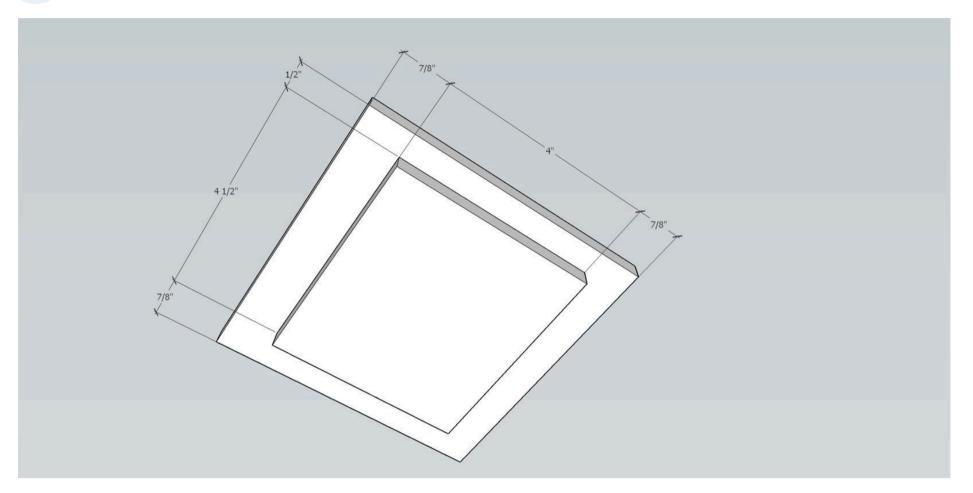



Join the sides to the base

Join the sides to the base by drilling pocket holes as shown in the base and attaching with 1 1/4" pocket hole screws.

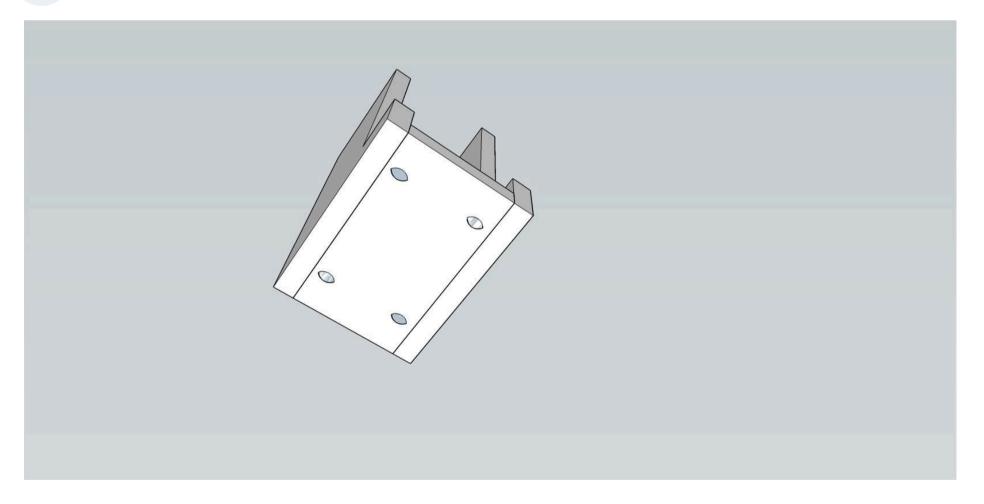






Join the back to the sides


Join the back to the sides by drilling pocket holes as shown and attaching with 11/4" pocket hole screws.

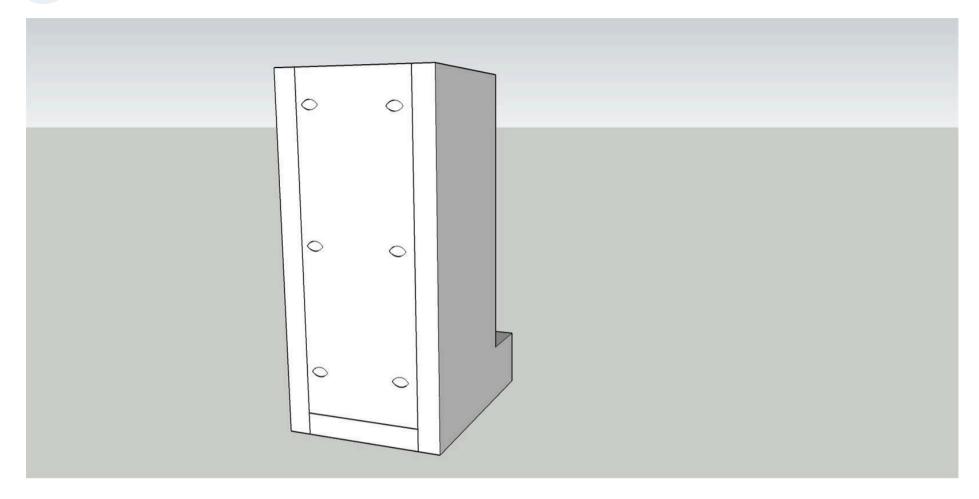



Install the front pieces

Install the front pieces as shown by gluing and clamping

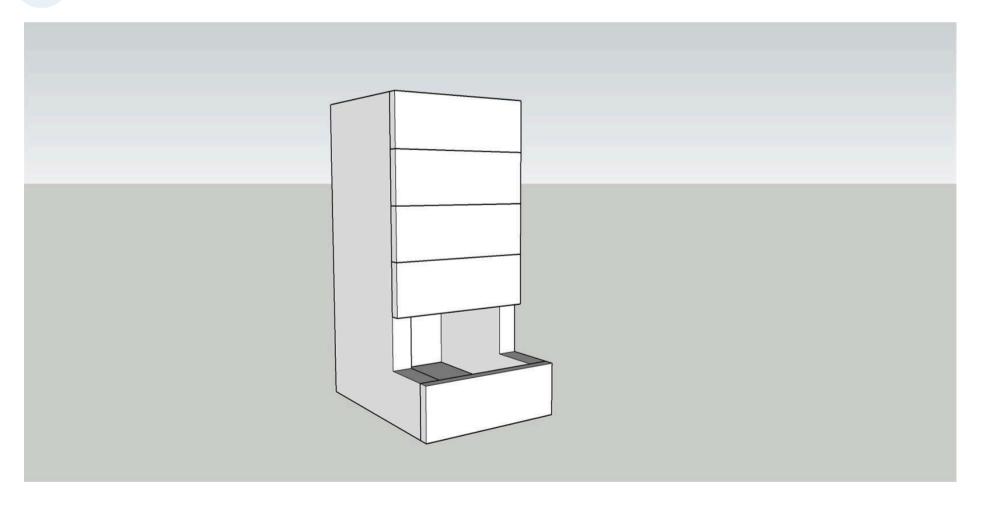






Install the top

Verify that the top fits. Sand as required.

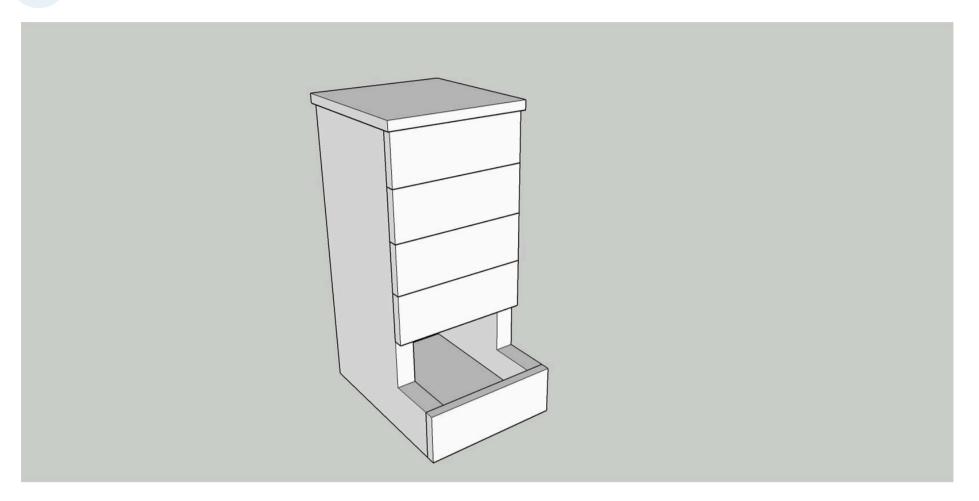



Add top pull

Add a pull of your choice to the top and finish the dispenser.

