

# Jewelry Box Plan

By **Built by Bec Designs**

Difficulty

Easy

---

Build this easy jewelry box for a gift or for yourself!



# Tools

## Kreg Tools



[Kreg® Pocket-Hole Jig 320](#)



[Zinc Pocket-Hole Screws](#)

## Other Tools

- Router
- Miter saw
- Sander
- Drill
- Clamps
- Rabbeting bit
- Jigsaw

# Materials

## Wood Products

- 1 Sheet Of Plywood , 2x4'x ¾"
- 1 Wood , 2 B Ft X¾"

## Hardware & Supplies

- 1 Box Of 1 ¼ Kreg Pocket Hole Screws (See Tools List)
- 1 Variation Of 80, 120 And 220 Grit Sandpaper
- 1 Wood Glue
- 1 Stain Of Choice
- 2 Small Hinges
- 1 Sheet Glass Or Acrylic
- 1 Paint Of Choice
- 2 Knobs
- 2 Hooks

# Cut List & Parts

- 2 Top And Bottom , 8"x6"x3/4"
- 2 Sides , 10"x6"x3/4"
- 4 Doors , 10"x1"x3/4"
- 4 Doors , 1.75"x1"x3/4"
- 4 Legs , 2"x3/4"
- 2 Legs , 4.5"x3/4"
- 1 Back , 8 3/4"x7 1/2" X 3/4"
- 2 Drawer- Sides , 4" X 1 3/4" X 3/4"
- 1 Drawer- Back , 5 1/2"x 1 3/4 X 3/4"
- 1 Drawer- Bottom , 5 1/2" X 4" X 1/4"
- 1 Drawer- Front , 6 1/2" X 2" X 3/4"
- 1 Divider , 6 1/2" X 5 1/2" X 3/4"
- 1 Jewelry Hook , 6 1/2" X 3/4" X 3/4"

# Directions

---

1

## Step one


Cut the plywood to size. Set your pocket hole jig and stop collar to  $\frac{3}{4}$ ". Pocket hole the top and bottom of the jewelry box. Attach to the sides with  $1\frac{1}{4}$ " pocket hole screws and wood glue.



2

## Step two

Pocket hole and glue the doors together.

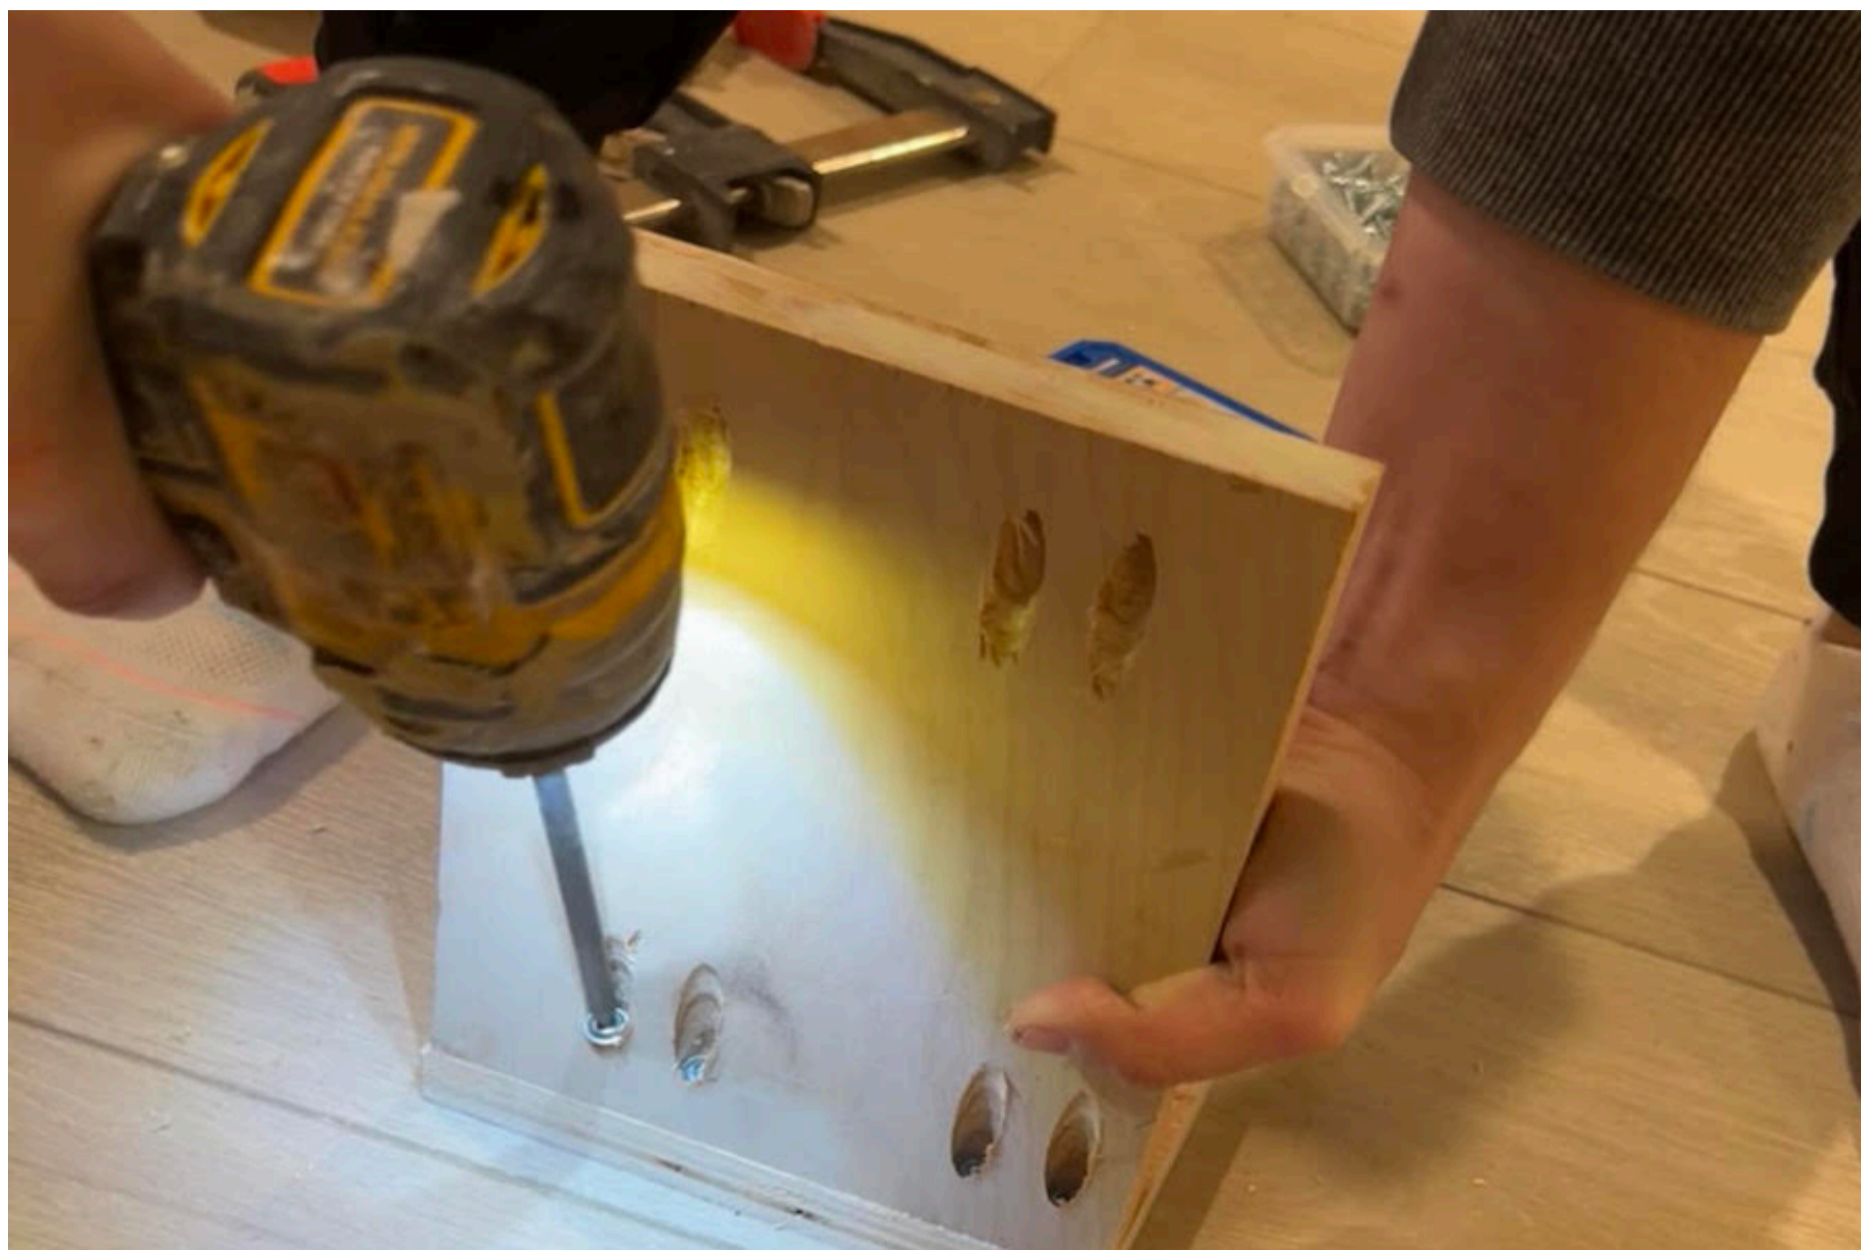

**3****Step three**

Spackle the pocket holes and plywood edges. Optional: edge banding the plywood edges.



**4****Step four**

Rabbet the back side of the box and attach back with nails.



5

### Step five


Glue and nail the drawer box together.



6


### Step six

Attach drawer slides to jewelry box.

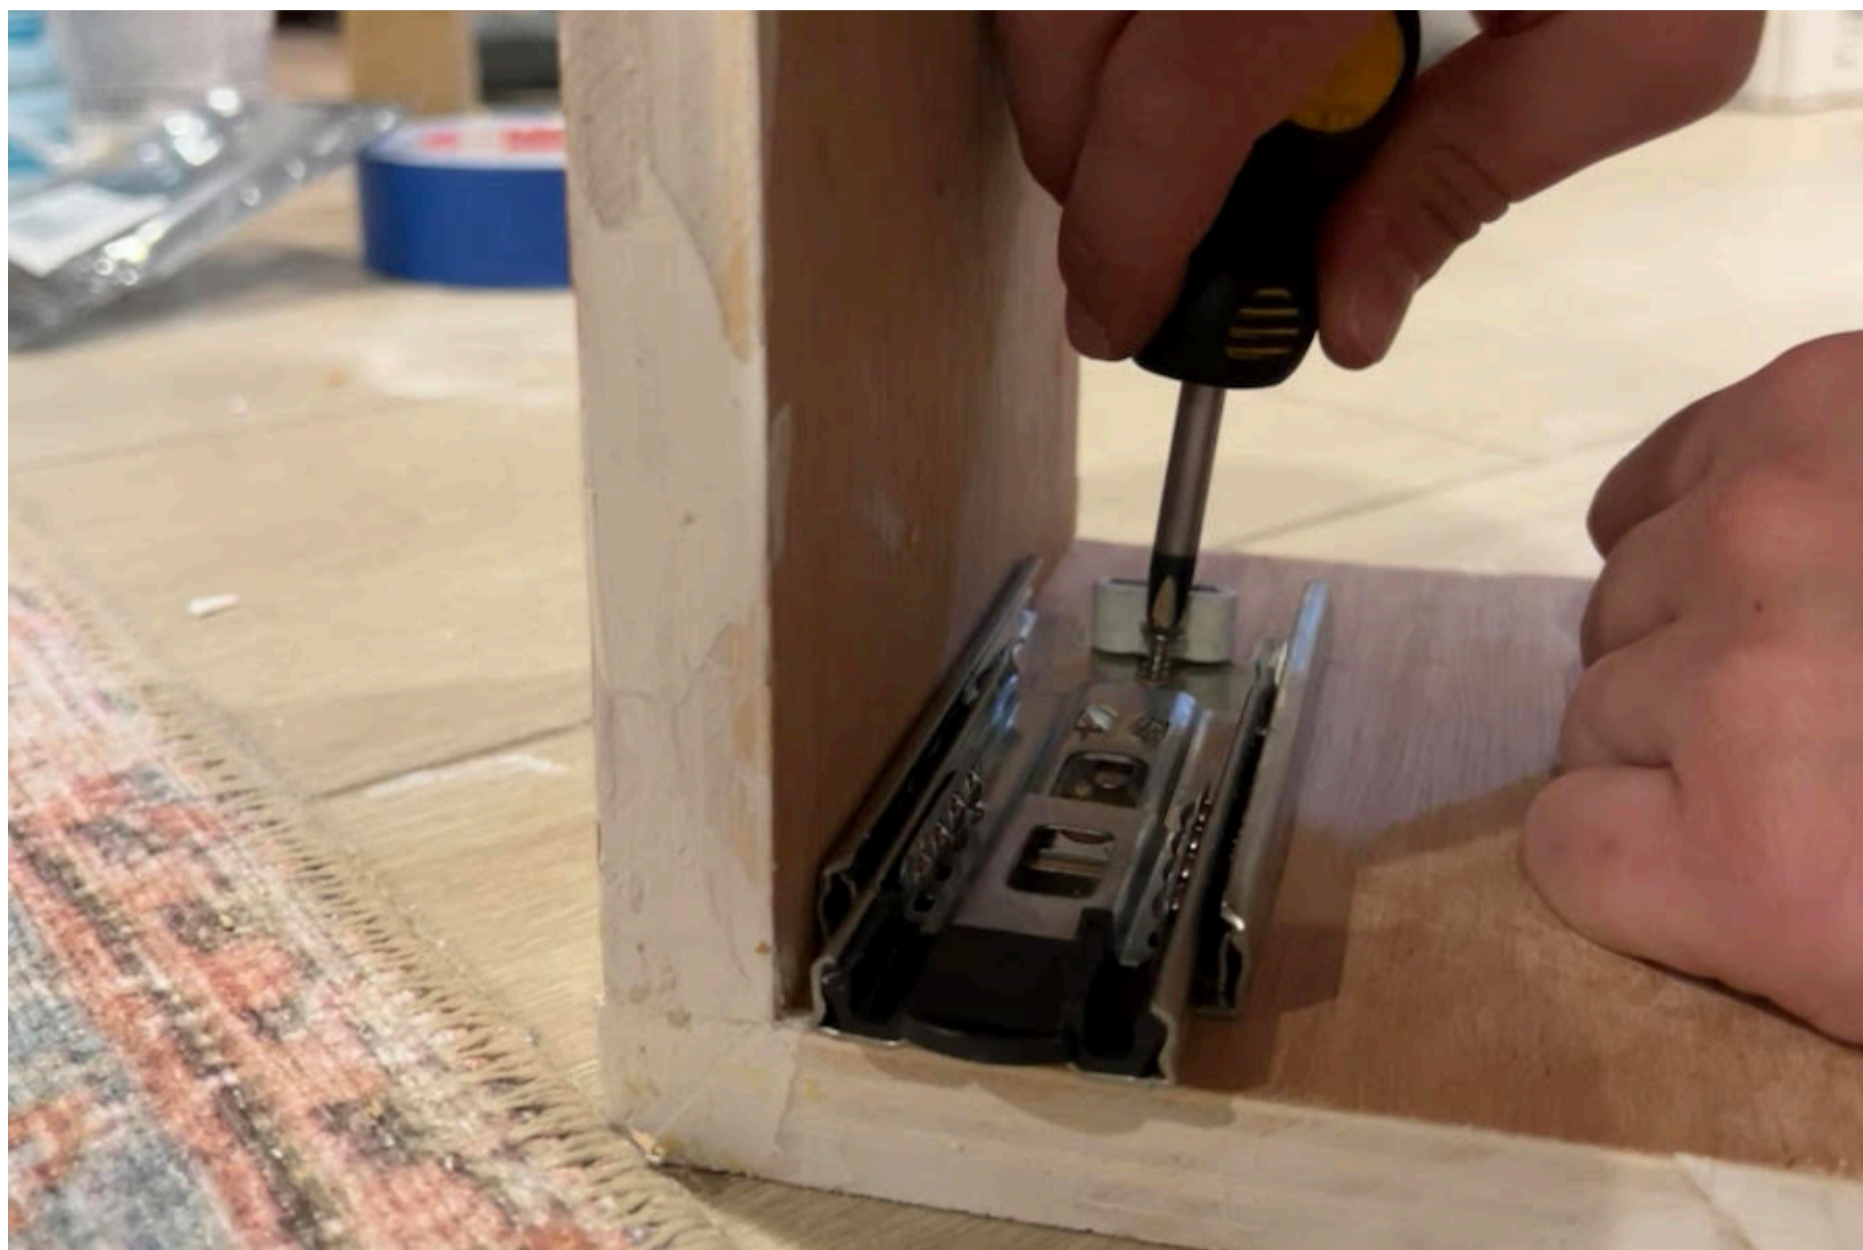

**7****Step seven**

Cut drawer front and attach with brad nails.

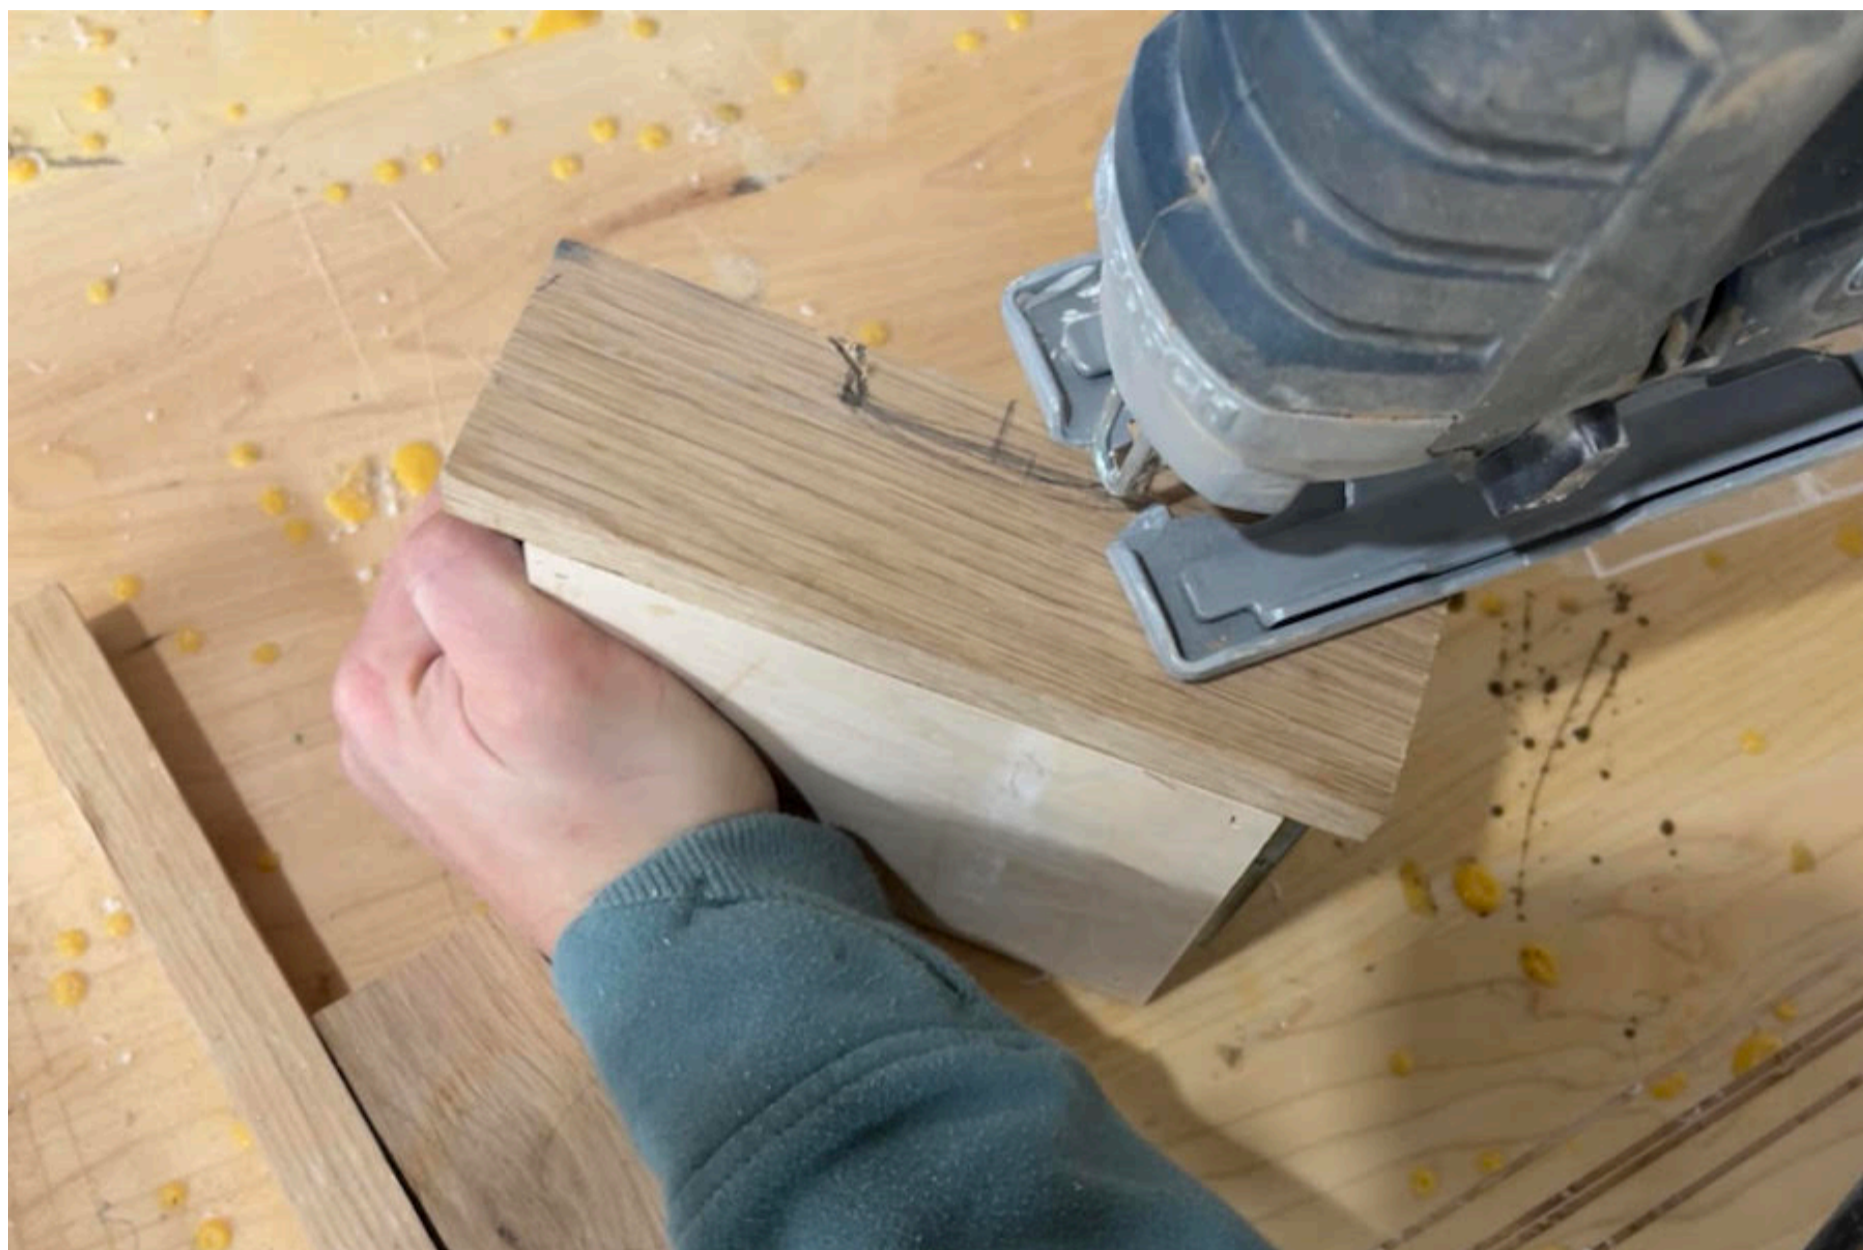

**8****Step eight**

Pocket hole the divider and attach just above the drawers with screws and glue.

**9****Step nine**

Find the center of the drawer and cut the handle to the shape and size you want.

**10****Step ten**

Pocket hole the legs and glue to the underside of the main box. Make sure the pocket holes face down so they aren't visible.



**11****Step eleven**

Paint the main box, insides, legs and door with the color of your choice.



12


## Step twelve

Attach the doors using the small hinges.



**13****Step thirteen**

Attach the knobs by finding the center of your door, drill and screw in.

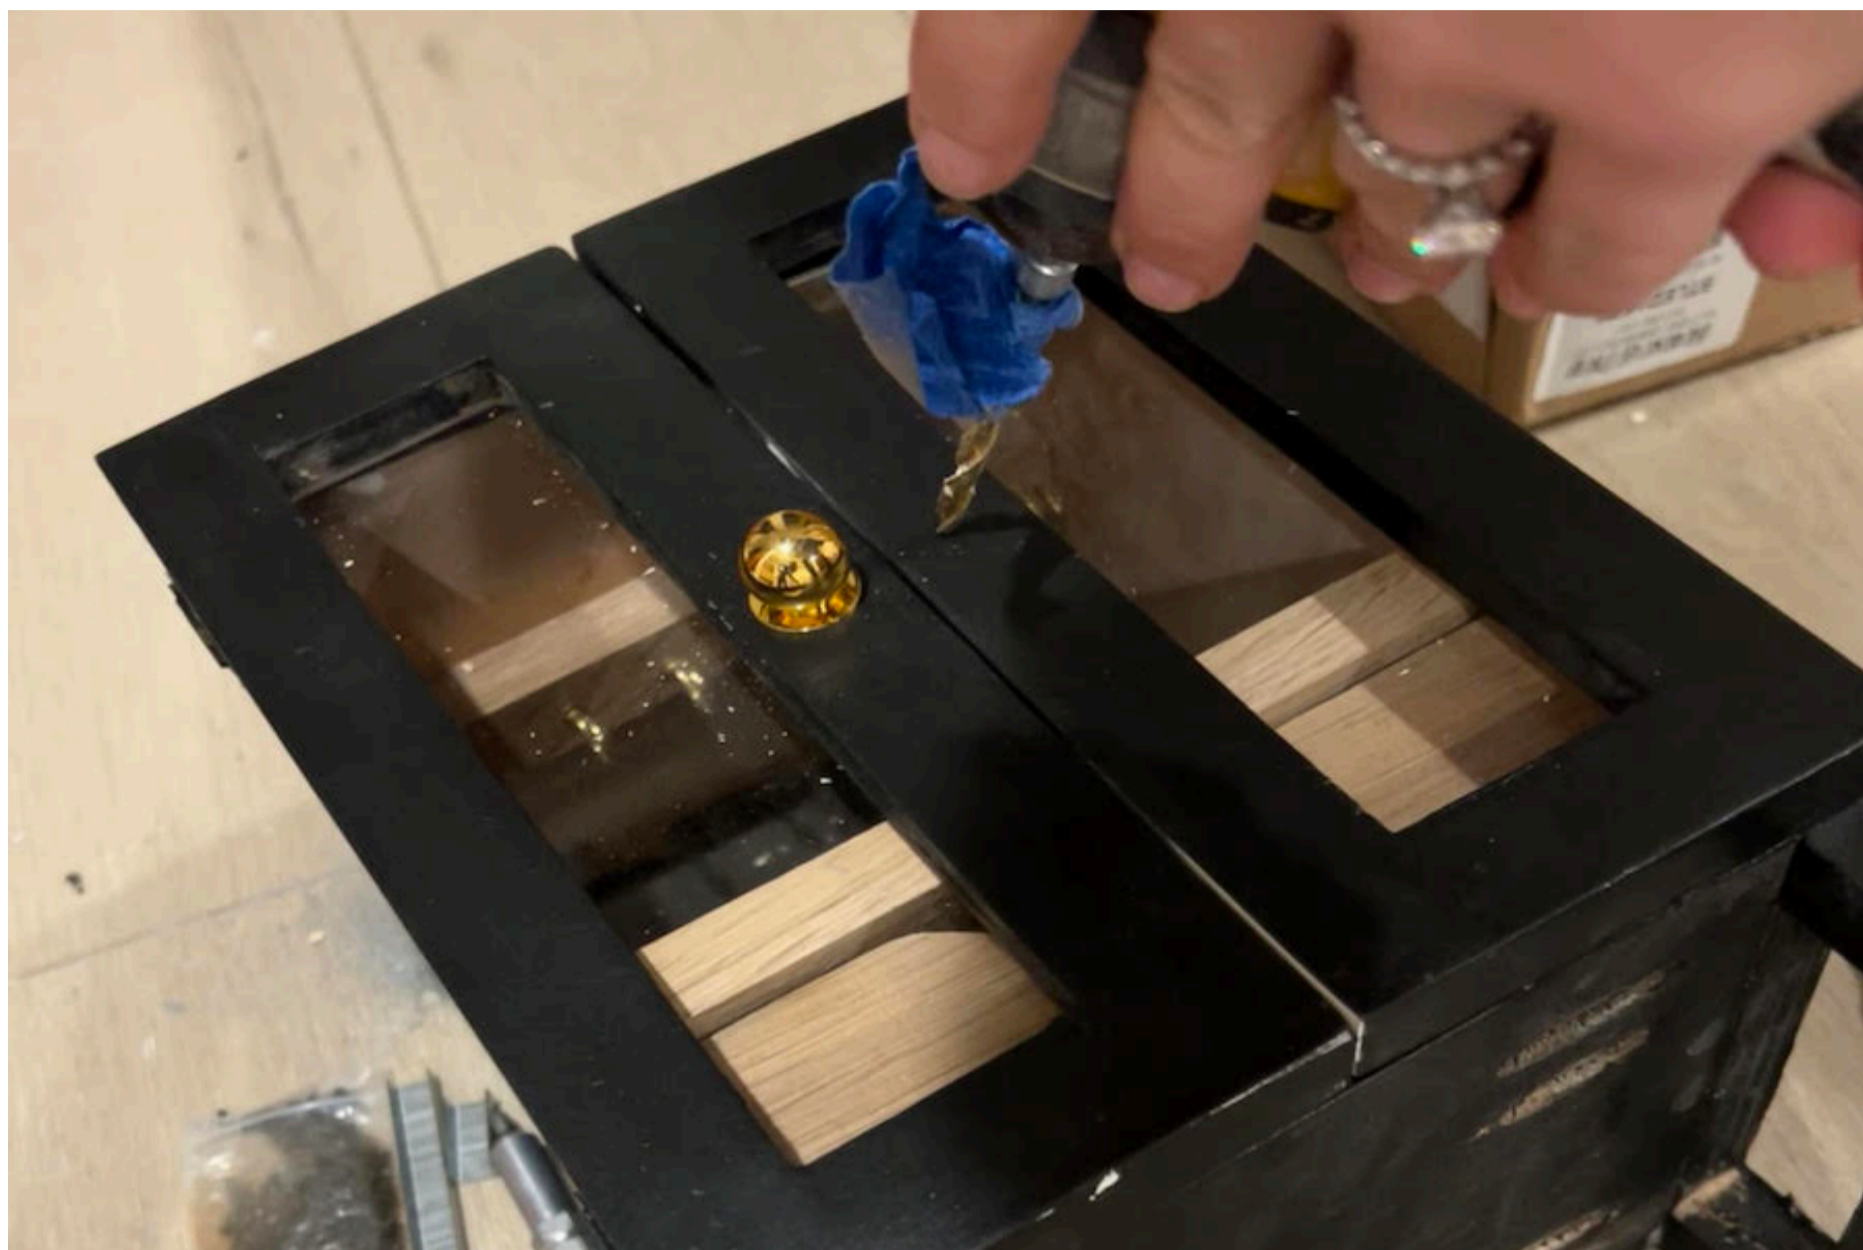

**14****Step fourteen**

Predrill for the hooks in the necklace holder and screw them in. Attach to the inside top of the jewelry box with pocket holes and glue.

**15****Step fifteen**

Using your router and a rabbeting bit, rabbet the inside back of the doors.

**16****Step sixteen**

Cut the acrylic or glass to size and fit into the rabbet of the doors. Use glazing points to keep them in place.

**17****Step seventeen**

Enjoy your new jewelry box!