

work table with storage

Difficulty

Advanced

Looking for a multipurpose work table that also doubles as extra dining space during family gatherings? Or a great homeschool work surface with dedicated storage. Or a craft table? With 22 drawers and 4 open shelves there's plenty of storage space and bonus hidden power in the top surface.















Tools

Kreg Tools

Accu-

CutTM <u>Accu-CutTM</u>

 $\mathsf{Kreg}_{\mathbb{B}}$

Pocket- Kreg® Pocket-Hole Jig 720

Hole Jig 720

Drawer

Slide Jig <u>Drawer Slide Jig</u>

Other Tools

Circular Saw (cordless)

Miter Saw

Tape Measure

Drill (cordless)

Nail Gun

Sander

Materials

Wood Products

- **8** Board, 2x3, 96"
- 2 Plywood , 3/4" Thick , Full Sheet
- **5** Board, 1x4, 96"
- **7** Board, 1x6, 96"
- **10** Board, 1x3, 96"
- 1 Plywood , 1/4" Thick , Full Sheet
- 1 Plywood , 1/4" Thick , Quarter Sheet
- **7** Board , 1x2 , 96"
- **1** Board , 2x2 , 120"

Hardware & Supplies

100 1.25" Pocket Hole Screws

50 2 1/2" Pocket Hole Screws

50 2" Pocket Hole Screws

100 1.25" Wood Screws

100 3/4" Finish Nails

22 14" Bottom Mount Drawer Glides

8 Corner Braces Or Steel Angles



Cut List & Parts

- **12** Legs, 2x3 @ 28 1/2"
- 10 Side Panel Top & Bottom, 2x3 @ 28"
- **4** Sides , 3/4" @ 28" X 20 1/2"
- **2** Aprons , 1x4 @ 28"
- **4** Shelf Base , 3/4" @ 15 3/4" X 12"
- 4 Shelf Back , 1x6 @ 12"
- 4 Shelf Tower Supports , 1x3 @ 12"
- 6 Top Suppports, 1x3 @ 20"
- **24** Drawer A Front & Back , 1x3 @ 9 1/4"
- **24** Drawer A Sides , 1x3 @ 15 1/2"
- 12 Drawer A Base, 1/4" @ 10 3/4" X 15 1/2"
- **12** Drawer A Front , 1x4 @ 11 3/4"
- 8 Drawer B Front & Back , 1x4 @ 9 1/4"
- 8 Drawer B Sides , 1x4 @ 15 1/2"
- **4** Drawer B Base , 1/4" @ 10 3/4" X 15 1/2"
- 4 Drawer B Front , 1x6 @ 11 3/4"
- **12** Drawer C Front & Back , 1x2 @ 17 1/4"
- **12** Drawer C Sides , 1x2 @ 15 1/2"
- **6** Drawer C Base , 1/4" @ 10 3/4" X 15 1/2"
- 6 Drawer C Front , 1x3 @ 19 3/4"
- **12** Top, 1x6 @ 45 3/4"
- **2** Top Underlayer , 3/4" @ 45 3/4" X 33"
- 1 Middle Support , 2x2 @ 33"
- **2** Sides , 1x2 @ 93"
- 2 Ends, 2x2 @ 34 1/2"



Directions

1

Overall Dimensions

96"l x 34 1/2"w x 30"h








Step 1: Cut 12 legs and taper the interior bottom corner.

WORK TABLE STEP 1

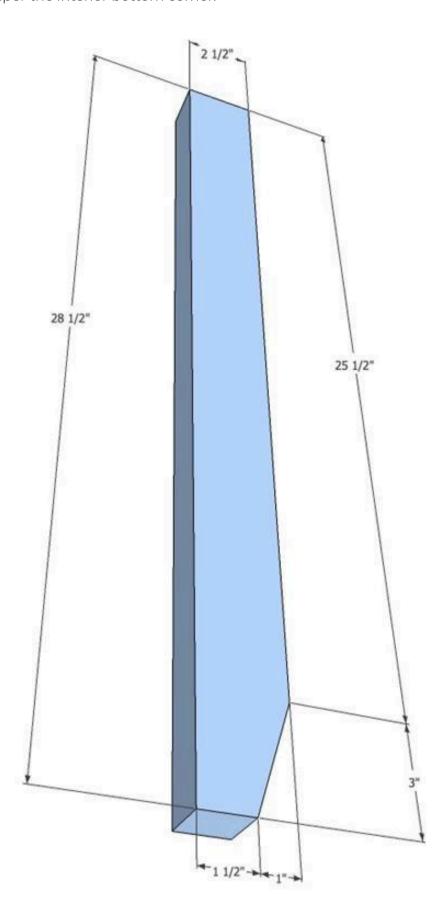






Step 2: Make the tower side panels. Attach top and bottom 2x3 to plywood panel using wood glue and 1 1/4" pocket hole screws. Be sure to pre drill pocket holes into the 2x3 for later attaching to legs. Keep plywood panel flush to interior of 2x3 boards.


Make 4.

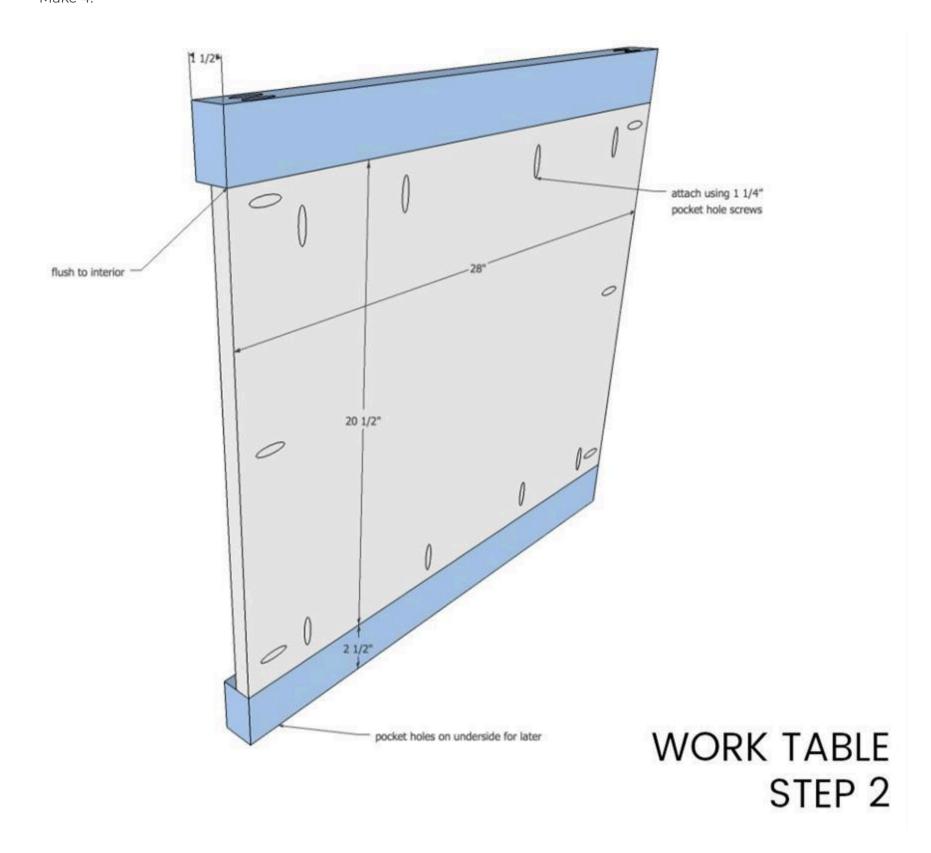





Step 3: Attach legs to side panels using wood glue and 2" pocket hole screws. Keep leg flush to interior of plywood panel.

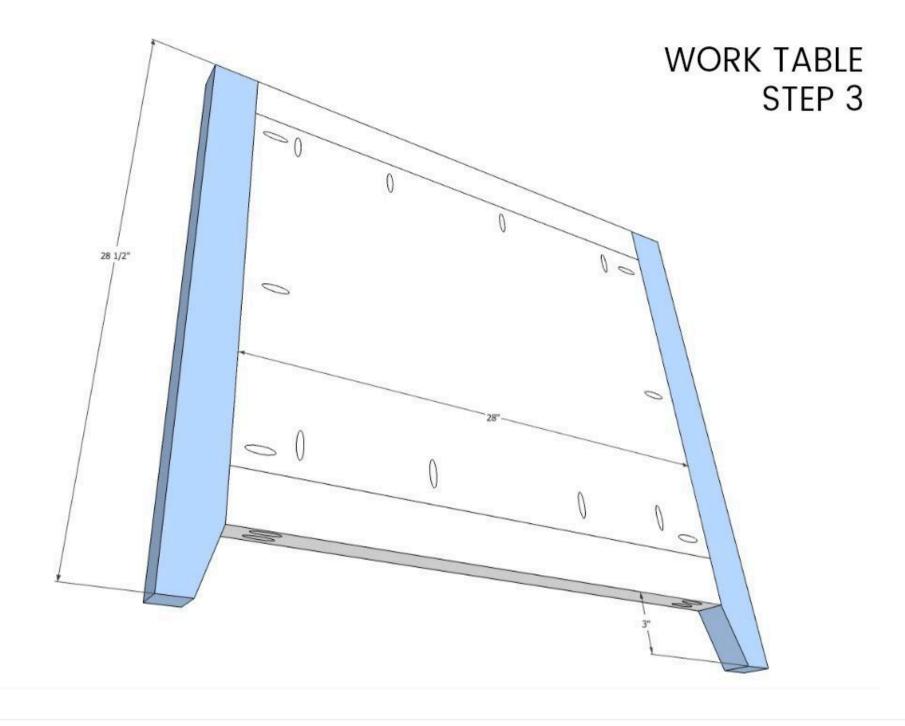






Step 4: Make end leg pieces. Attach 1x4 apron and 2x3 cross support to legs using wood glue and 2 ½" pocket hole screws.

Make 2.

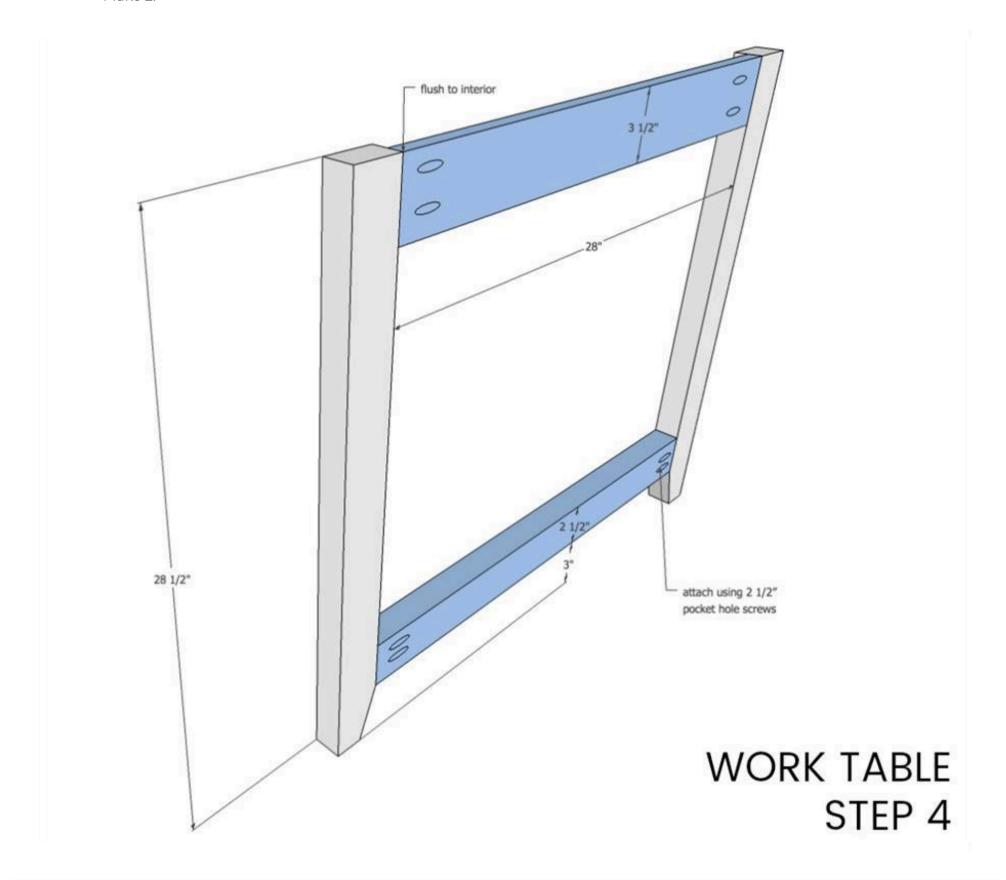






Step 5: Prepare tower shelf by attaching 1x5 back piece to plywood shelf using wood glue and 1 1/4' pocket hole screws.

Make 4.

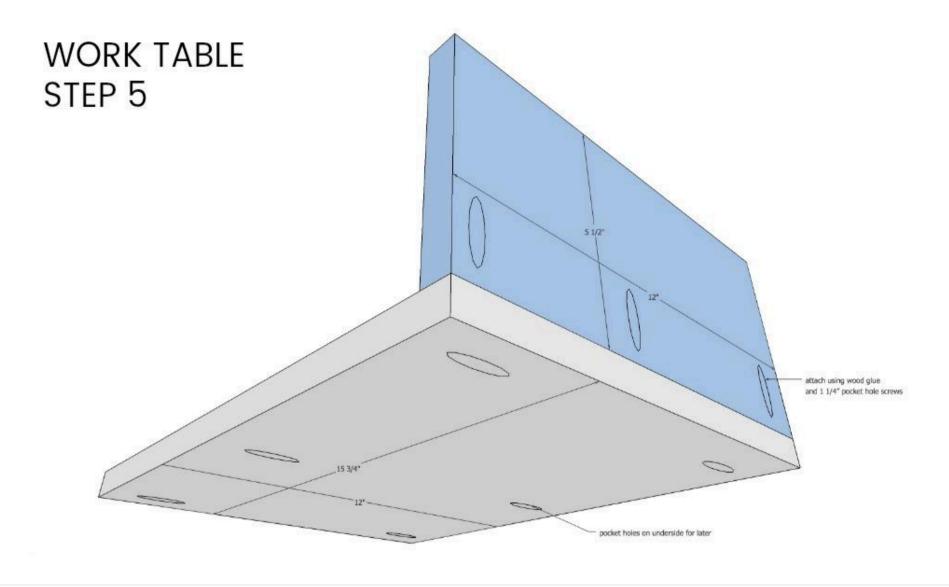






Step 6: Attach shelf portion to one side using wood glue and 1 1/4" pocket hole screws. Also attach bottom tower supports.


Make 2.

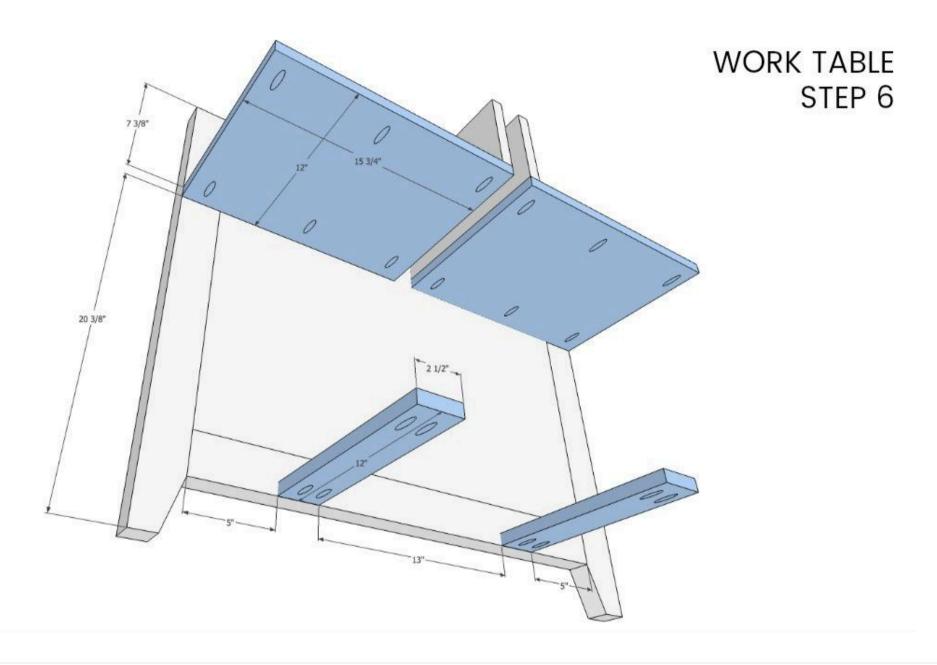






Step 7Step 7: Attach other side panel.

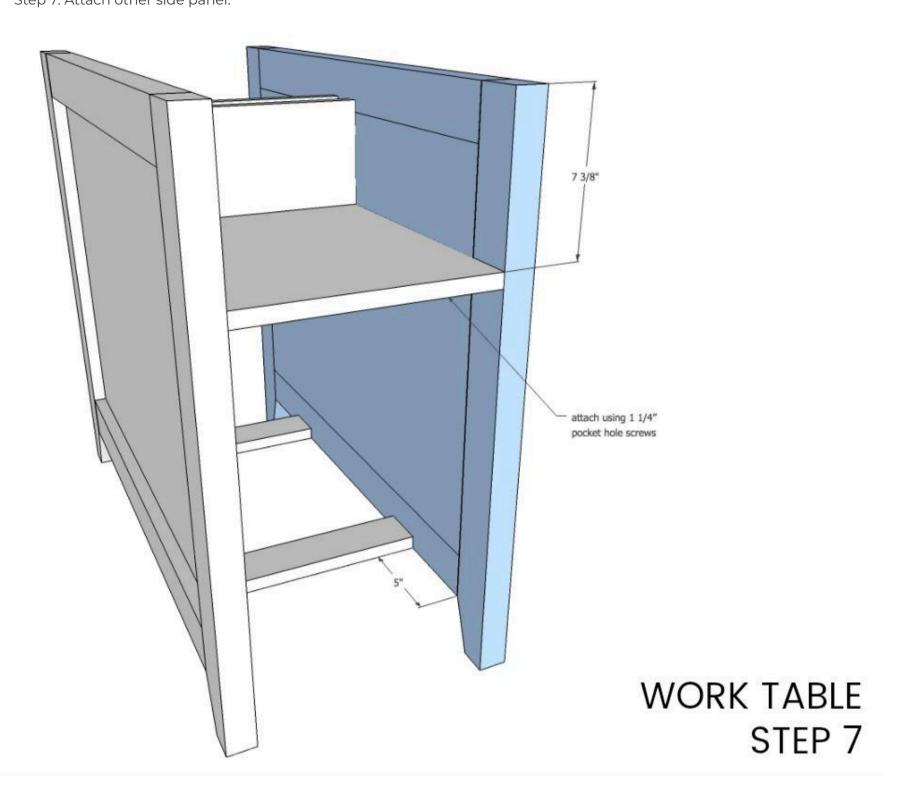





Step 8: Position towers (without drawers) and end leg units and attach top supports using 1 1/4" pocket hole screws.

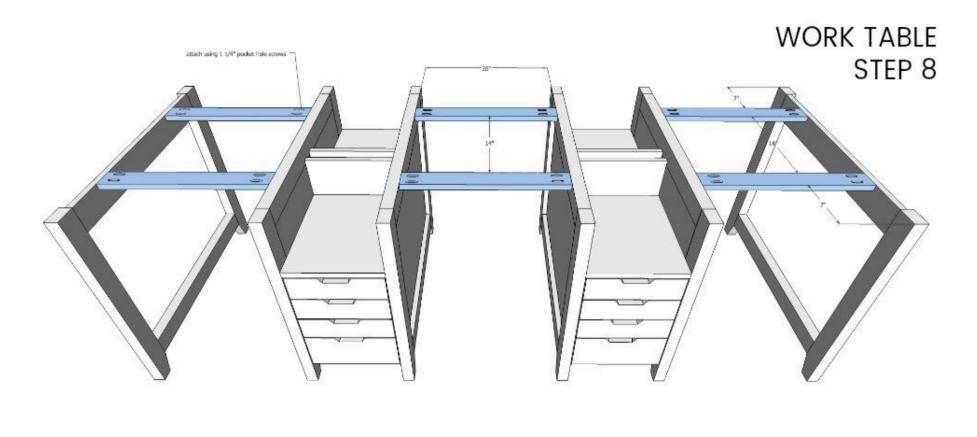




Drawers A Step 1

Step 1: Make the drawer box using wood glue and 1 1/4" pocket hole screws. Keep the pocket holes on the exterior.

Make 12.

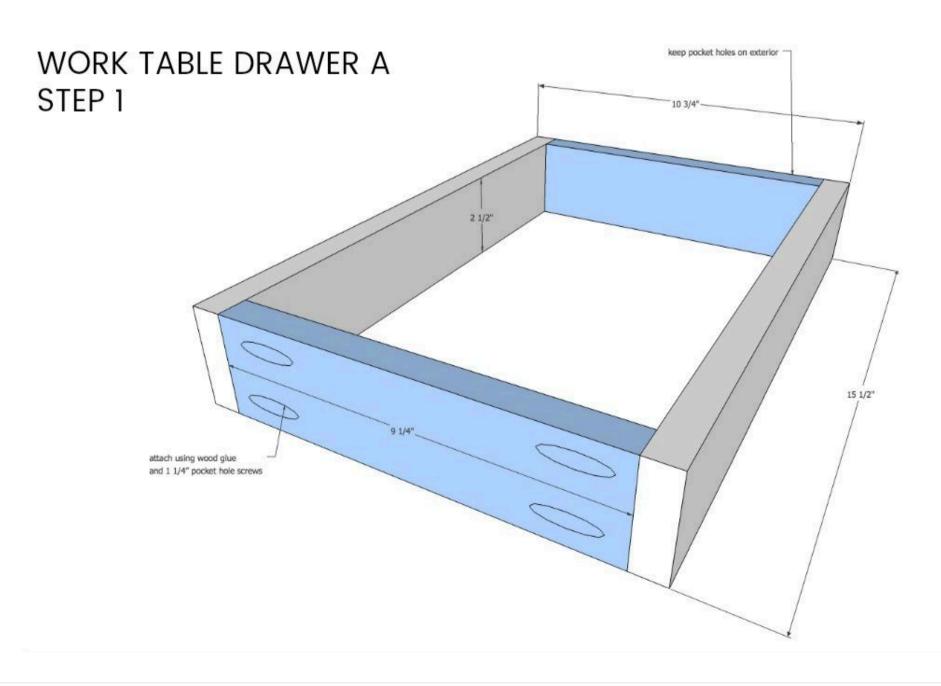






Drawers A Step 2

Step 2: Attach the drawer base to the box using wood glue and 3/4" finish nails.

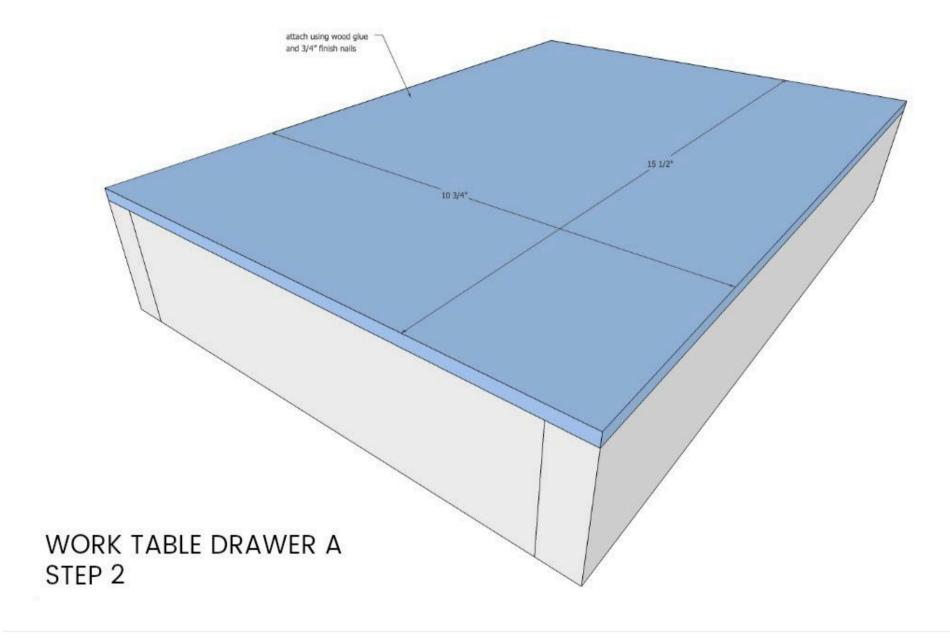






Drawers A Step 3

Step 3: Attach the drawer front to the box using wood glue and 1 ¼" countersink screws. Install drawer glides and fit into base.

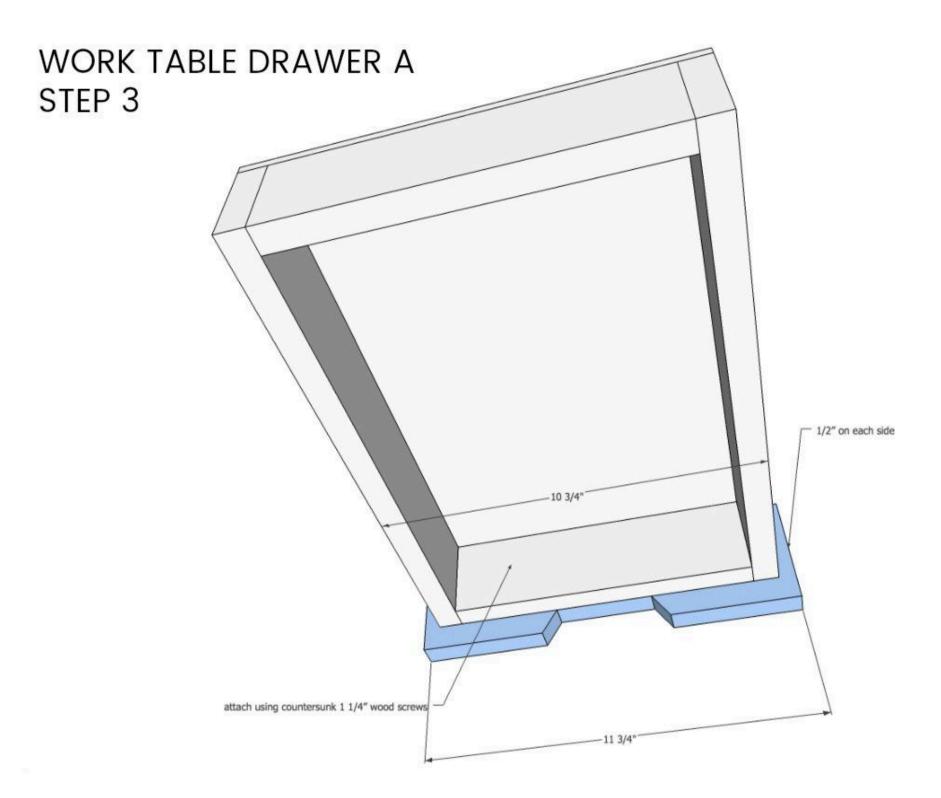






Drawers B Step 1

Step 1: Make the drawer box using wood glue and 1 1/4" pocket hole screws. Keep the pocket holes on the exterior.

Make 4.

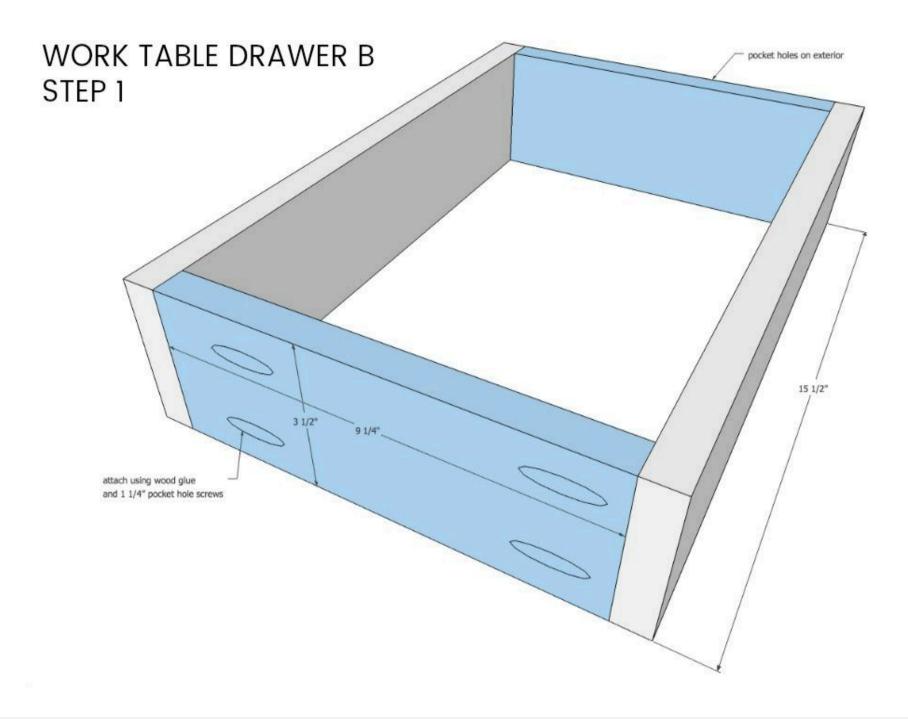






Drawers B Step 2

Step 2: Attach the drawer base to the box using wood glue and $\frac{3}{4}$ " finish nails.

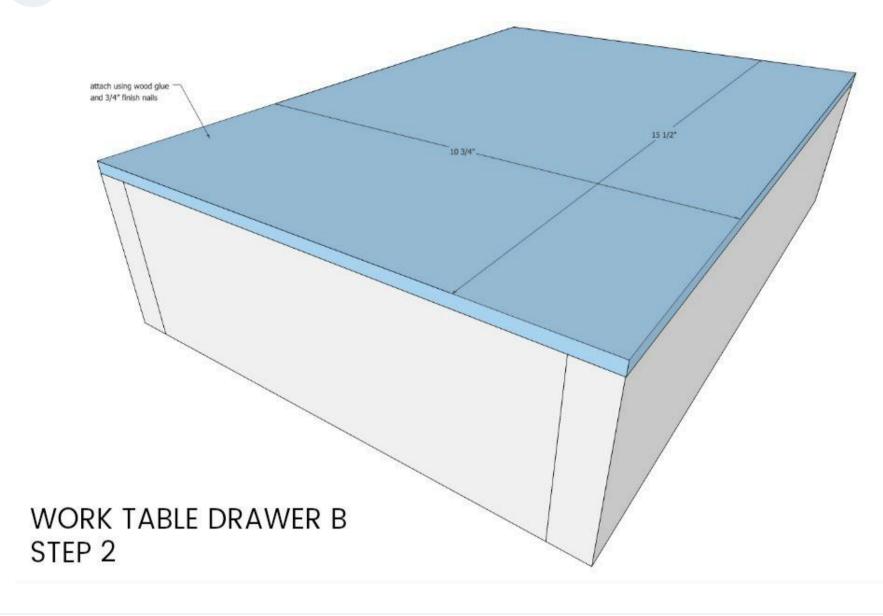






Drawers B Step 3

Step 3: Attach the drawer front* to the box using wood glue and 1 $\frac{1}{4}$ " countersink screws.

* Attach the drawer front after installing drawer glides and placing box into tower.

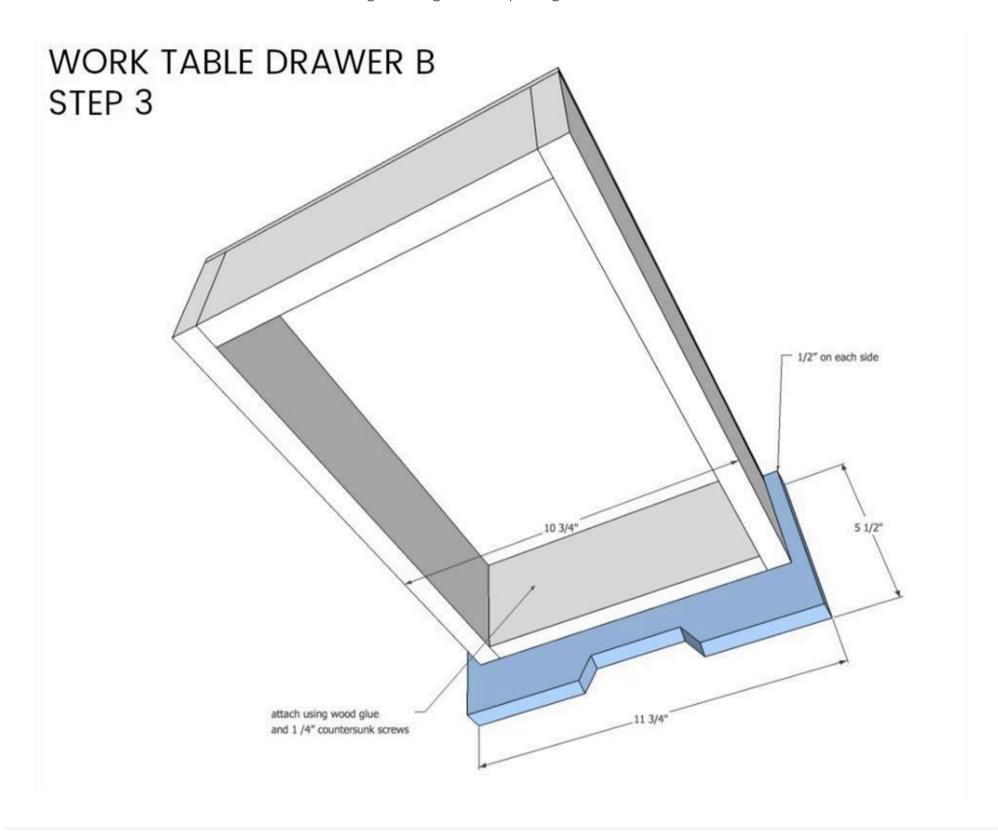






Drawers C Step 1

Step 1: Make the drawer box using wood glue and 1 1/4" pocket hole screws. Keep the pocket holes on the exterior.


Make 6.

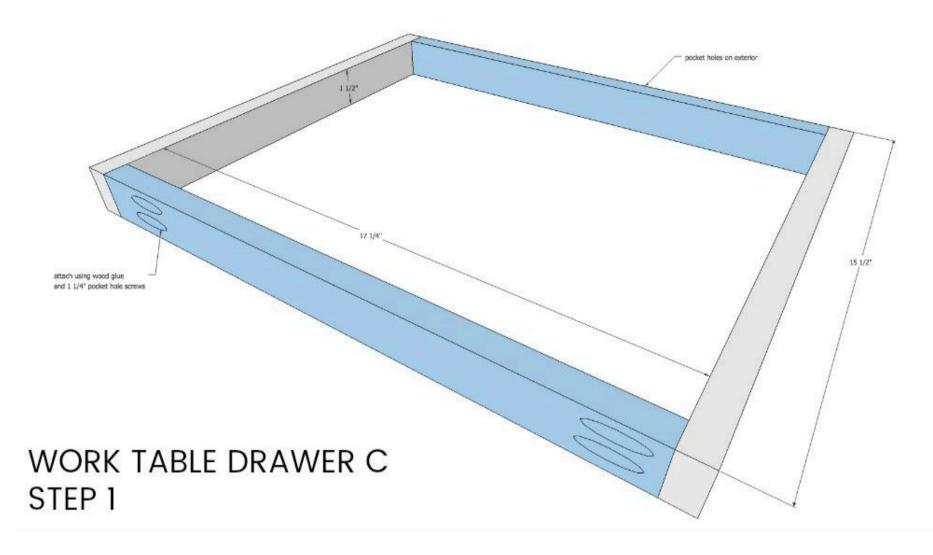



Drawers C Step 2

Step 2: Attach the drawer base to the box using wood glue and 3/4" finish nails.

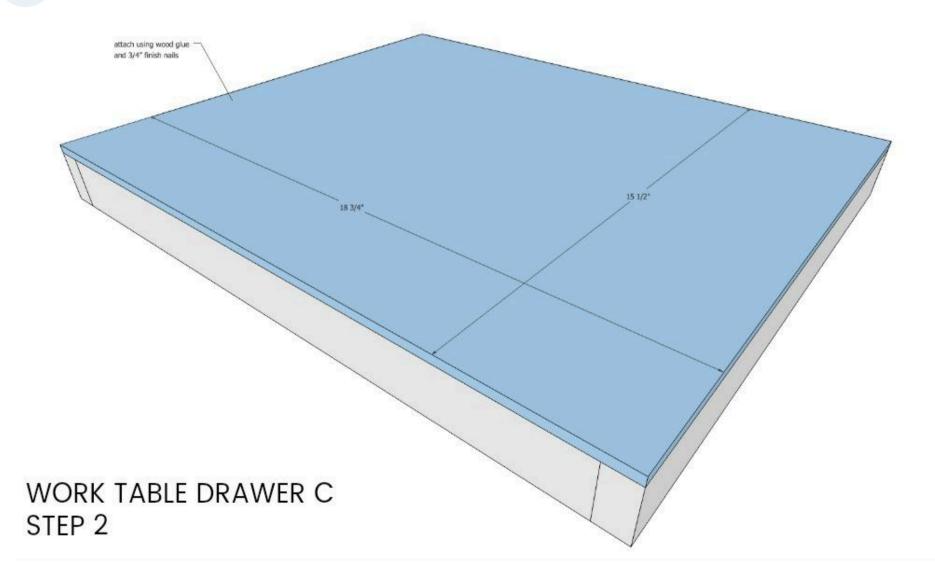






Drawers C Step 3

Step 3: Attach the drawer front to the box using wood glue and $1\frac{1}{4}$ " countersink screws. Install drawer glides and fit into base.

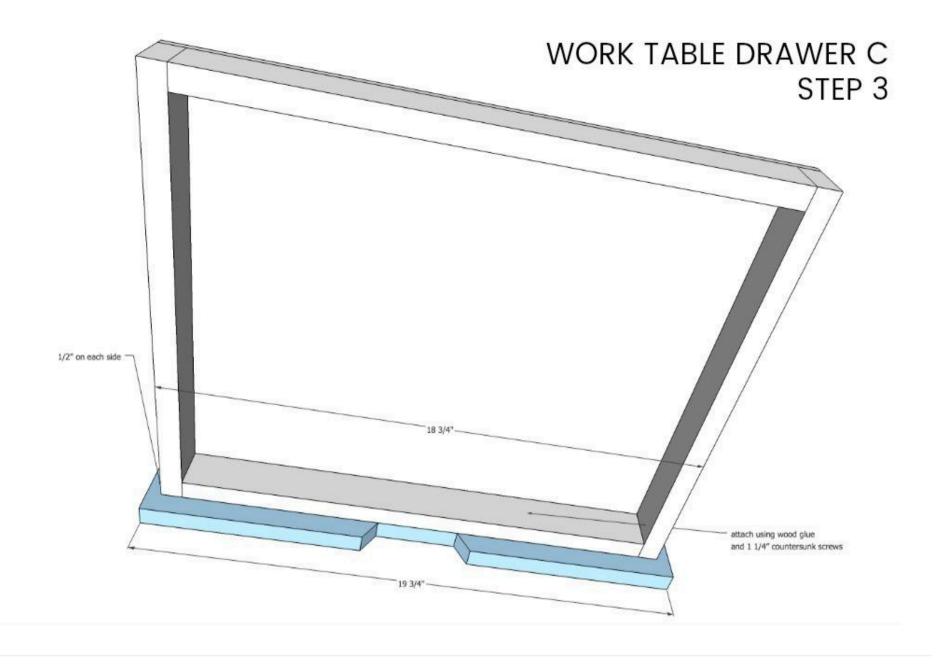






Top Step 1

Step 1: Measure 1x6 width x 6 to determine width of plywood underlayer. Use one full piece at 45 3/4" long or multiple shorter pieces to create a staggered look. Make 2.

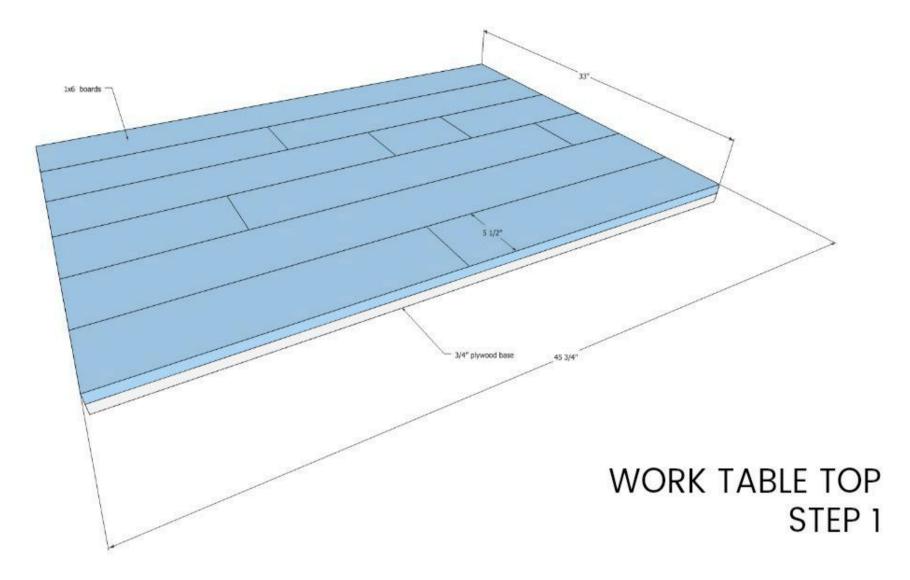






Top Step 1 Underside


Underside view

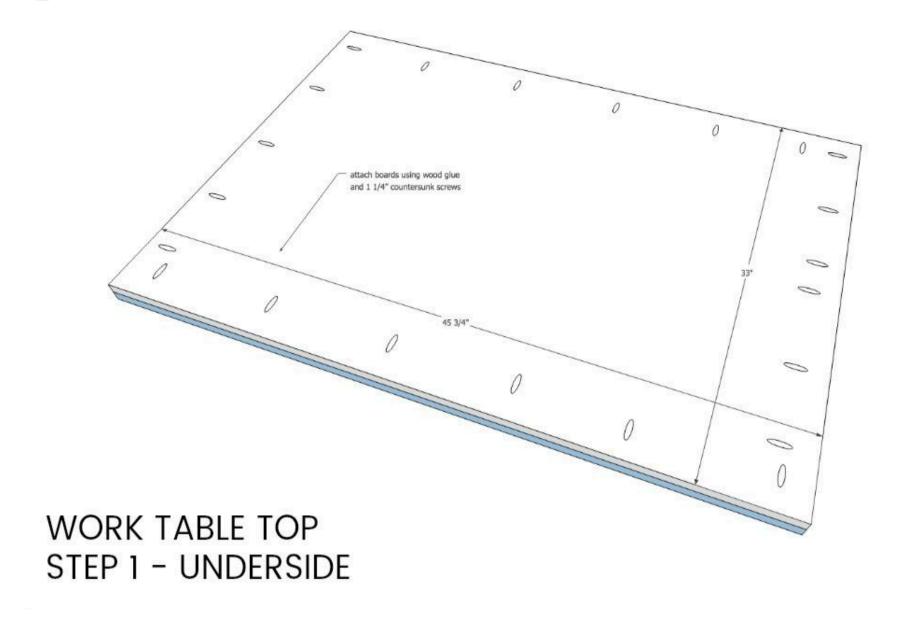

21

Top Step 2

Step 2: Attach center divider using wood glue and 2" pocket hole screws.

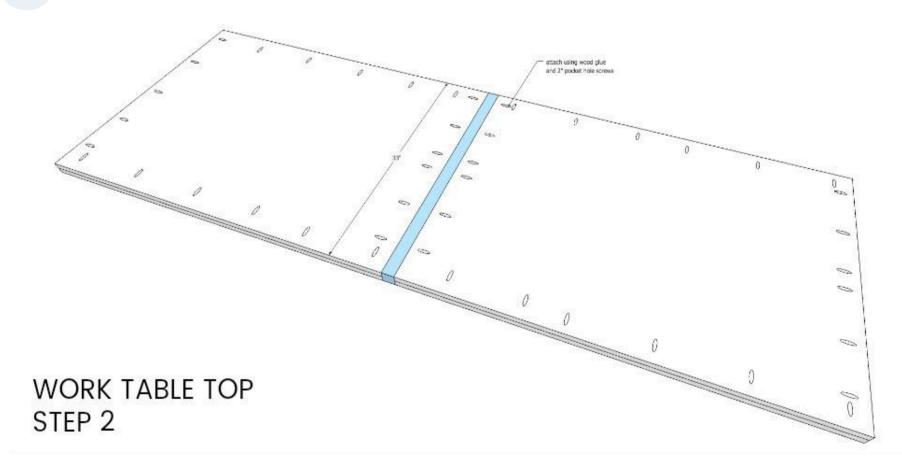






Top Step 3

Step 3: Attach side pieces using 1 1/4" pocket hole screws.

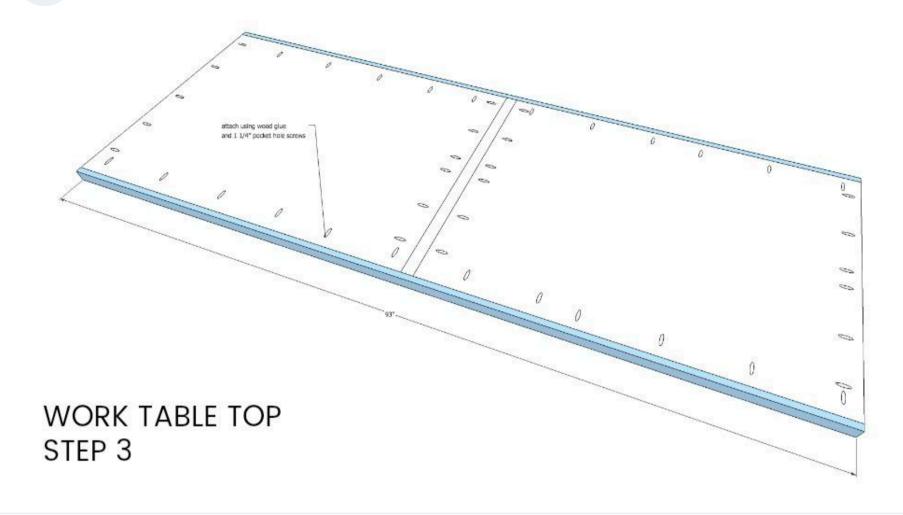



Top Step 4

Step 4: Attach ends to top using 2" pocket hole screws.

Center table top onto base and attach using corner braces or steel angles.

