

Table Saw Outfeed Table with Storage Cabinet

By **John Malecki**

Difficulty

Moderate

Build a simple tablesaw outfeed table using pocket holes, 2×4's , and plywood. This whole build is made using the KREG Foreman and KREG Hardware Installation products.



Tools

Kreg Tools

Kreg®
Pocket-Hole Jig [Kreg® Pocket-Hole Jig 720](#)
720

Cabinet
Hardware [Cabinet Hardware Jig](#)
Jig

Drawer
Slide Jig [Drawer Slide Jig](#)

Concealed
Hinge [Concealed Hinge Jig](#)
Jig

Other Tools

Jigsaw

Jointer

Miter Saw

Square

Table Saw

Tape Measure

Track Saw

Clamps

Drill (cordless)

Impact Driver

Nail Gun

Router

Air Compressor

Materials

Wood Products

1 Plywood , 3/4" Thick , Full Sheet

1 Plywood , 3/4" Thick , Half Sheet

12 Board , 2x4 , 96"

1 Melamine , 3/4" Thick , Full Sheet

Hardware & Supplies


2 Pairs 15" Ball Bearing Drawer Slides


2 Sets Inset European Drawer Hinges



4 Door Handles

Cut List & Parts

- 8 Legs , 33 1/8" X 2 1/2" X 1 1/4"
- 4 Long Stretchers , 39 1/2" X 2 1/2" X 1 1/4"
- 4 Short Stretchers , 19 1/2" X 2 1/2" X 1 1/4"
- 1 Cabinet Parts , See Diagram

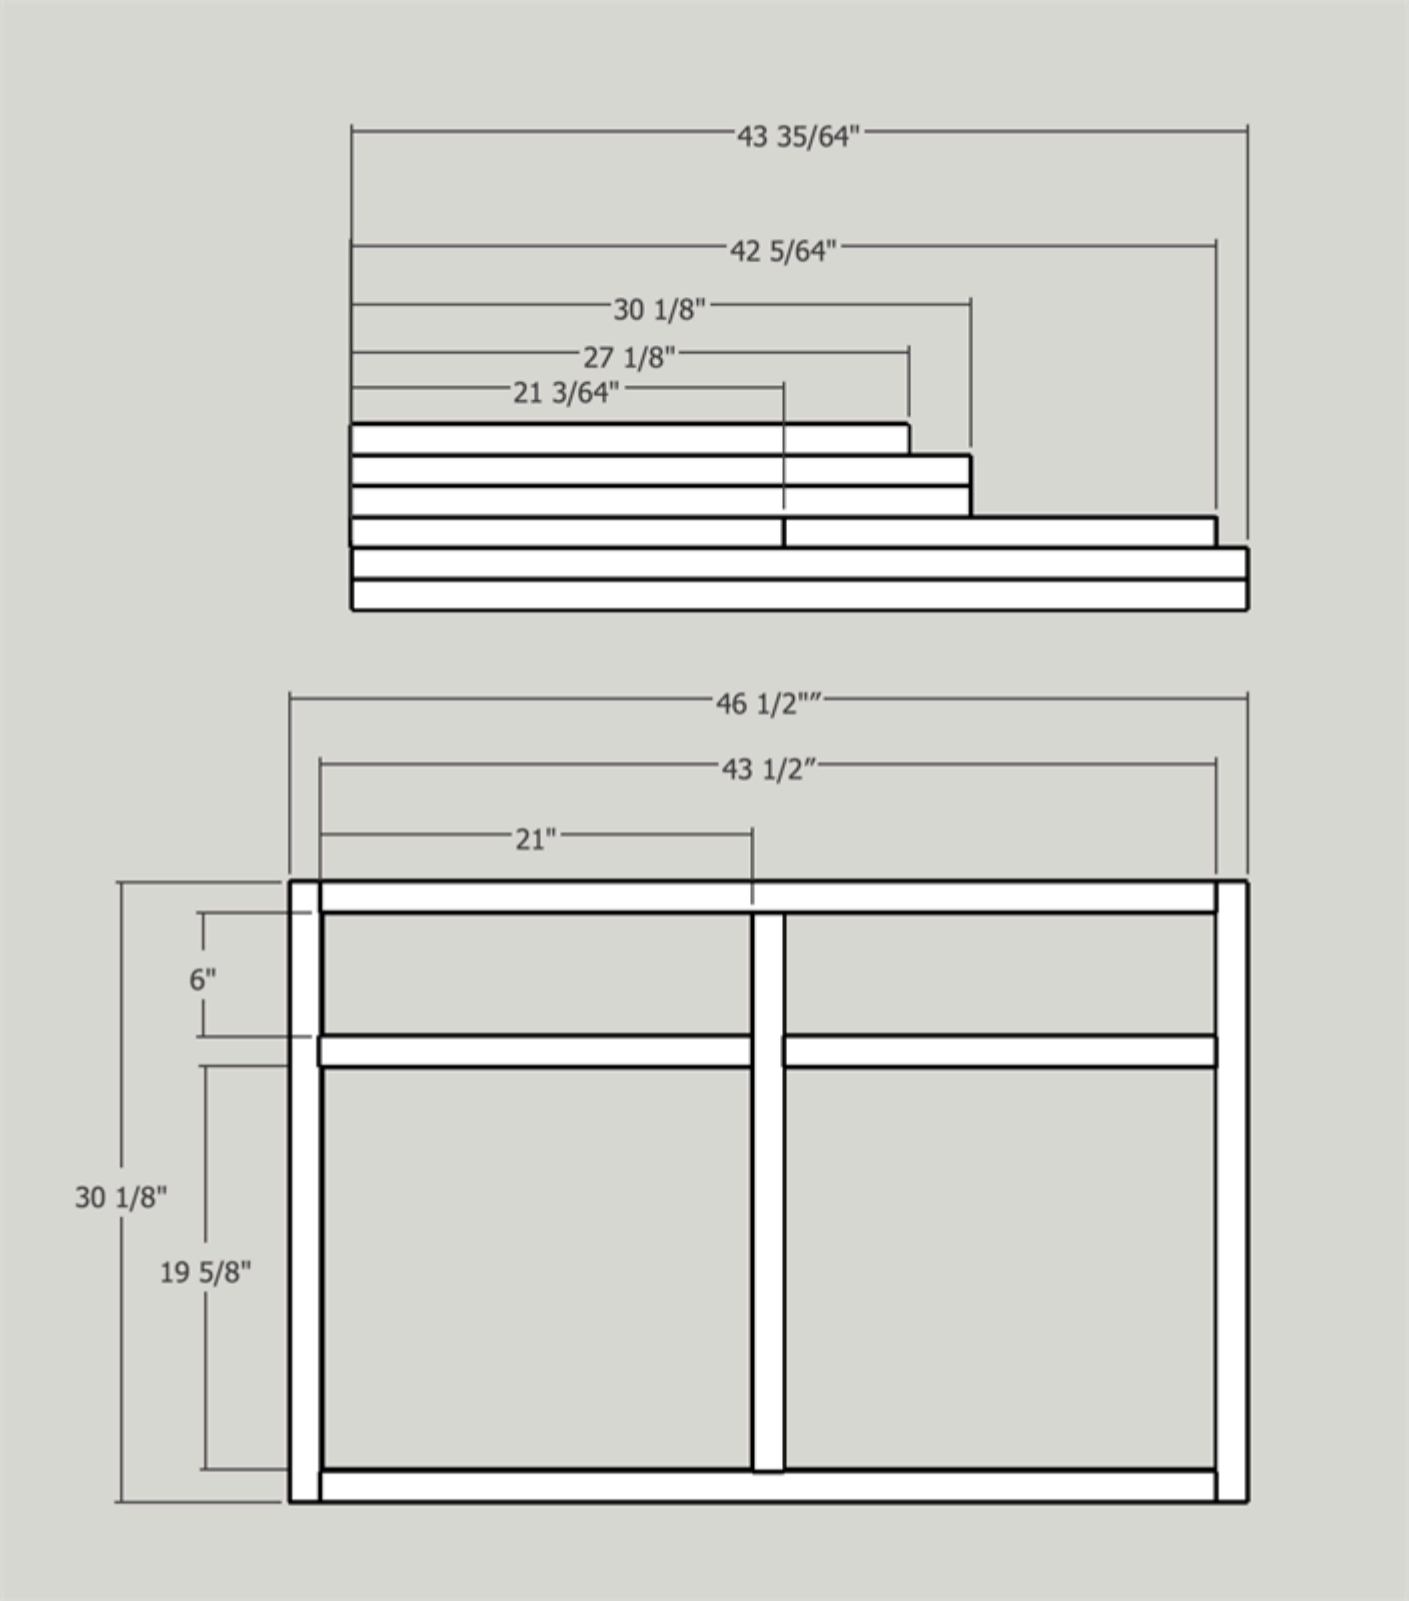

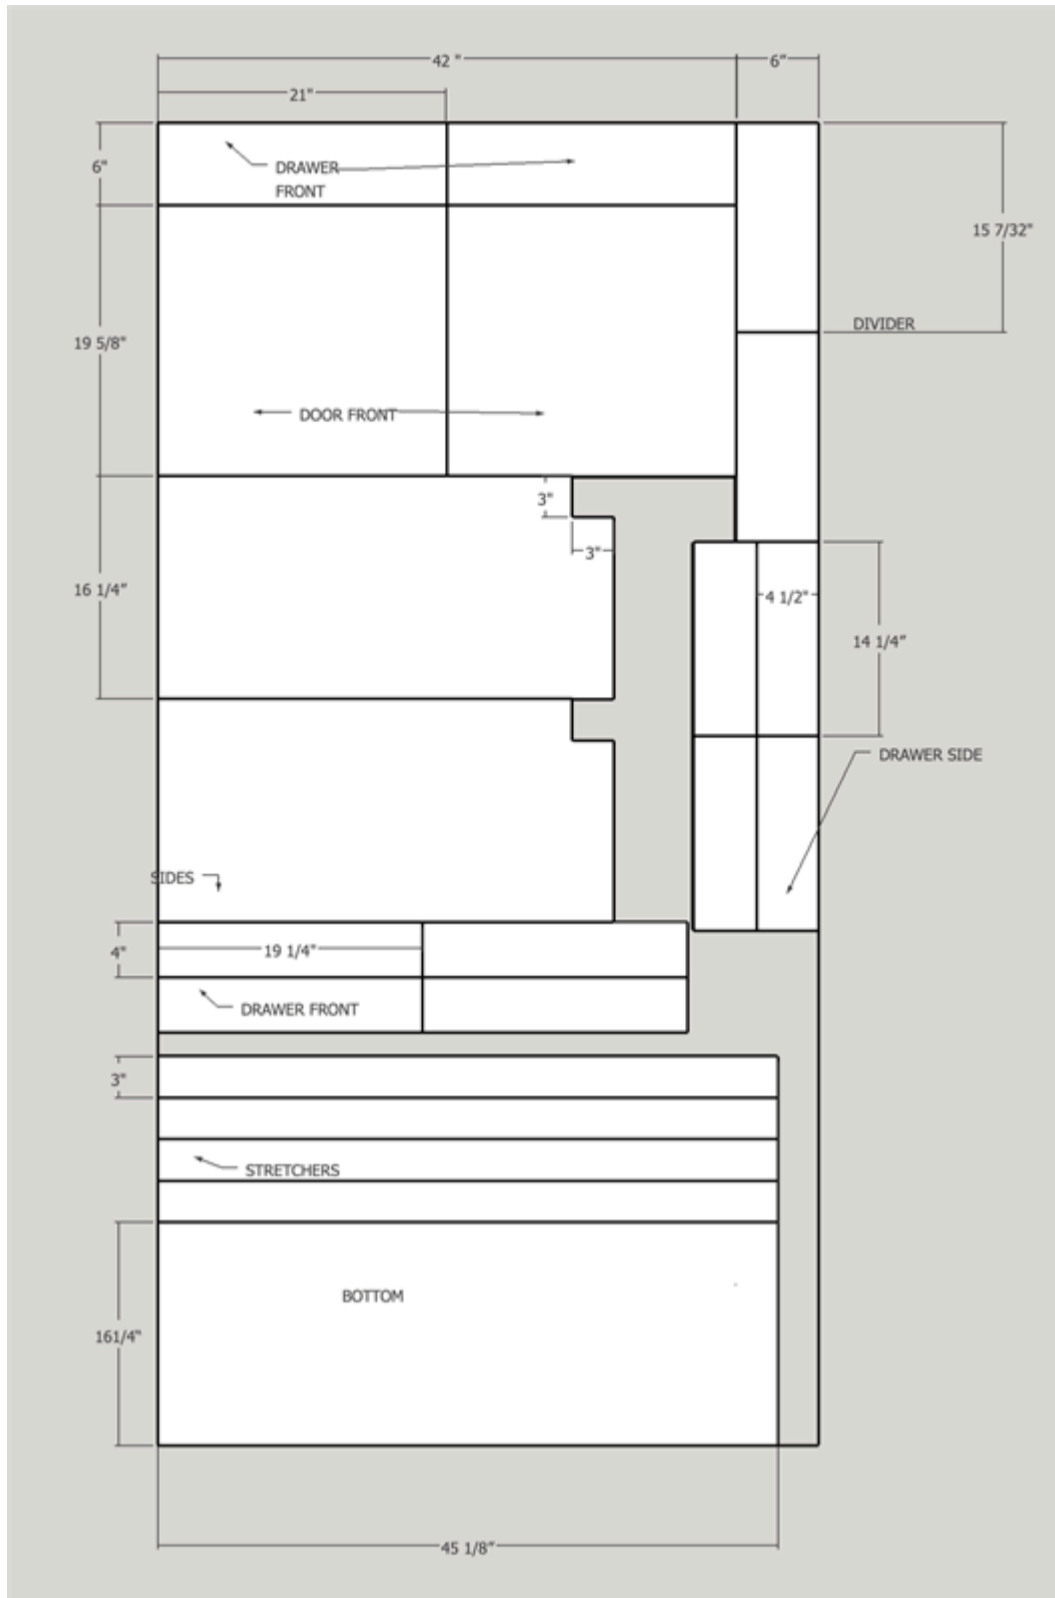

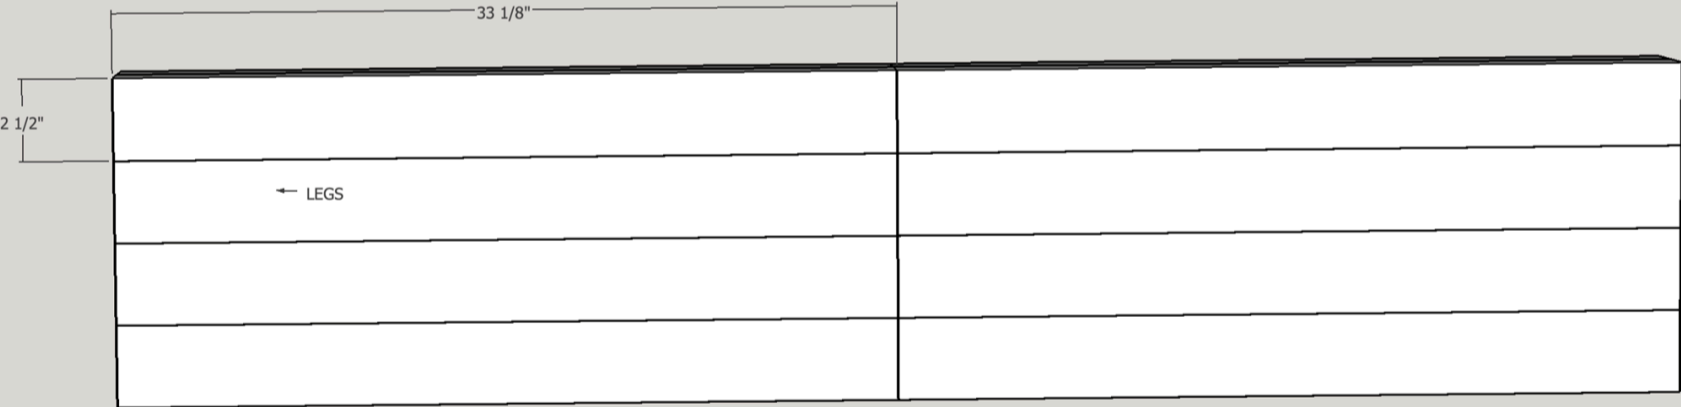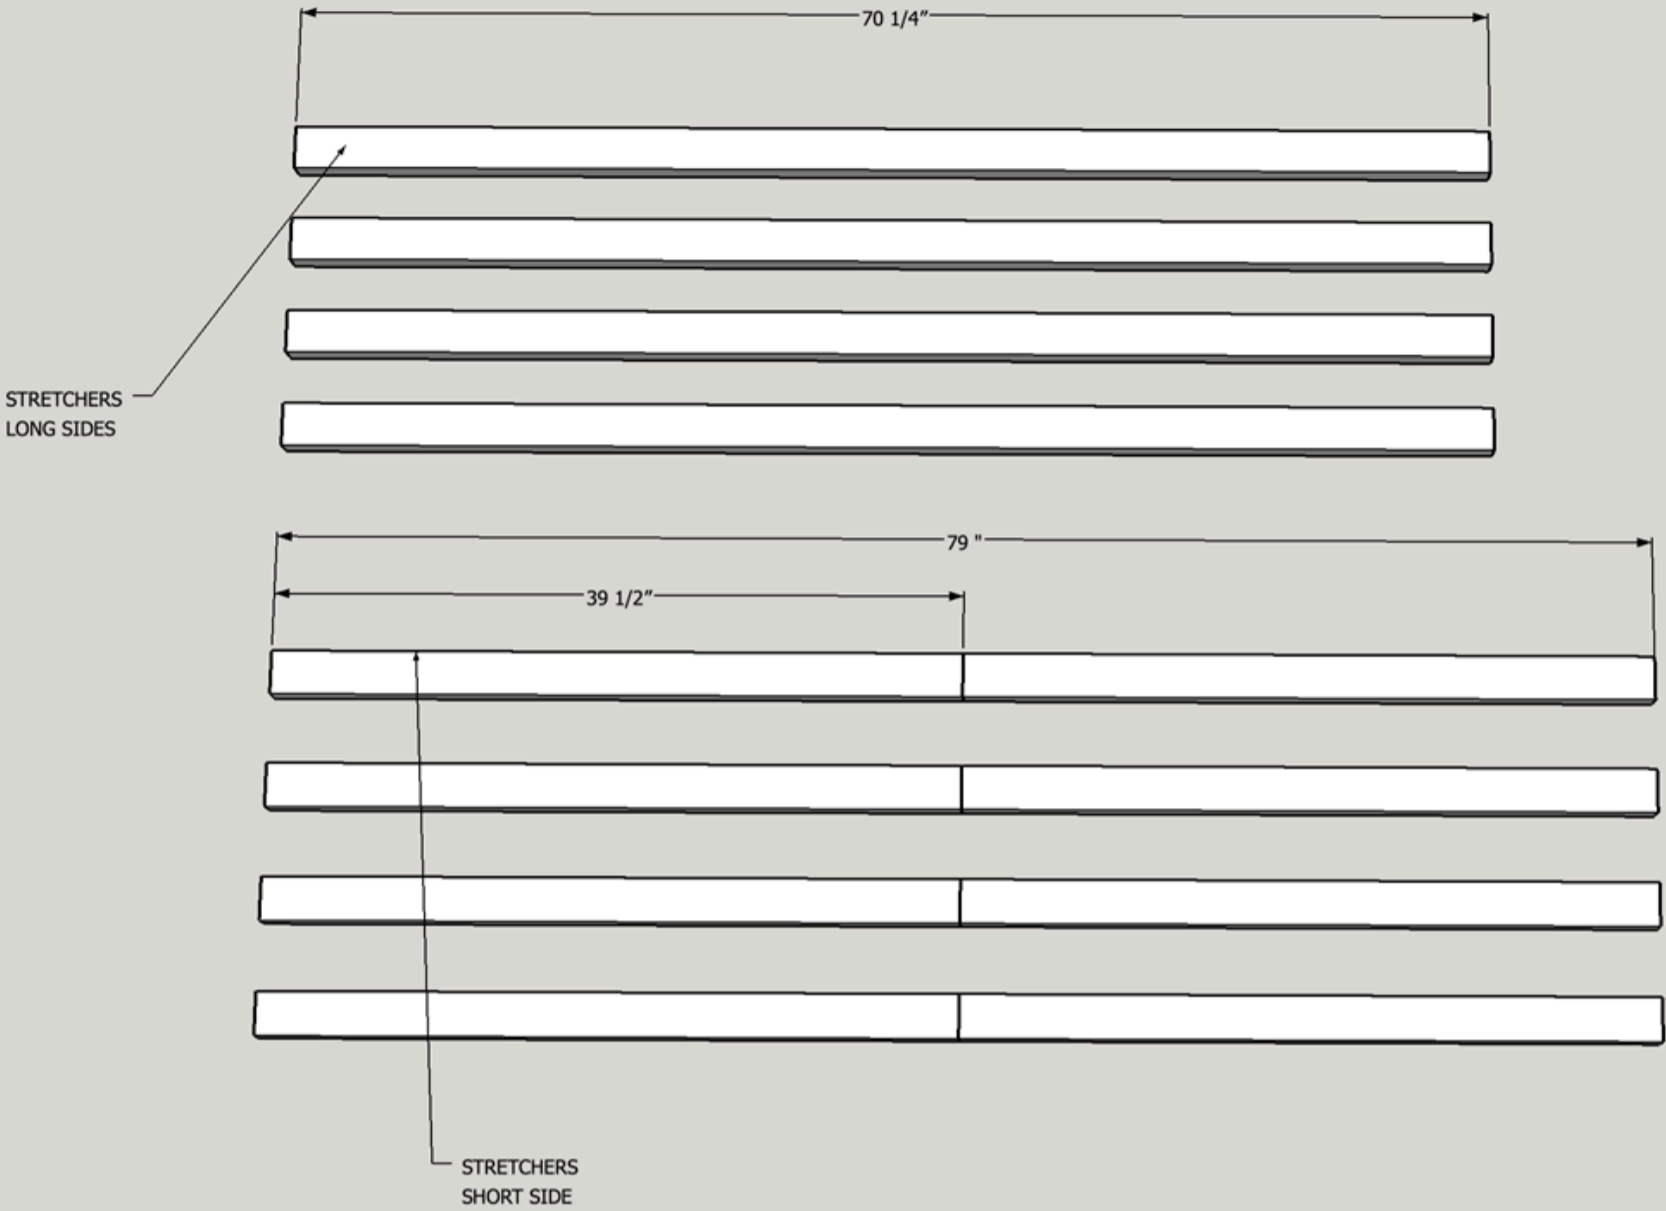

Directions

1

Material List

For this Project you will need the following

Materials

- (12) 2" x 4" x 8' Dimensioned lumber
- (2) 4' x 8' x 3/4" Plywood (Grade choice is up to you)
- Glue
- Pocket Hole Screws
- 1 1/4" 23g Pin Nails
- (1) 4' x 8' x 3/4" Melamine
- (2) Sets Drawer Slides
- (2) Sets Door Hinges
- (4) Door/ Drawer Pull Hardware

2

TABLE BUILD -Break Down Stock

- Begin breaking down your stock based on the height of your table saw and your flooring. Cut everything to rough length then final dimensions later
- Mill down 2x4 stock to 1 1/4" x 2 1/2"



3

Glue Up Legs


- Glue up legs (Make same height of table saw and cut to final length after)



4

Dimension Stretchers

- Cut all stretchers to the length in the diagram

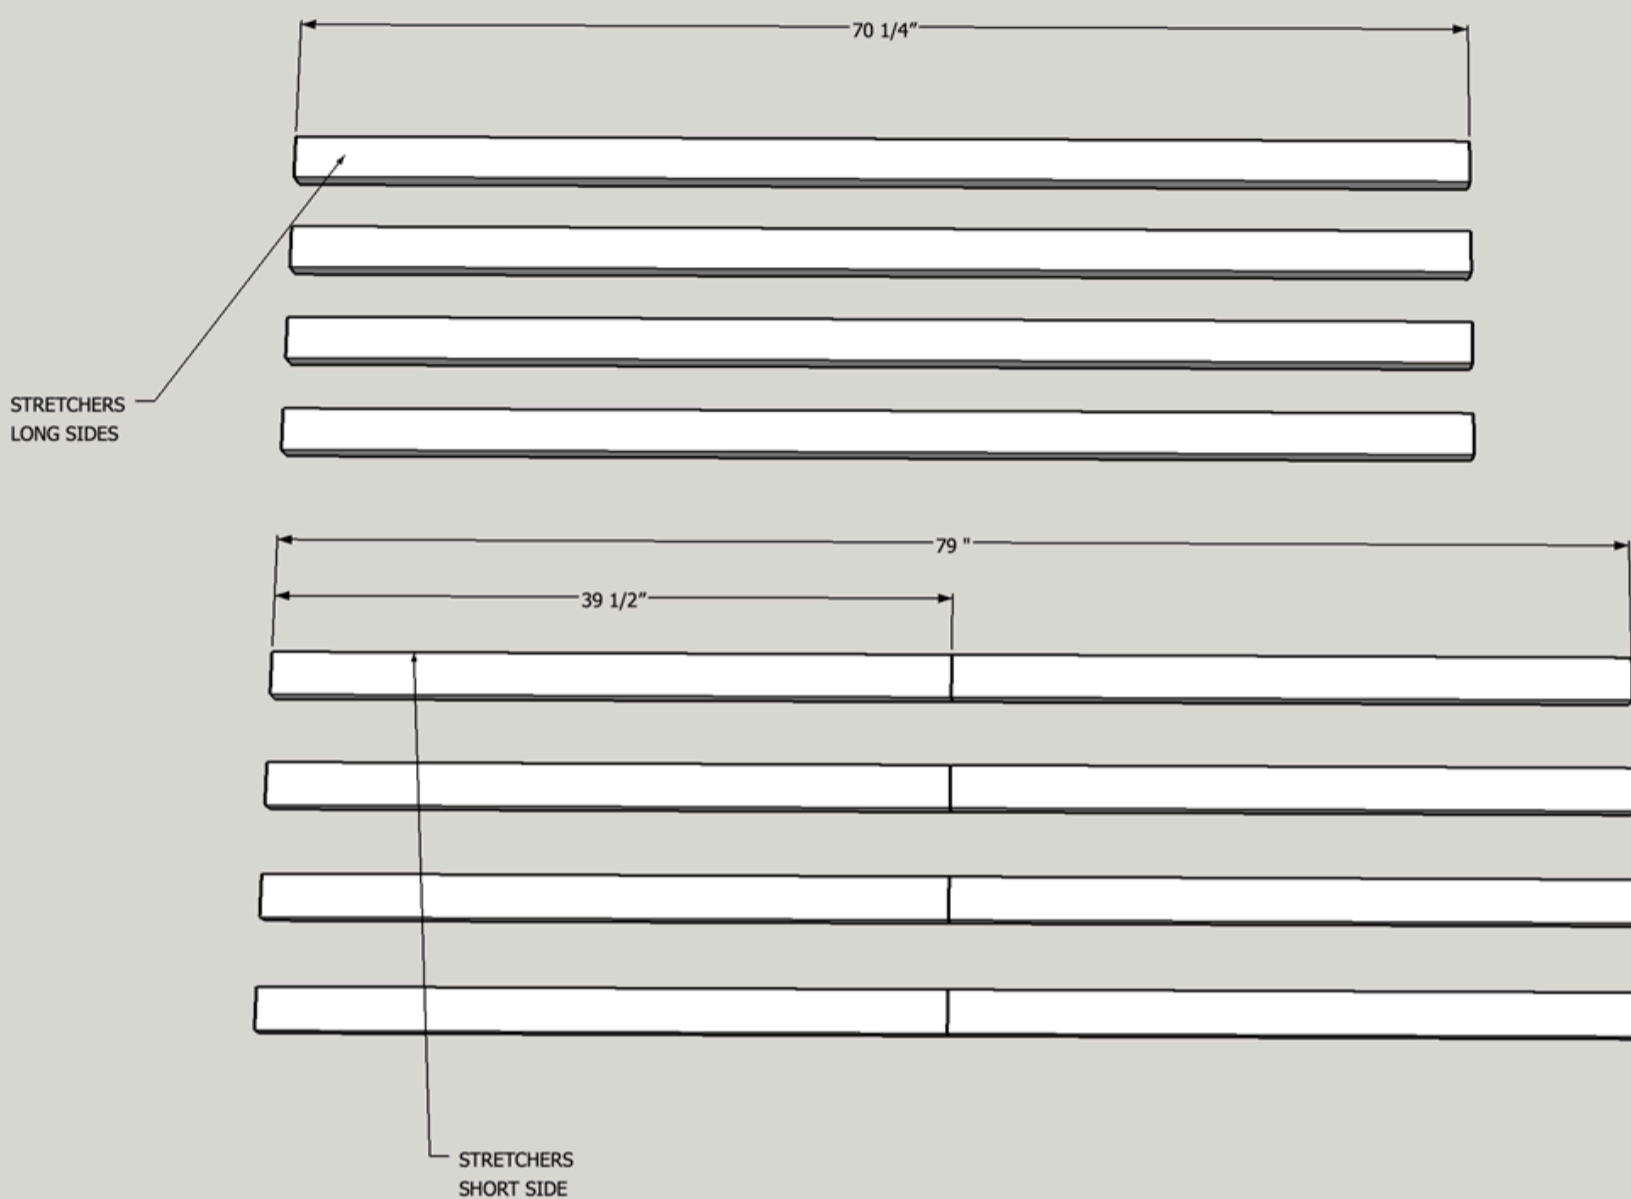

5**Pocket Hole Stretchers**

- Pocket Hole Stretchers using KREG Foreman.
- Adjust Foreman for a deeper pocket hole than 1"



6**Cut Legs and Attach Stretchers**

- Cut table legs to final dimension (add adjustable feet if floor is uneven)
- Cut to 1" lower than table top height for addition of top thickness
- Attach Stretchers using Pocket Hole Screws and glue
- Use a 4" spacer block on the bottom for shelf height



7

Add Cross Bracing

- Add cross bracing in between long stretchers
- Cross bracing dimensions are on a project basis, measure the distance in between stretchers and cut to length.
- This can be any dimensioned stock or scrap wood in shop (I used old 2x3's cut to 41 1/2")



8


Add Corner Gussets

- Using left over scrap from stretchers, cut 45° corner braces to whichever length you desire
- Add Pocket Holes and Attach with glue and screws



9**CABINET BUILD - Break Down Ply**

- Break down sheet goods into dimensioned parts
 - I use a track saw and table saw for final dimensions
 - recommend cutting from 2 sheets but can be done with 1 and leftover shop scraps for face frame
-

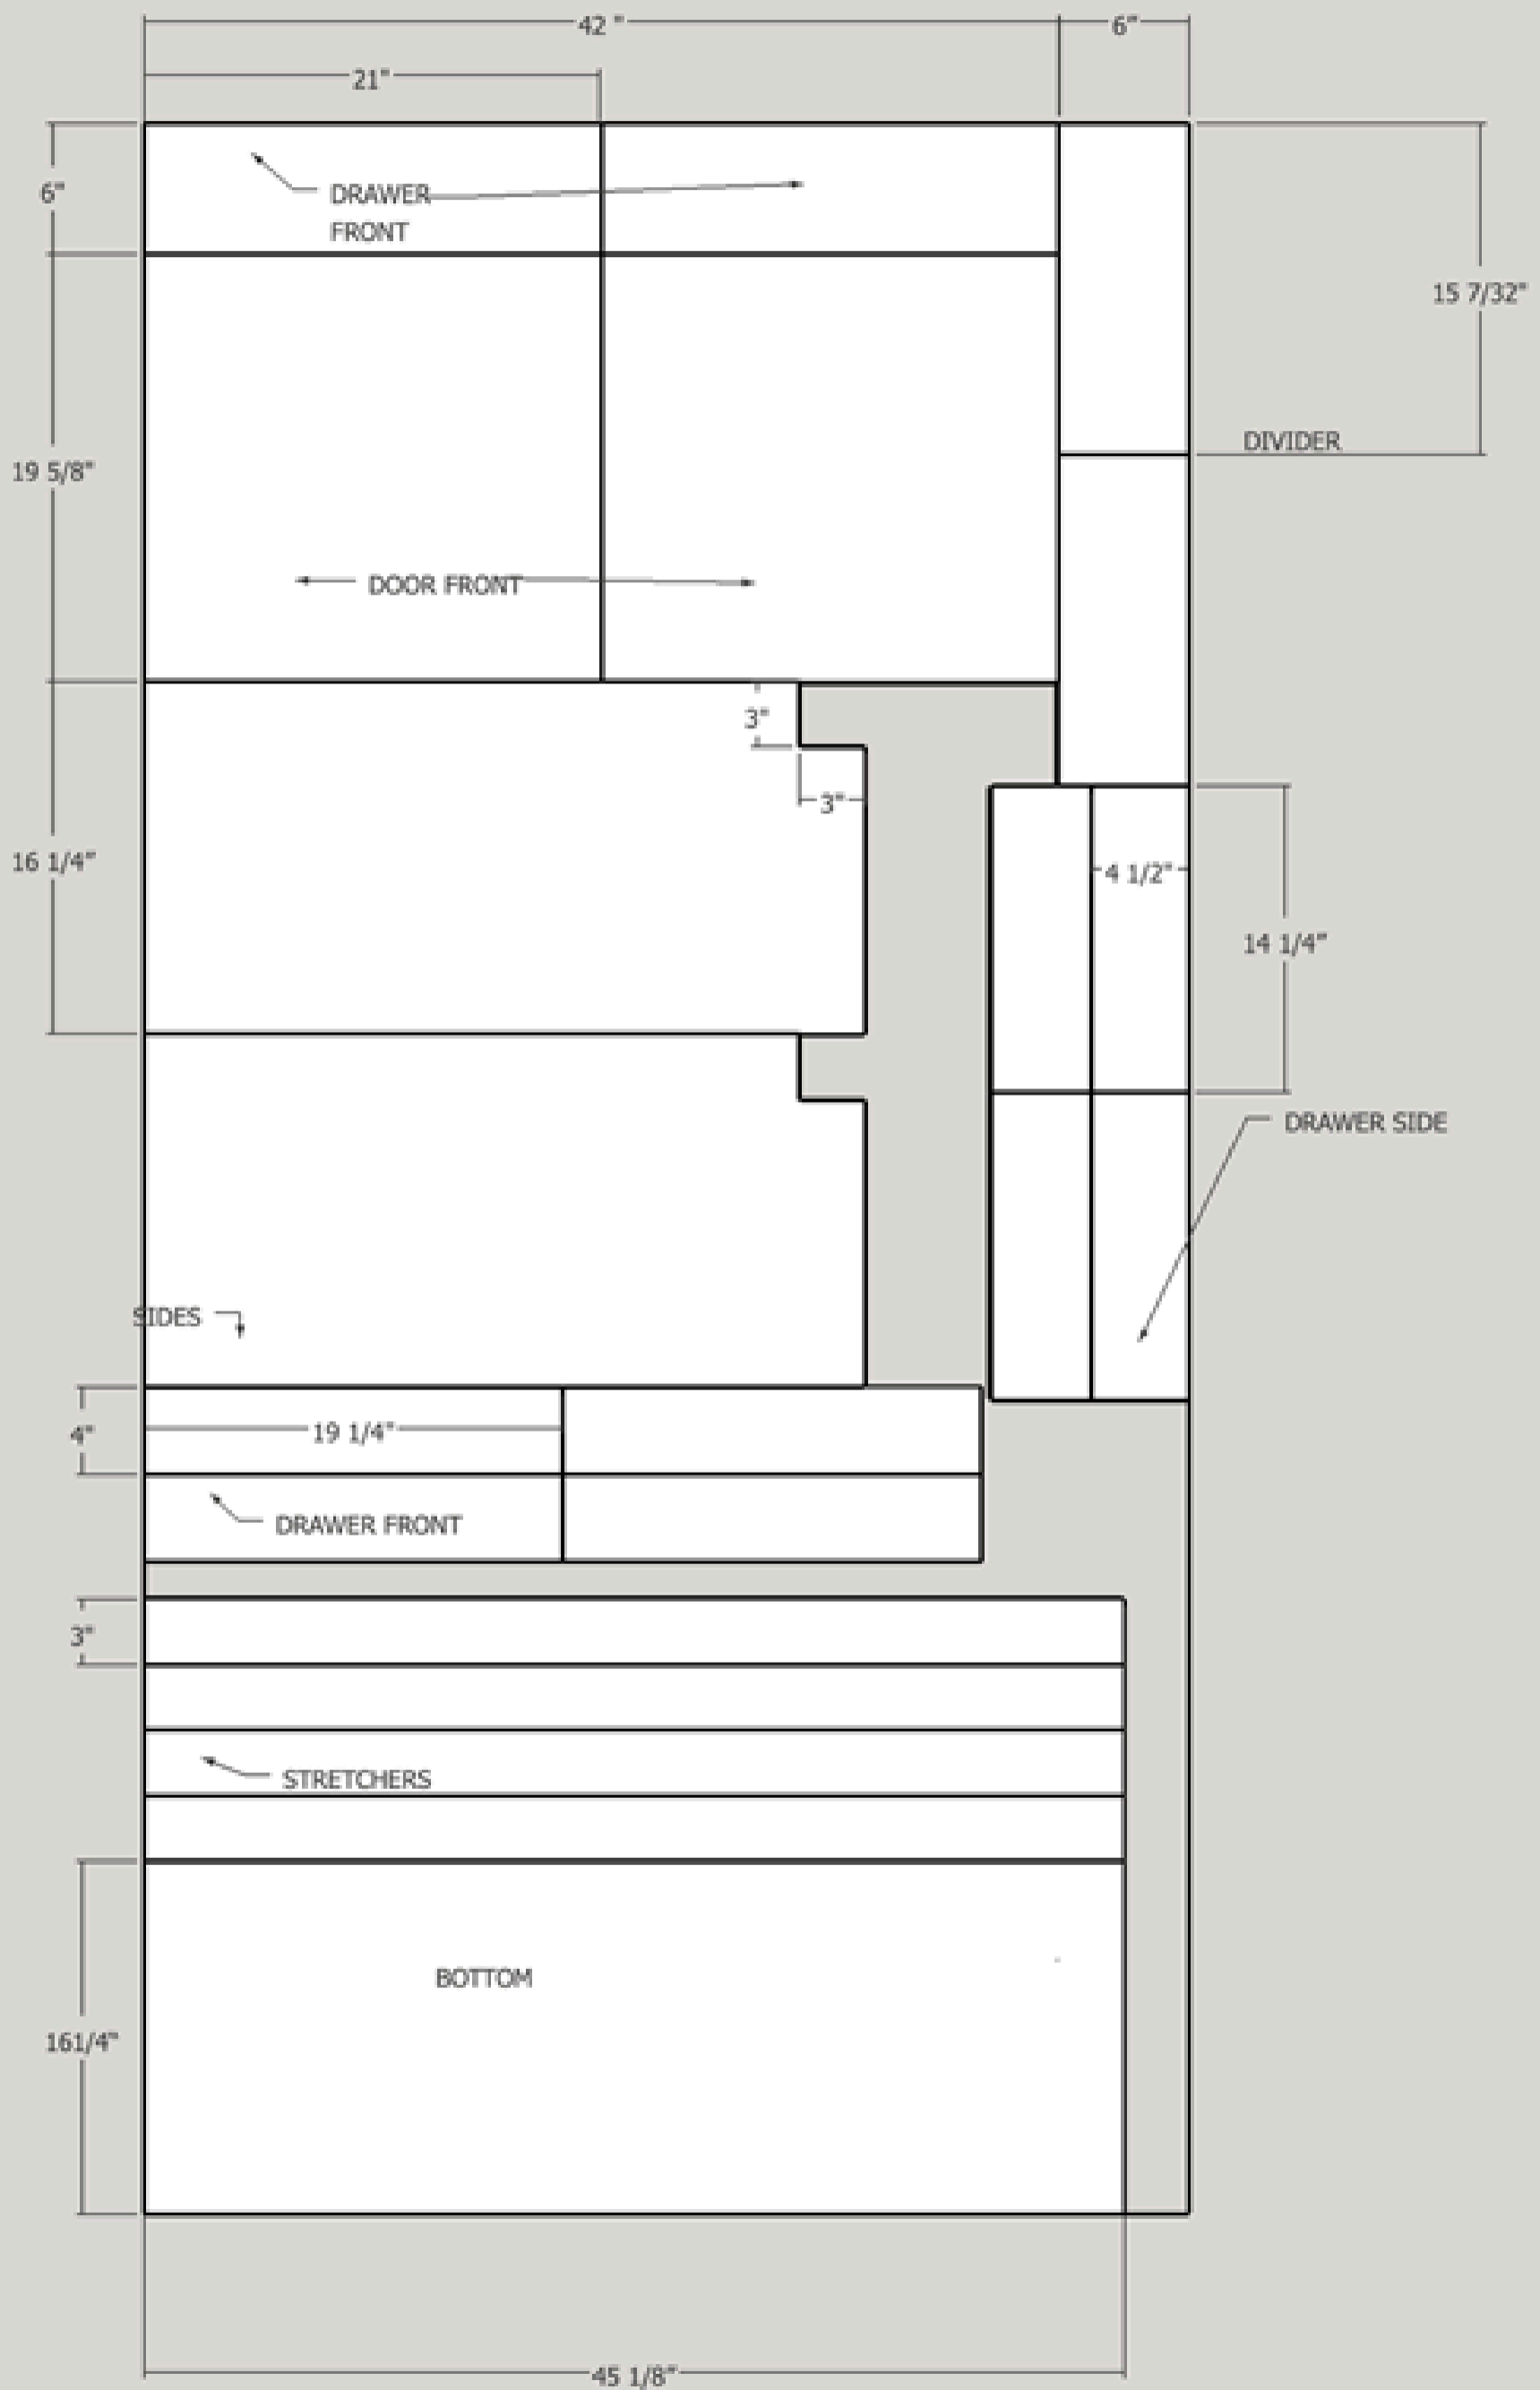

10**Pocket Hole Stretchers**

- Pocket Hole stretchers.
- Add one stretcher to the toe kick
- add one stretcher to the top front (Flush with top of box)
- add stretchers to back (top and bottom flush with back)
- Cut 3" x 3" toe kick into sides with jigsaw


BOTTOM SHELF WILL SIT ON TOP OF STRETCHERS, BE SURE TO HAVE TOE KICK STRETCHER AND BOTTOM BACK STRETCHER ON CABINET BOTTOM WITH POCKET HOLES FACING IN



11

Cut and Glue Face Frame

- Using scrap hardwood or scrap plywood (or second sheet of plywood) cut and assemble face frame based on diagram.

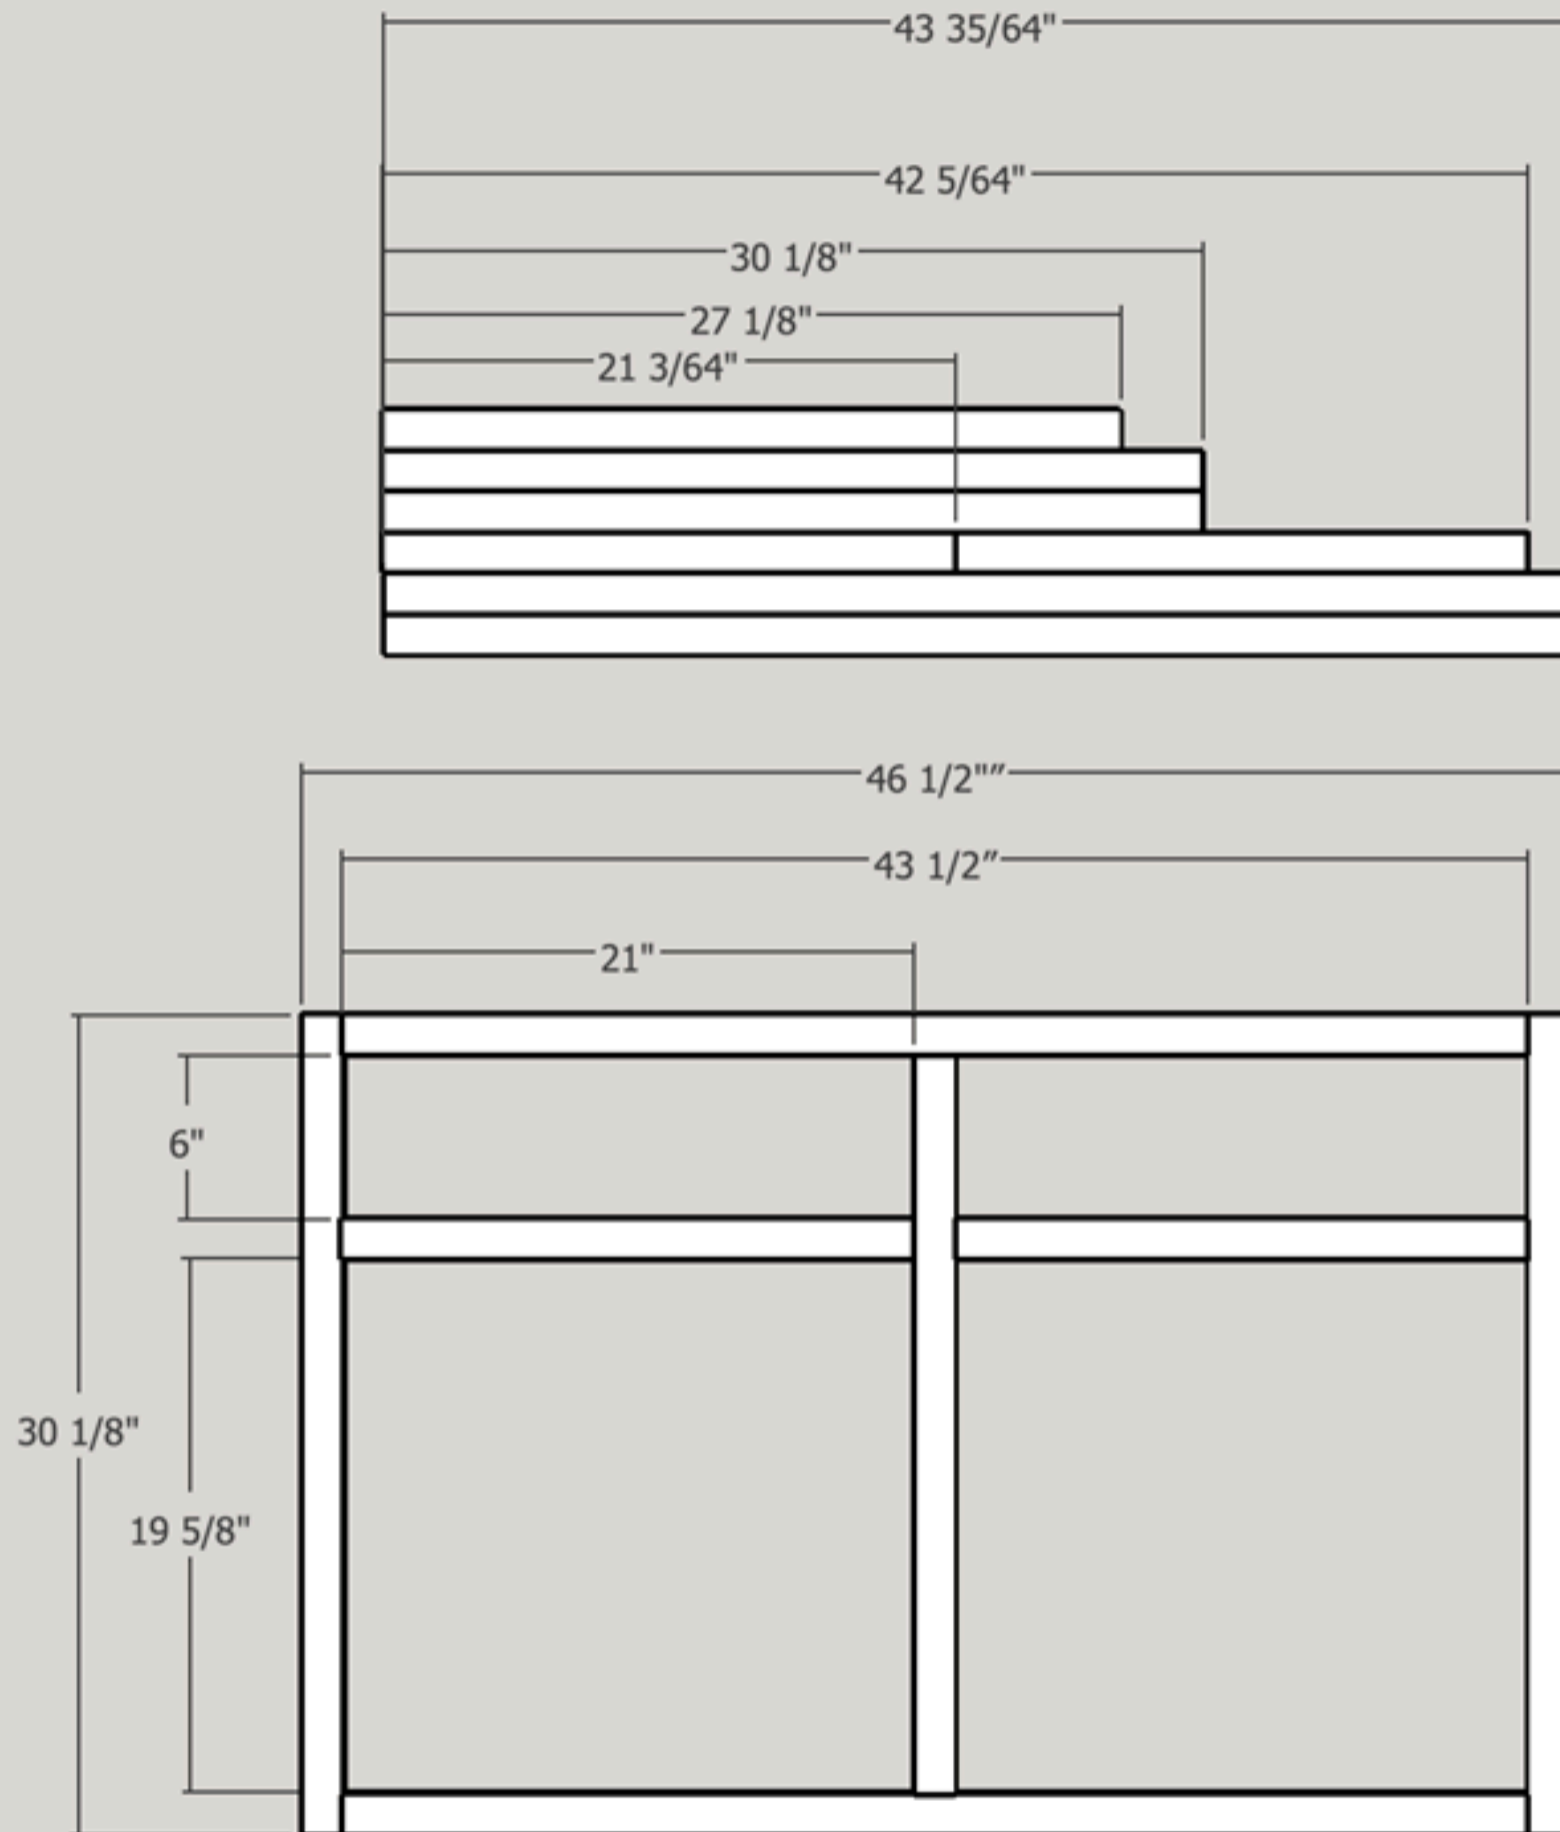

12

Insert Bottom

- Insert cabinet bottom on top of stretchers.
- Apply glue and mark from top.
- Nail bottom into place

NOTE: Measure box interior, minor changes may affect precut size of bottom



13**Attach Divider**

- Attach center divider for drawer slides with pocket holes in back and screws from top down front stretcher



14

Attach Face Frame

- Attach Face Frame with 1 1/4" 23g pin nails and glue



15**Cut Dados In Drawers**

- Cut 1/2" Dado inset 1/4" from bottom of drawer sides and front
- pocket hole drawer sides

NOTE: Cut drawer backs 1/2" to allow bottom panel to slide in and screw from back



16**Assemble Drawers**

- Assemble drawers with pocket holes on front and back
- Face pocket holes out
- Insert Bottom into dados

- In photo you can see pocket holes facing out, bottom panel is slid in and attached with 2 screws from the bottom into the drawer back (the one you cut 1/2" short)

NOTE : Drawer box dimensions may change depending on slides. Typical Ball Bearing slides need 1" of total clearance (1/2" each side) so make drawer box width 1" short of face frame width



17**Attach Slides**

- Using a flat surface and fully assembled slide, attach to drawer box.



18**Attach Slides To Cabinet**

- Using KREG Drawer Slide Jig attach slides to cabinet box.
- Insert drawer box, adjust accordingly

NOTE: You may need to shim out the interior of the cabinet box so the drawer slides are flush with the inside of the face frame. use scraps or whatever is lying around, glue and brads work



19**Drill and Mount Door Hardware**

- Using KREG concealed hinge jig, mount hardware to doors.
- Install doors in cabinet box



20

Install Pulls and Hardware

- Using KREG Cabinet Hardware Jig , Mount drawer and door handles



21**Add Top**

- Cut Melamine top to size and attach from bottom.
- Should span from the cabinet all the way to table saw
- If cut tall, use router to create mitre gauge slots
- Round over edges on melamine and finish with 220 grit sandpaper

