


DIY Mobile Potting Bench Cart

Difficulty

Easy

This DIY mobile potting bench is the perfect addition to your garden, porch, or patio! Build this adorable cart to display your plants, store your supplies, and give you a work surface to repot all your favorite indoor and outdoor plants. Or, use it as a serving cart for your outdoor gatherings!



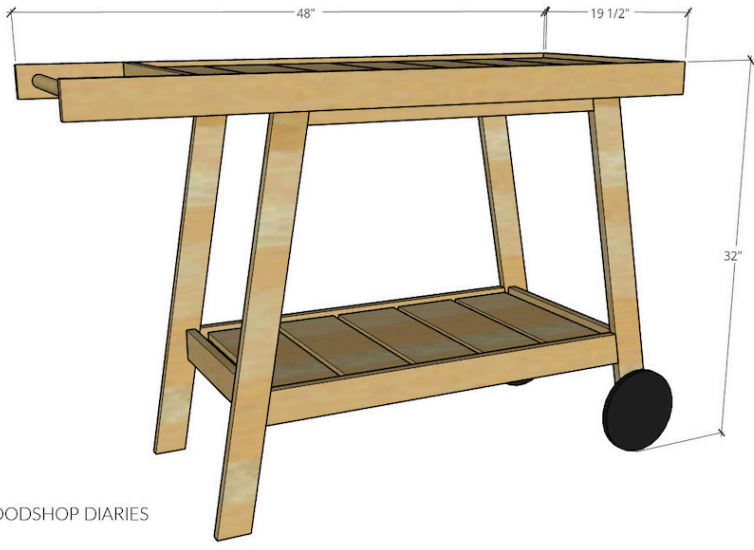

WOODSHOP DIARIES

Tools

Kreg Tools



[Kreg® Pocket-Hole Jig 720PRO](#)



[Zinc Pocket-Hole Screws](#)

Other Tools

Drill/Driver

Miter Saw

18 ga Nail Gun

Level

Materials

Wood Products

- 5** Boards , 1x3x8
- 1** Boards , 1x2x8
- 3** Boards , 1x6x8
- 1** Dowel Rod , 1" (18" Long)

Hardware & Supplies

- 1** Box Of 1 ¼" Kreg Pocket Hole Screws (See Tools List)
- 2** 7" Plastic Wheels (Or Cut Wooden Wheels)
- 2** 2 1/2" Long Bolts + Nuts To Attach Wheels
- 1** Box Of 1 ¼" Wood Screws
- 1** Box Of 2" Wood Screws
- 1** Box Of Brad Nails
- 1** Wood Glue

Cut List & Parts

- 2** Boards- Long Frame Legs , 1x3 @ 31 ½" Long (Ends Mitered 10° Parallel To Each Other)
- 2** Boards- Short Frame Legs , 1x3 @ 29 ½" Long (Ends Mitered 10° Parallel To Each Other)
- 2** Boards- Side Frame Tops , 1x3 @ 23 ¾" Long (Ends Mitered 10° NOT Parallel To Each Other)
- 2** Boards- Side Frame Bottoms , 1x3 @ 31 1/8" Long (Ends Mitered 10° NOT Parallel To Each Other)
- 2** Boards- Bottom Shelf Sides , 1x3 @ 16 ½" Long
- 2** Boards- Top Tray Front/Back , 1x3 @ 48" Long
- 2** Boards- Top Tray Sides , 1x3 @ 18" Long
- 2** Boards- Bottom Tray Slat Supports , 1x2 @ 30" Long
- 4** Boards- Top Tray Slat Supports , 1x2 @ 5" Long
- 1** Dowel- Handle , 1" Rod @ 18"
- 5** Boards- Bottom Slats , 1x6 @ 16 ¼" Long
- 7** Boards- Top Slats , 1x6 @ 17 ¾" Long

Directions


1

Assemble Cart Sides

Cut 1x3 pieces like shown in the diagram. Notice there is one 29 1/2" long leg and one 31 1/2" long leg—both with ends mitered 10 degrees off square parallel to each other. Cut a piece of 1x3 with ends mitered 10 degrees NOT parallel to each other to 23 3/4" long at the longest point for the top and another to 31 1/8" long at the longest point for the bottom.

Assemble a side frame together like shown using 3/4" pocket holes and 1 1/4" Kreg pocket hole screws.


Cut and assemble a second frame the same way only mirrored to this one—build one with the short leg on the left and one with the short leg on the right so that when put together in the next step, the pocket holes all face the inside.

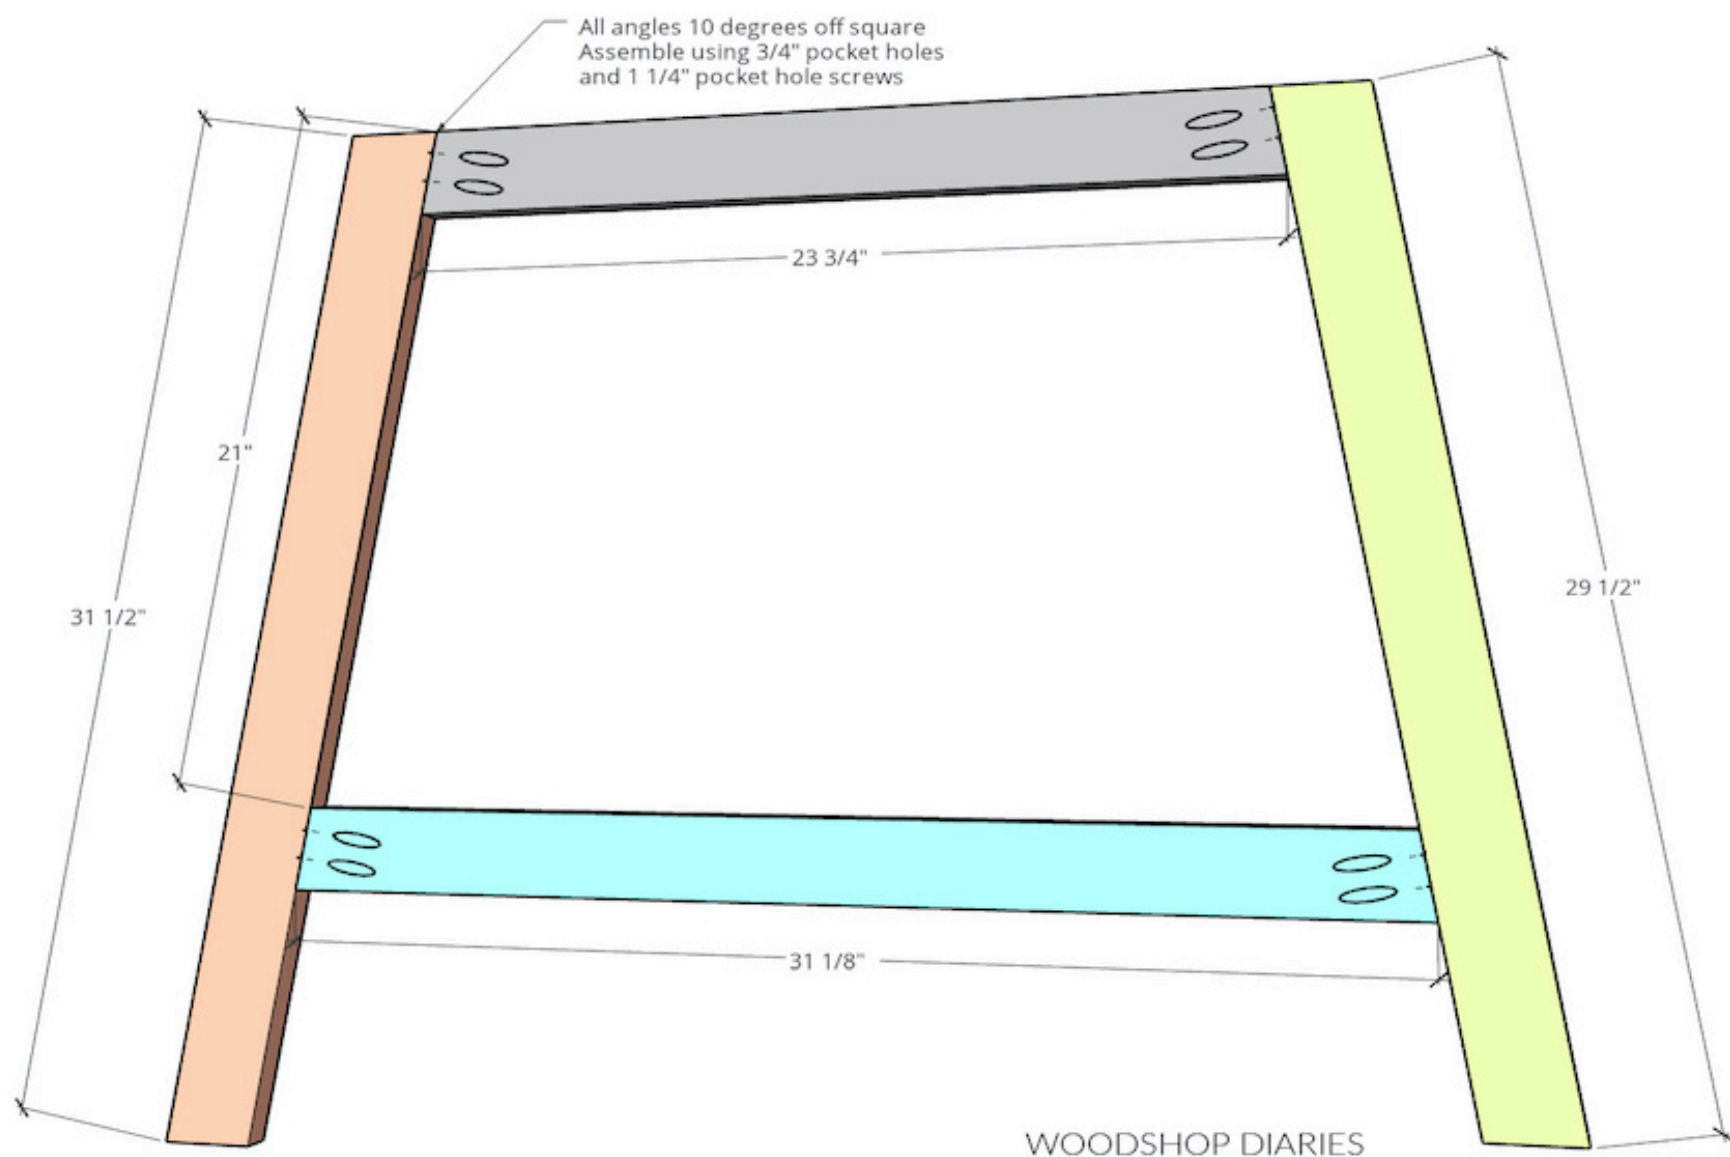

2

Install Bottom Shelf Sides

Cut (2) 1x3 boards to 16 1/2" long and drill 3/4" pocket holes into the ends of each. Assemble like shown using 1 1/4" Kreg pocket hole screws (Blue Kote if using outdoors) between the two side frames so that they are flush to the inside corner and level to the bottom pieces on the frames. Install these straight up and down (square to the floor), but don't worry if they're perfect.

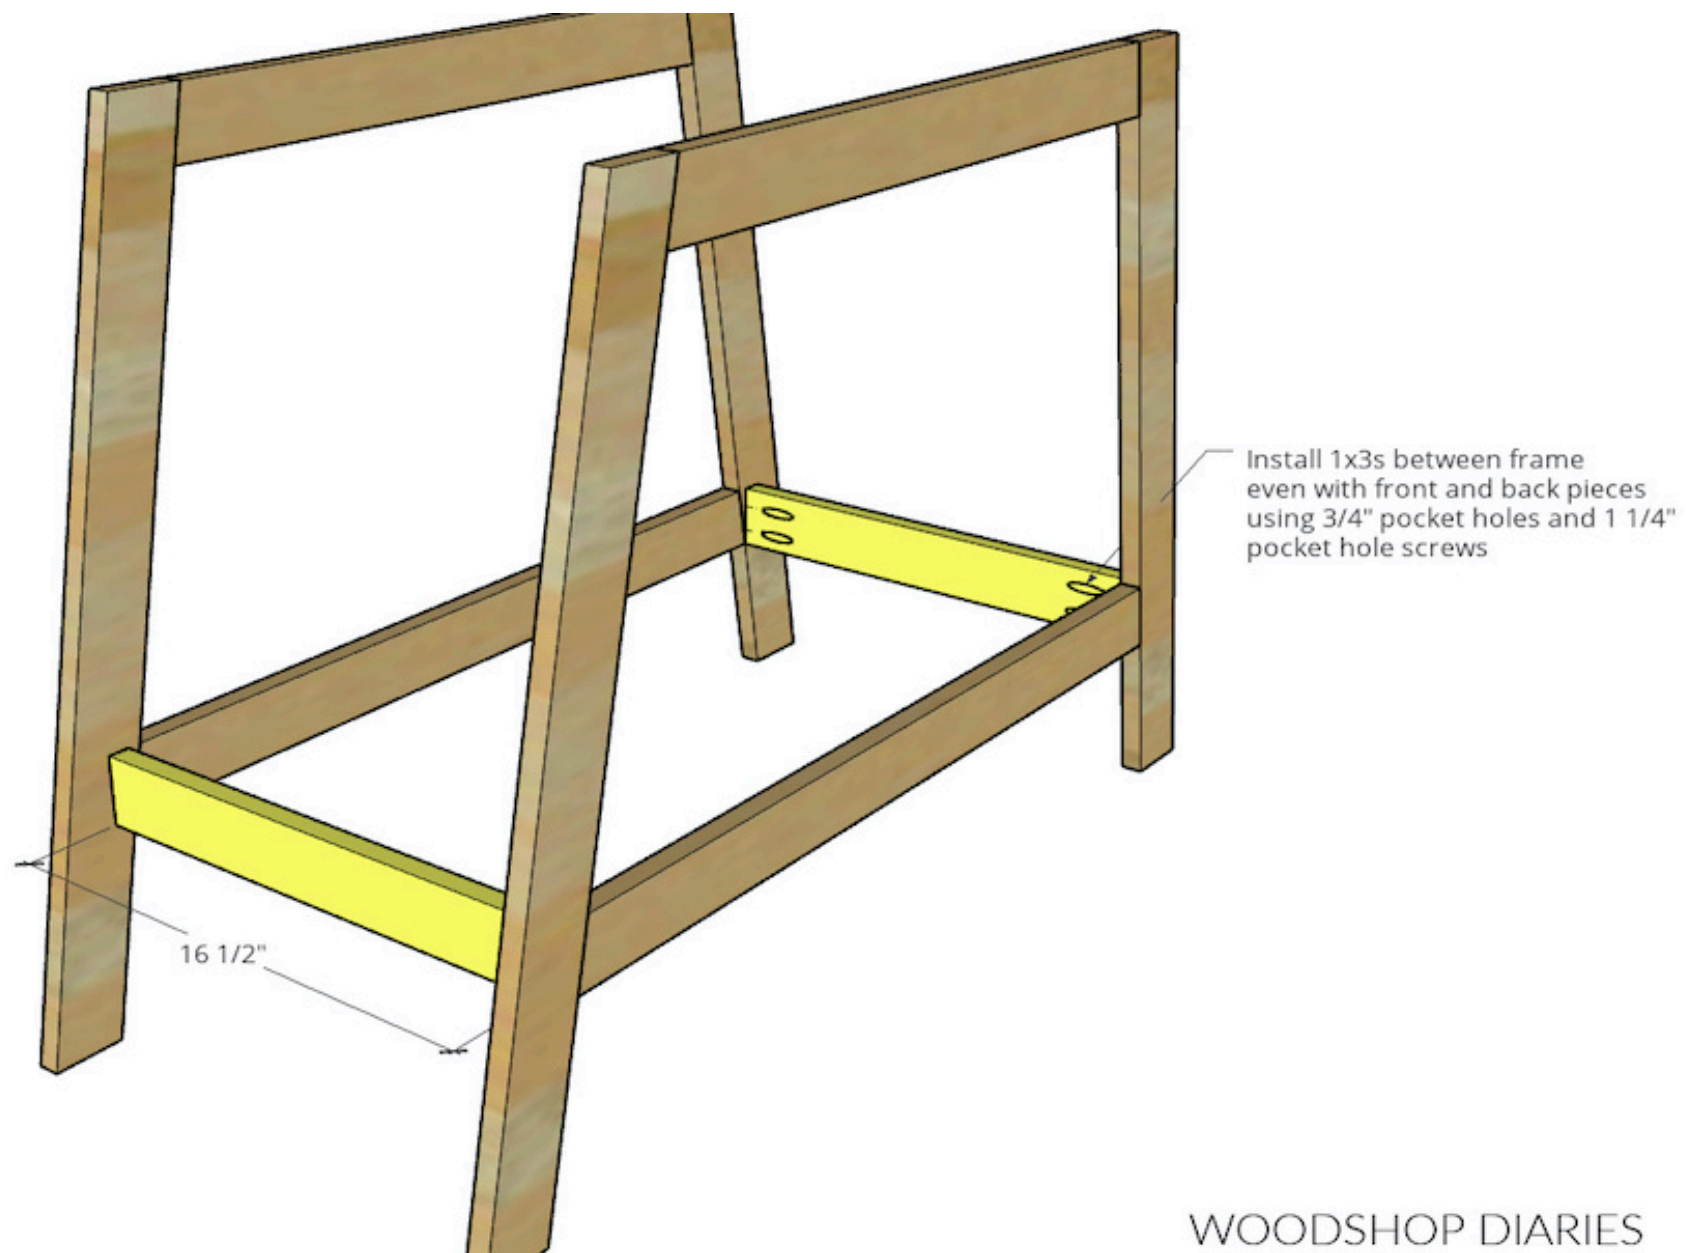


WOODSHOP DIARIES

3

Assemble Top Shelf Tray

Cut 1x3s like shown and assemble a tray using $\frac{3}{4}$ " pocket holes and $1\frac{1}{4}$ " Kreg pocket hole screws (Blue Kote if using outdoors).

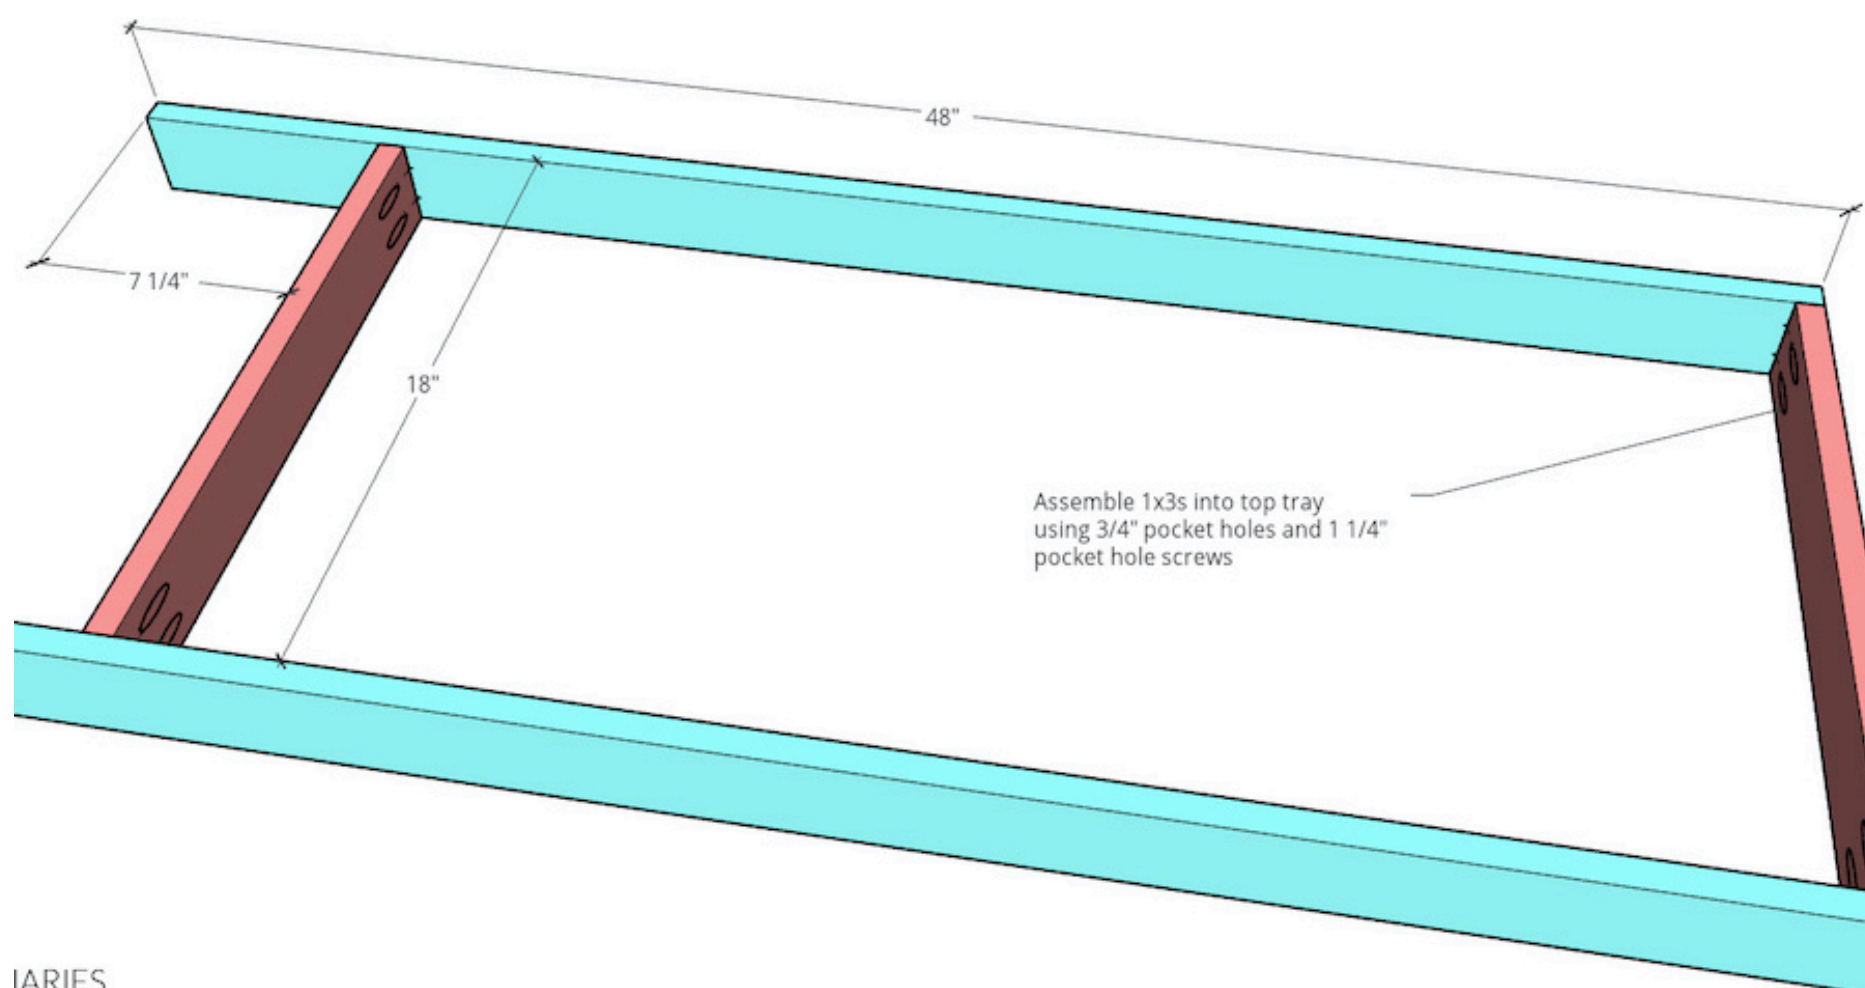


VARIES

4

Add Top Tray to Frame

Install tray onto the top of the cart frame using 1 1/4" wood screws (exterior rated if using outdoors). Use 5 screws on each side and install so that the tray overlaps the frame by 1 1/2" and is centered side to side.


Predrill holes before driving screws to prevent wood splitting.

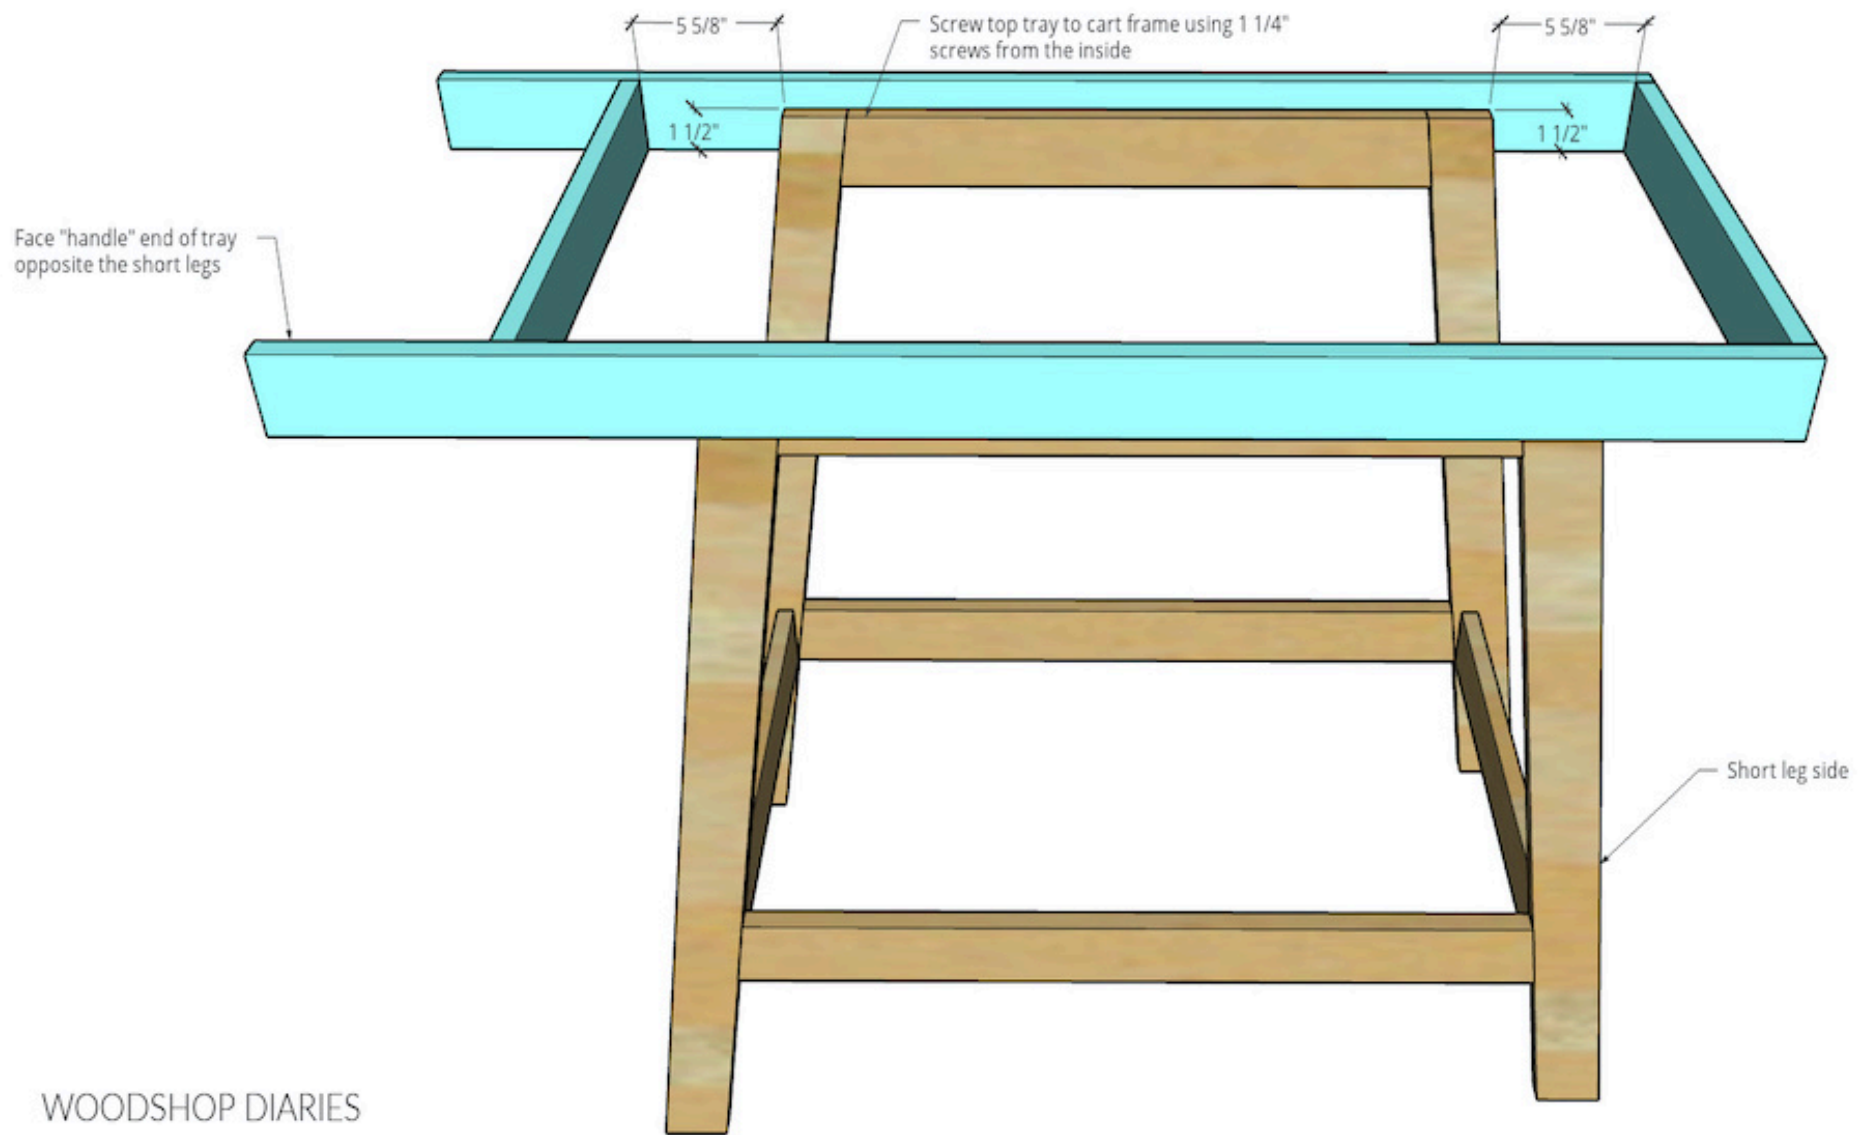

WOODSHOP DIARIES

5**Add Handle**

Cut a 1" dowel rod to 18" and install in the open section of the top tray as a handle. Use 2" or longer wood screws to install. It's not critical how high or how far in the handle goes, so feel free to install it anywhere in this opening.

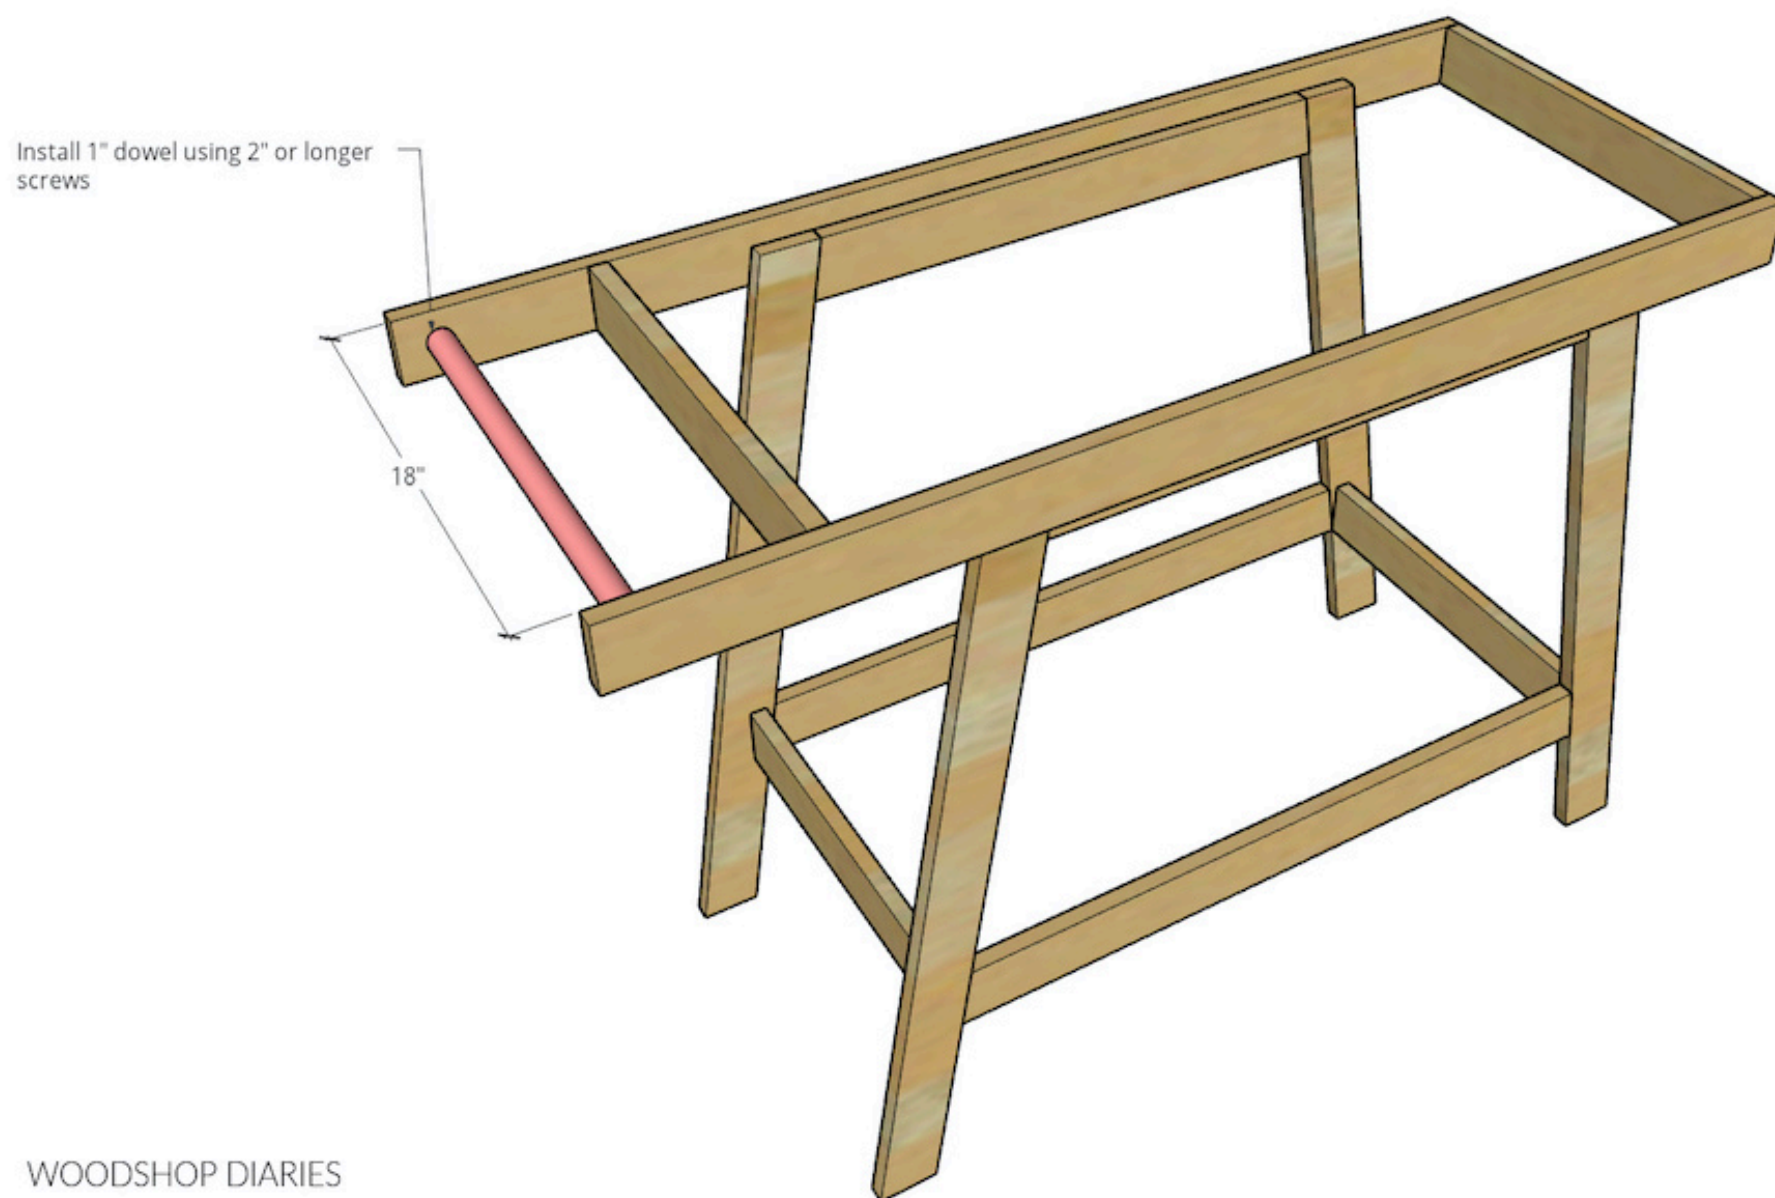


WOODSHOP DIARIES

6

Add Slat Supports

Cut (2) 30" long 1x2s to use as the slat supports at the bottom and (4) 5" long 1x2s to use as slat supports at the top.

Glue and either brad nail or screw these in place so that they are flush with the bottom of the frame pieces they are glued on—that way the slats can sit down into the tray later. Use either 1 ¼" long brad nails or wood screws to secure.

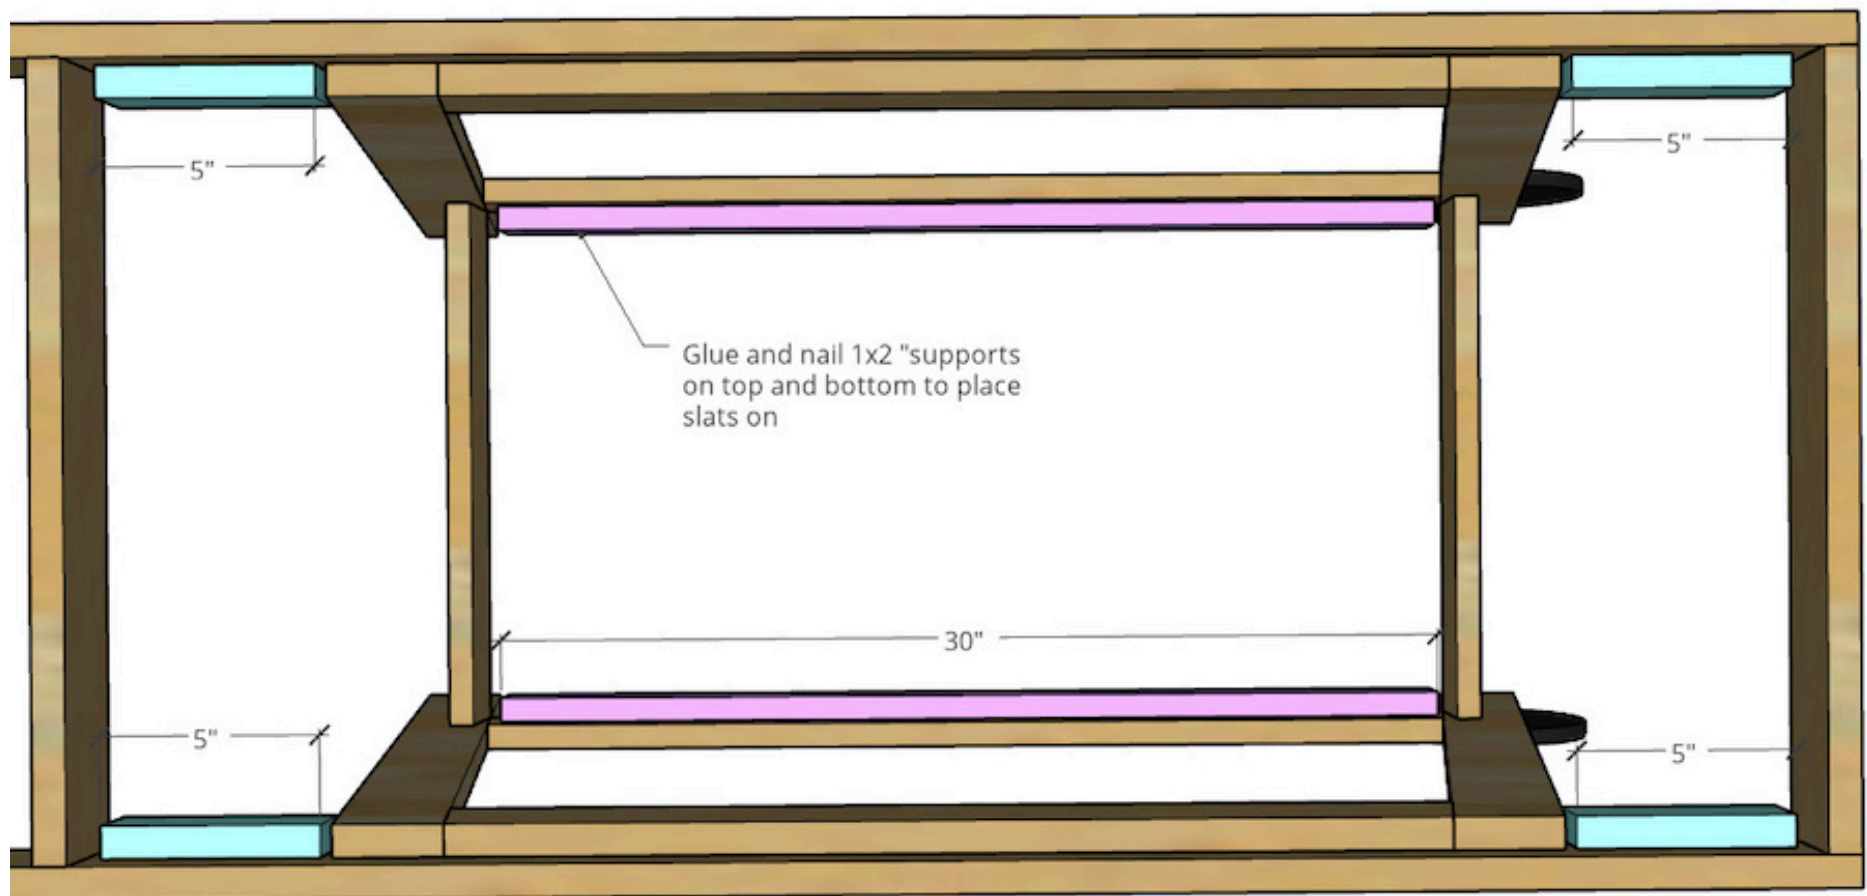

DIARIES

7

Add Wheels


You can use any size or material wheel for this you'd like. You can cut your own wooden wheels, but I used these 7" plastic lawn mower wheels. Place the cart on a flat, level surface and place a level on the top tray and/or bottom front/back frame pieces. Raise the "short leg side" up until the top tray and bottom frame are level (approx. 2" or so off the floor) and clamp the wheels onto the short legs at this height. Drill a hole through the center of the wheels through the short legs and secure with a bolt and a nut. The size of the bolt isn't critical, but it should be just SLIGHTLY smaller in diameter than the hole you drill and long enough to go through the wheel and the leg and be able to tighten the bolt onto the inside. You want the wheel to be loose enough to turn freely, but not so loose that they wobble or bow.



8

Install Shelf Slats

Cut (5) 1x6 boards to 16 ¼" long and place along bottom shelf slat supports. Cut (7) 1x6 boards to 17 ¾" and place along top support slats. Evenly space the slats and IF DESIRED, secure with 1 ¼" brad nails and/or 1 ¼" screws. You don't have to secure the slats—that's optional.

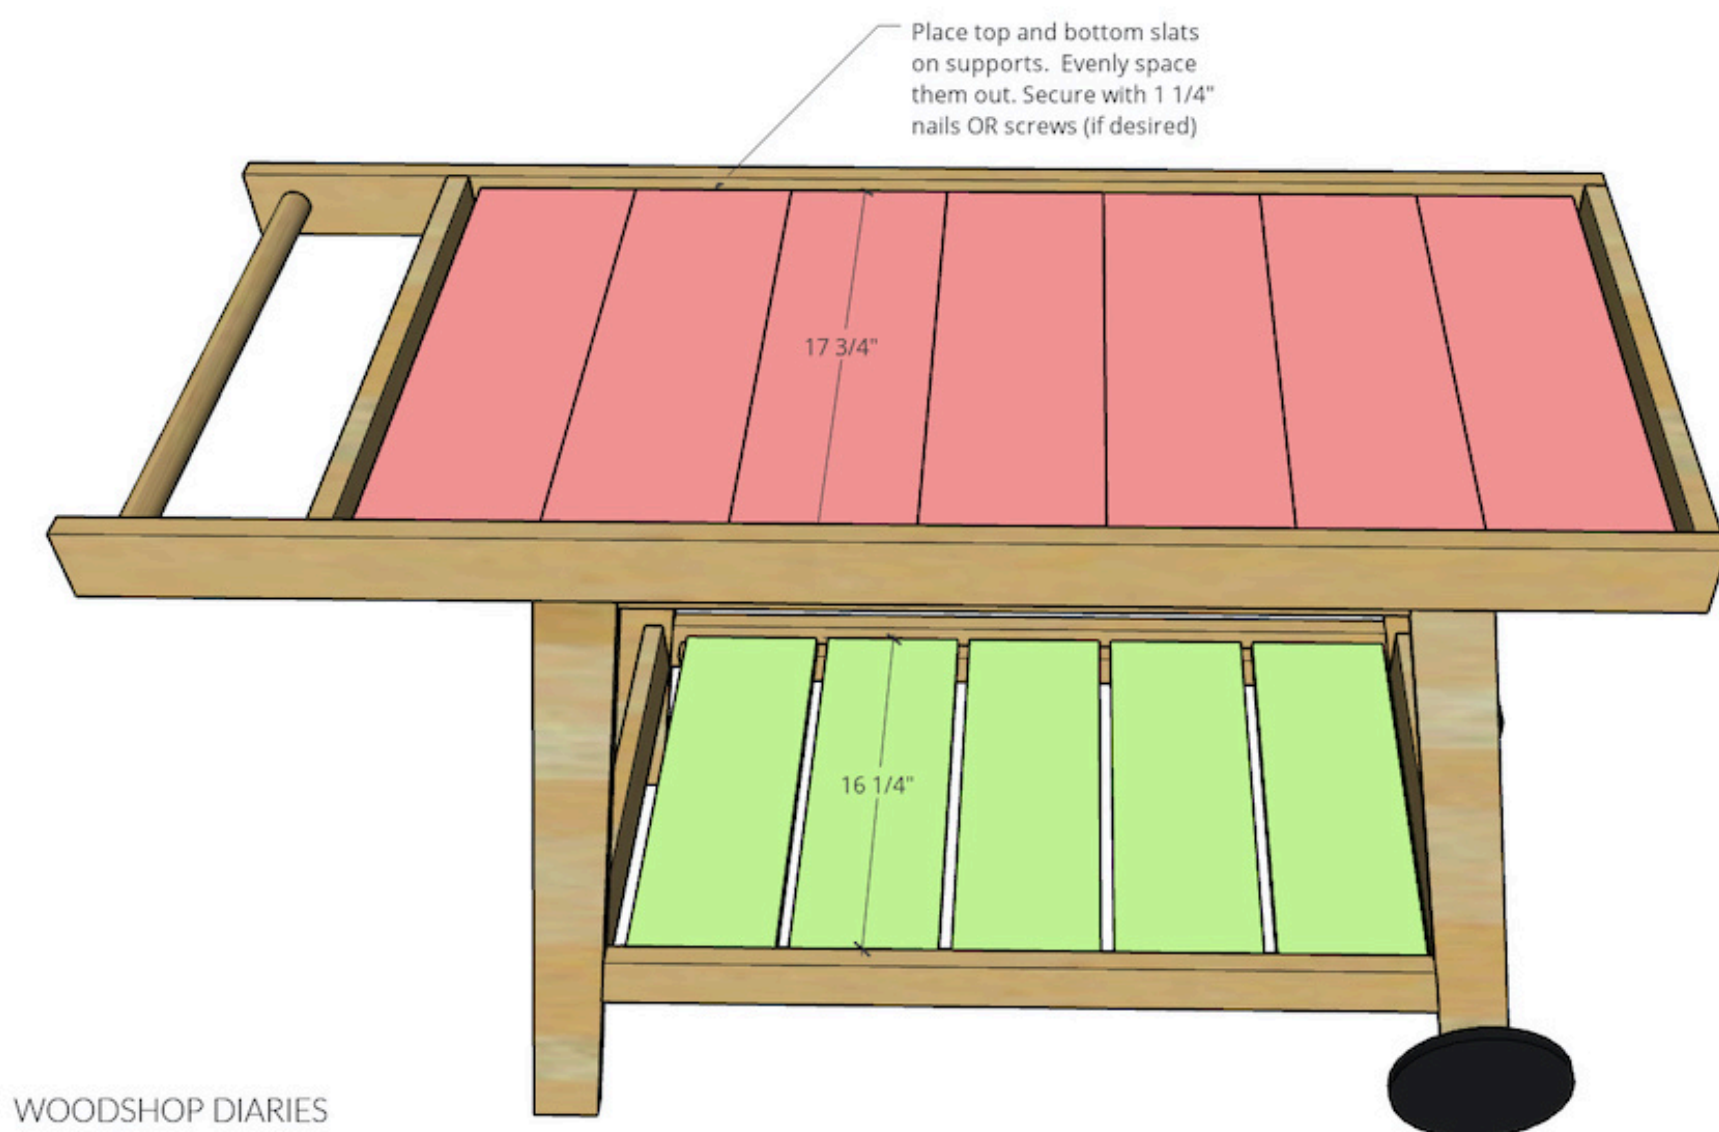

9

Finish As Desired

Apply paint and/or stain as desired making sure to use an exterior finish if you plan to use this outdoors.