

# Upholstered Bench with Faux Metal Frame

By **Sawdust Sisters**

Difficulty

Easy

This bench is perfect for small spaces. The faux fur upholstered seat is soft and comfortable. The frame is made with 2x2s and spray painted to resemble metal.



# Tools

## Kreg Tools



[Kreg® Pocket-Hole Jig 720](#)

## Other Tools

Miter Saw

Tape Measure

Impact Driver

Sander

# Materials

## Wood Products

**4** Board , 2x2 , 96"

**1** Board , 1x12 , 72"


## Hardware & Supplies

**24** 2-1/2" Pocket Hole Screws

**8** 2" Wood Screws

# Cut List & Parts


- 4 Frame-See Diagram , 2x2x8
- 1 Seat- To Be Upholstered , 1x12x 54"

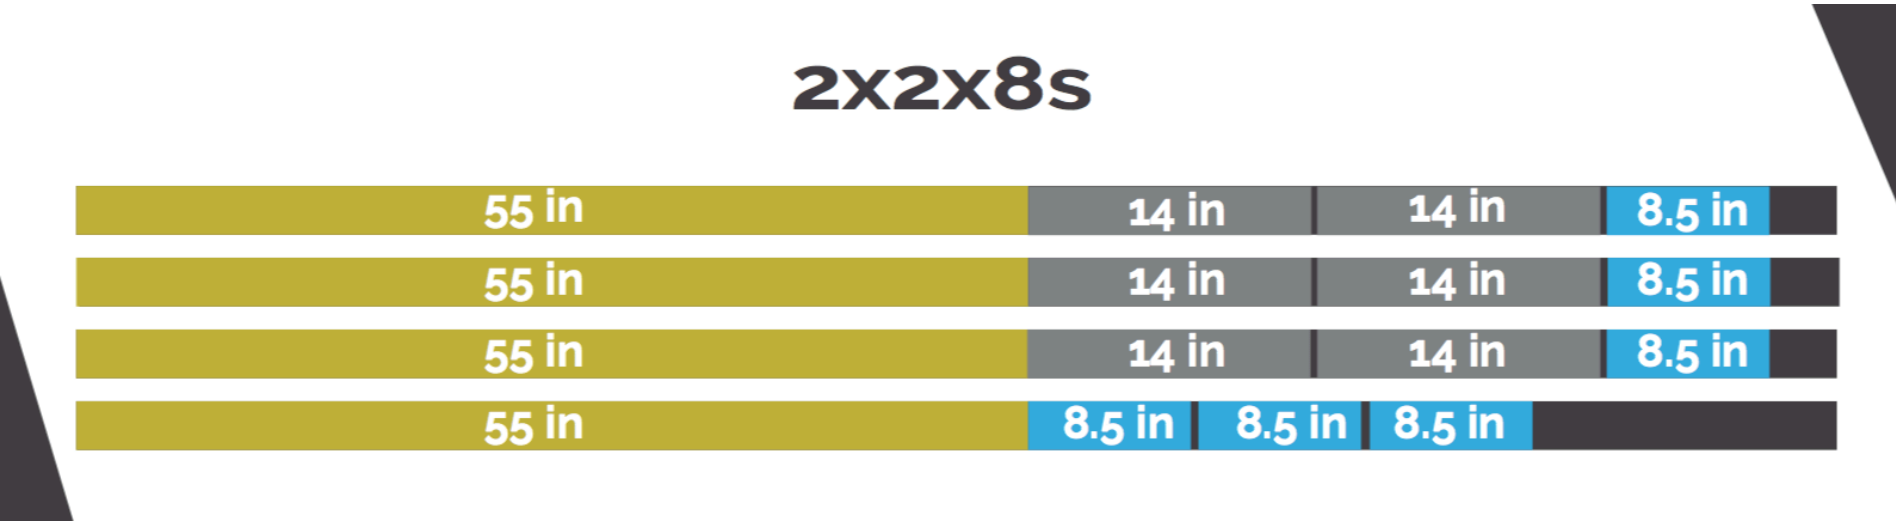

# Directions

**1****Build the top & bottom of the frame**


Cut the 2x2 pieces as shown on the cut list. Drill pocket holes on the 8-1/2" pieces, where the blue arrows point. Then assemble the pieces as shown, using 2-1/2" pocket screws. You will end up with two identical pieces that will make the top and bottom of the frame.

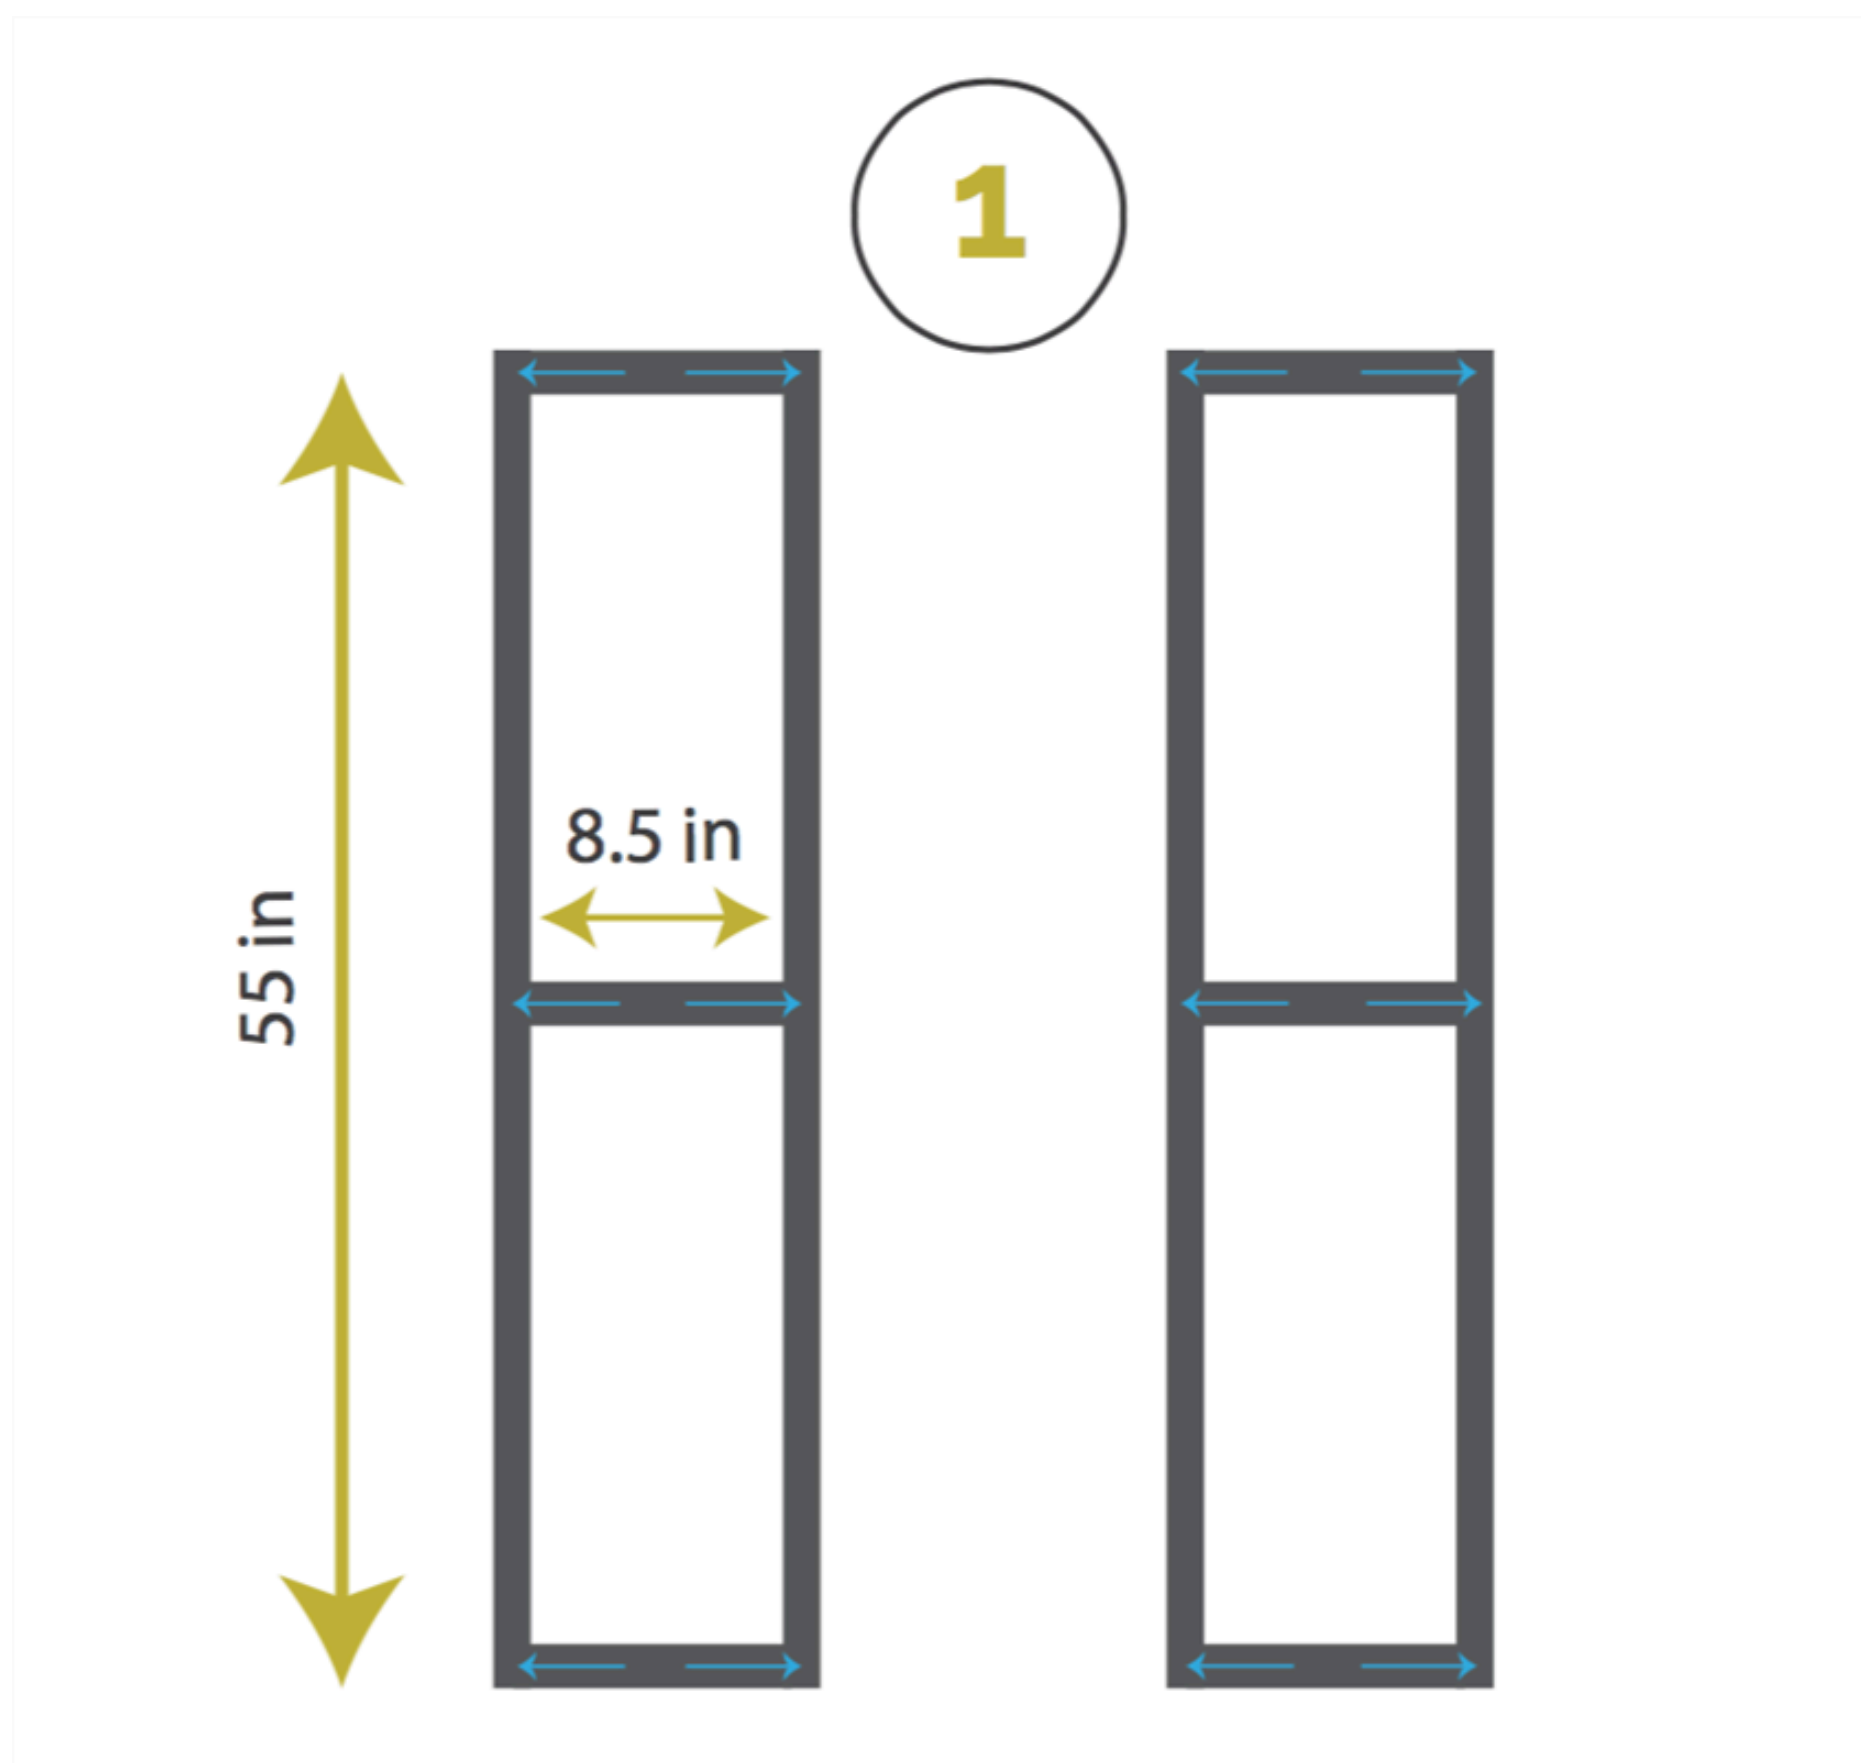

**2****Put the top and bottom together**

Drill pocket holes on the 14" inch vertical pieces and use them to put the two pieces together using 2-1/2" pocket screws.

Make sure the pocket holes face the inside of the frame.

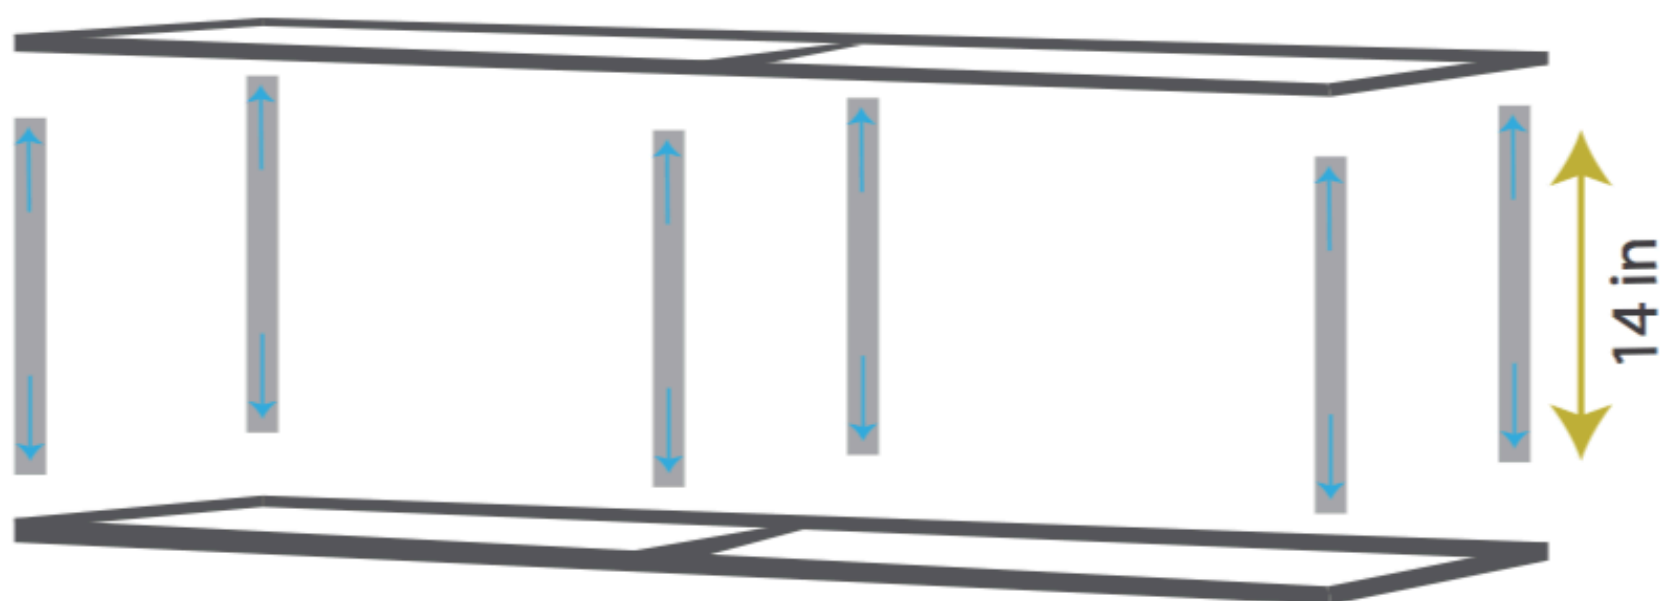**2**

### 3

#### Attach the Seat

At this point I sanded and painted the frame. I used a metallic silver spray paint to give the wood the appearance of metal. I also upholstered the seat. Once the paint is dry and upholstery completed, I attached the frame to the seat using 2" wood screws as shown by the arrows. Tip: Visit the link under the "Extras" tab for more details, including video instructions for upholstering the seat.

Enjoy your bench!

